

**BCV62**

Dual Bipolar Transistor(PNP+PNP)



Features


- Low Current
- Low Voltage
- Matched Pairs

Applications

- Applications With Working Point Independent of Temperature
- Current Mirrors

Mechanical Data

- Case: SOT-143
- Molding Compound, UL Flammability Classification Rating 94V-0
- Terminals: Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208

**SOT-143**

Maximum Ratings (@ $T_A=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Units
MAXIMUM RATINGS			
V_{CBO}	Collector-Base Voltage	-30	V
V_{CEO}	Collector-Emitter Voltage	-30	V
V_{EBO}	Emitter-Base Voltage	-6	V
I_C	Collector Current - Continuous	-0.1	A
I_{CM}	Collector Current – Peak	-0.2	A
Thermal Characteristic			
P_{tot} (Note1)	Total Power Dissipation, $T_a \leq 25^\circ\text{C}$	250	mW
T_J	Junction Temperature	150	$^\circ\text{C}$
T_j, T_{stg}	Junction and Storage Temperature	-65 to +150	$^\circ\text{C}$
$R_{th(j-a)}$ (Note 1)	Thermal resistance from junction to ambient	500	$^\circ\text{C}/\text{W}$



BCV62

Dual Bipolar Transistor(PNP+PNP)

Electrical Characteristics (@ $T_A=25^\circ C$ unless otherwise specified)


Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = -100\mu A, I_E = 0$	-30	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-30	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -100\mu A, I_C = 0$	-6	-	-	V
RCollector Cut-Off Current	I_{CBO}	$V_{CB} = -30V, I_E = 0$	-	-	-15	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB} = -5V, I_C = 0$	-	-	-100	nA
DC Current Gain (Note 1)	h_{FE}	$V_{CE} = -5V, I_C = -100\mu A$	100	-	-	-
		$V_{CE} = -5V, I_C = -2mA$				
		BCV62	100		800	
		BCV62A	125		250	
		BCV62B	220		475	
		BCV62C	420		800	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -10mA, I_B = -0.5mA$ $I_C = -100mA, I_B = -5mA$	-	-	-0.3 -0.65	V
Base-Emitter Saturation Voltage (Note 2)	$V_{BE(sat)}$	$I_C = -10mA, I_B = -0.5mA$ $I_C = -100mA, I_B = -5mA$	-	-0.7 -1	-	V
Base-Emitter Turn-on Voltage (Note 3)	$V_{BE(on)}$	$I_C = -2mA, V_{CE} = -5V$ $I_C = -10mA, V_{CE} = -5V$	-0.6 -	-	-0.75 -0.82	V
Transition Frequency	f_T	$V_{CE} = -5V, I_C = -10mA,$ $f = 100MHz$	100	-	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	4.5	-	pF

Notes:

- 1: Device mounted on an FR4 PCB.
- 2: V_{BEsat} decreases by about 1.7 mV/K with increasing temperature.
- 3: V_{BE} decreases by about 2 mV/K with increasing temperature.




Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

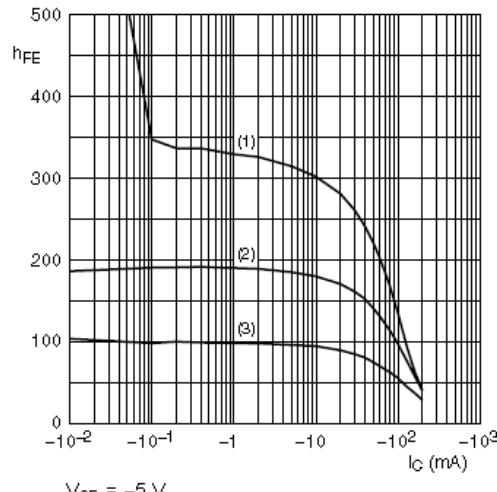


- $V_{CE} = -5 \text{ V}$
(1) $T_{amb} = 150 \text{ }^\circ\text{C}$
(2) $T_{amb} = 25 \text{ }^\circ\text{C}$
(3) $T_{amb} = -55 \text{ }^\circ\text{C}$

Fig 1. BCV62A: DC current gain as a function of collector current; typical values

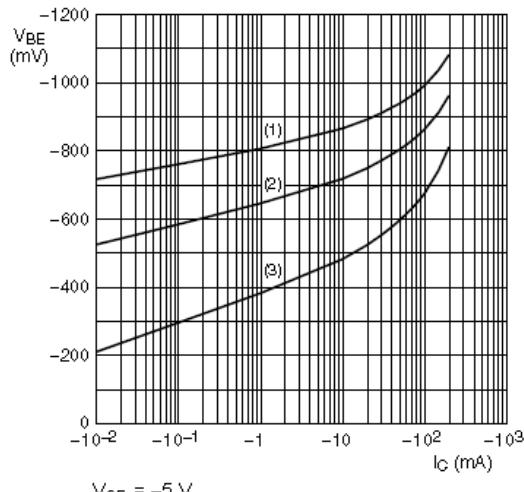


- $V_{CE} = -5 \text{ V}$
(1) $T_{amb} = -55 \text{ }^\circ\text{C}$
(2) $T_{amb} = 25 \text{ }^\circ\text{C}$
(3) $T_{amb} = 150 \text{ }^\circ\text{C}$

Fig 2. BCV62A: Base-emitter voltage as a function of collector current; typical values

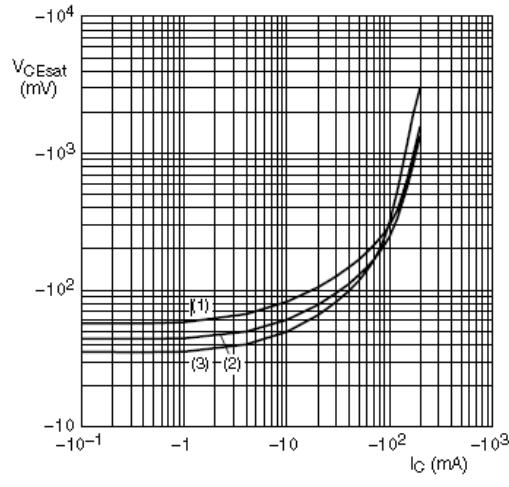


- $I_C/I_B = 20$
(1) $T_{amb} = 150 \text{ }^\circ\text{C}$
(2) $T_{amb} = 25 \text{ }^\circ\text{C}$
(3) $T_{amb} = -55 \text{ }^\circ\text{C}$

Fig 3. BCV62A: Collector-emitter saturation voltage as a function of collector current; typical values

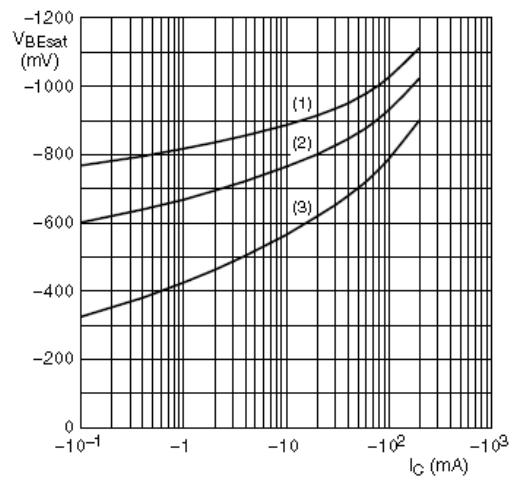


- $I_C/I_B = 20$
(1) $T_{amb} = -55 \text{ }^\circ\text{C}$
(2) $T_{amb} = 25 \text{ }^\circ\text{C}$
(3) $T_{amb} = 150 \text{ }^\circ\text{C}$

Fig 4. BCV62A: Base-emitter saturation voltage as a function of collector current; typical values

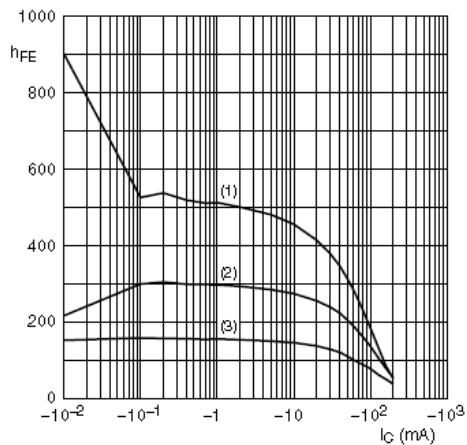


$V_{CE} = -5 \text{ V}$
(1) $T_{amb} = 150 \text{ }^{\circ}\text{C}$
(2) $T_{amb} = 25 \text{ }^{\circ}\text{C}$
(3) $T_{amb} = -55 \text{ }^{\circ}\text{C}$

Fig 5. BCV62B: DC current gain as a function of collector current; typical values

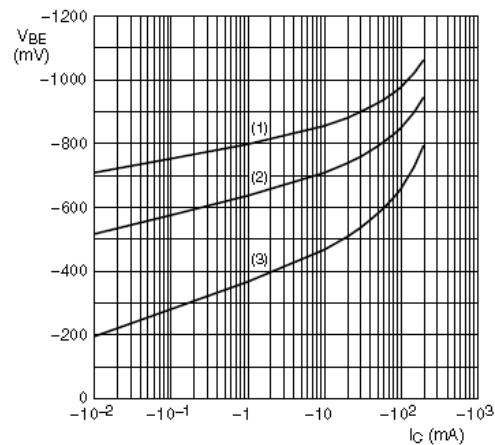


$V_{CE} = -5 \text{ V}$
(1) $T_{amb} = -55 \text{ }^{\circ}\text{C}$
(2) $T_{amb} = 25 \text{ }^{\circ}\text{C}$
(3) $T_{amb} = 150 \text{ }^{\circ}\text{C}$

Fig 6. BCV62B: Base-emitter voltage as a function of collector current; typical values

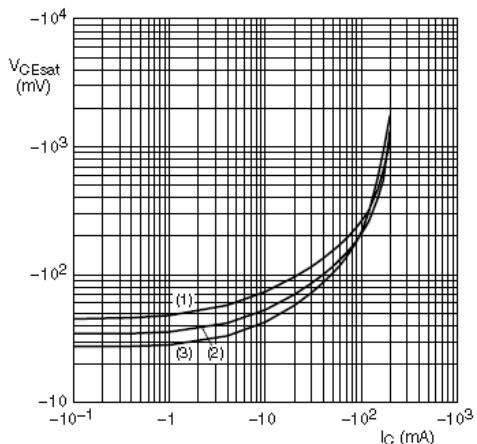


$I_C/I_B = 20$
(1) $T_{amb} = 150 \text{ }^{\circ}\text{C}$
(2) $T_{amb} = 25 \text{ }^{\circ}\text{C}$
(3) $T_{amb} = -55 \text{ }^{\circ}\text{C}$

Fig 7. BCV62B: Collector-emitter saturation voltage as a function of collector current; typical values

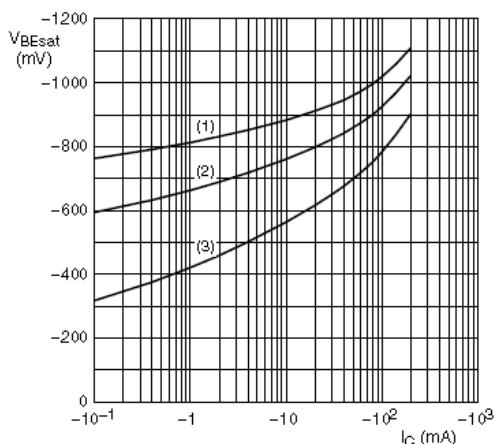

$I_C/I_B = 20$
(1) $T_{amb} = -55 \text{ }^{\circ}\text{C}$
(2) $T_{amb} = 25 \text{ }^{\circ}\text{C}$
(3) $T_{amb} = 150 \text{ }^{\circ}\text{C}$


Fig 8. BCV62B: Base-emitter saturation voltage as a function of collector current; typical values

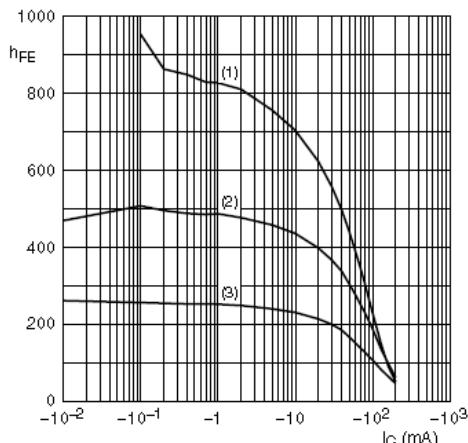

$V_{CE} = -5 \text{ V}$

- (1) $T_{amb} = 150 \text{ }^{\circ}\text{C}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C}$
- (3) $T_{amb} = -55 \text{ }^{\circ}\text{C}$


Fig 9. BCV62C: DC current gain as a function of collector current; typical values

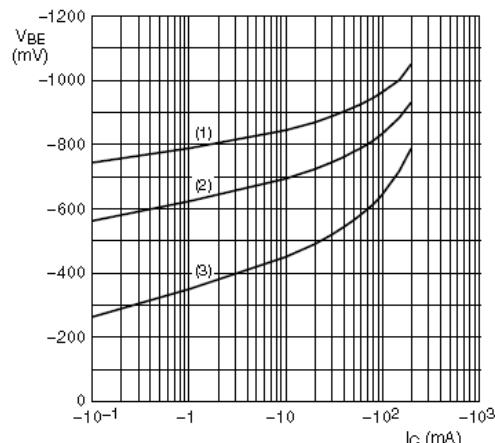

$V_{CE} = -5 \text{ V}$

- (1) $T_{amb} = -55 \text{ }^{\circ}\text{C}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C}$
- (3) $T_{amb} = 150 \text{ }^{\circ}\text{C}$


Fig 10. BCV62C: Base-emitter voltage as a function of collector current; typical values

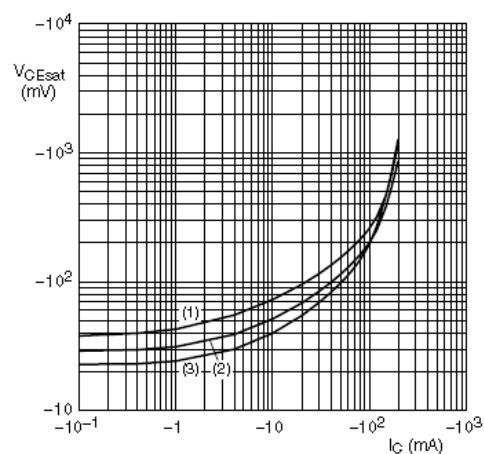

$I_C/I_B = 20$

- (1) $T_{amb} = 150 \text{ }^{\circ}\text{C}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C}$
- (3) $T_{amb} = -55 \text{ }^{\circ}\text{C}$

Fig 11. BCV62C: Collector-emitter saturation voltage as a function of collector current; typical values

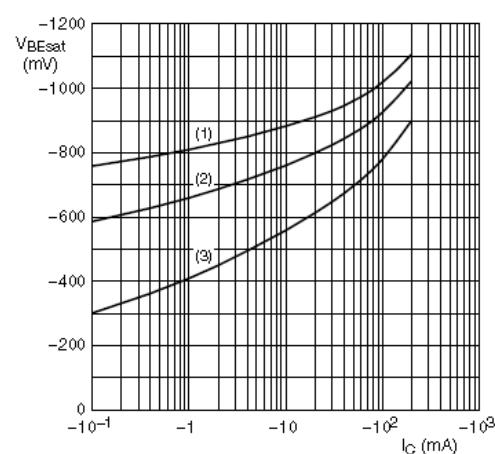


$I_C/I_B = 20$

- (1) $T_{amb} = -55 \text{ }^{\circ}\text{C}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C}$
- (3) $T_{amb} = 150 \text{ }^{\circ}\text{C}$


Fig 12. BCV62C: Base-emitter saturation voltage as a function of collector current; typical values

**BCV62**

PNP General-purpose Double Transistor

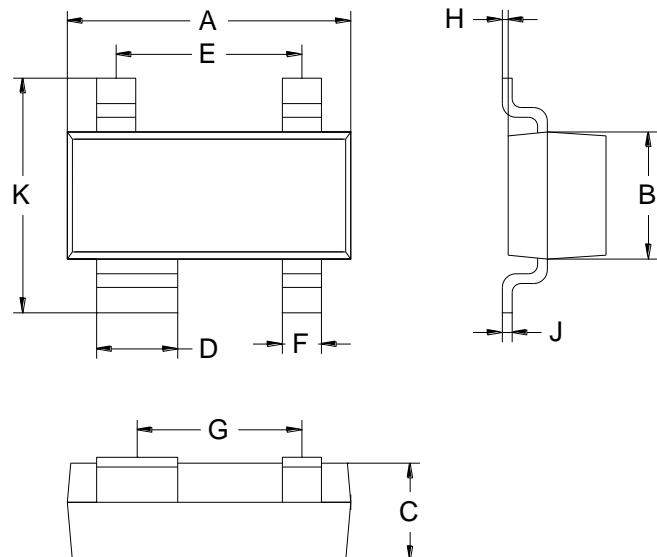**Package Outline Dimensions(unit:mm)****SOT-143**

SOT-143		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.78	0.88
E	1.80	2.00
F	0.37	0.43
G	1.59	1.79
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

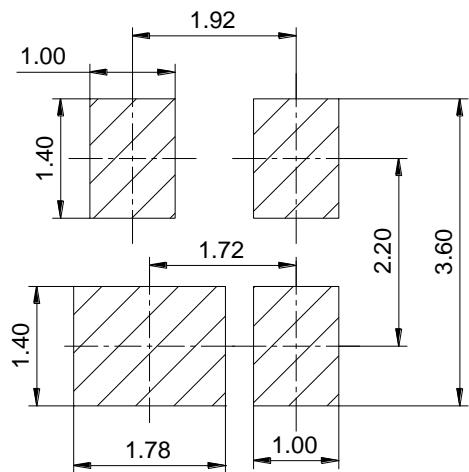SOLDERING FOOTPRINT(unit:mm)**SOT-143****Ordering Information**

Part Number	Package	Shipping	Marking Code
BCV62	SOT-143	3000 pcs / Tape & Reel	3Mp
BCV62A	SOT-143	3000 pcs / Tape & Reel	3Jp
BCV62B	SOT-143	3000 pcs / Tape & Reel	3Kp
BCV62C	SOT-143	3000 pcs / Tape & Reel	3Lp