



VOLTAGE RANGE: 100 --- 600 V
CURRENT: 1.0 A




Features

- ◇ Low cost
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.26 grams
- ◇ Mounting position: Any

DO - 41

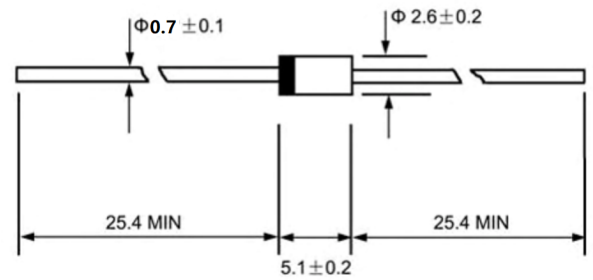

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

Type Number	Symbol	ER101	ER102	ER103	ER104	ER106	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	100	200	300	400	600	V
Maximum RMS voltage	V_{RMS}	70	140	210	280	420	V
Maximum DC blocking voltage	V_{DC}	100	200	300	400	600	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	1.0					A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$	I_{FSM}	30.0					A
Maximum instantaneous forward voltage @ 1.0A	V_F	0.95		1.25		1.7	V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	I_R	5.0 150.0					μA
Maximum reverse recovery time (Note 1)	t_{rr}	35					ns
Typical junction capacitance (Note 2)	C_J	22					pF
Typical thermal resistance (Note 3)	$R_{\theta JA}$	50					$^\circ C/W$
Operating junction temperature range	T_J	- 55 ----- + 150					$^\circ C$
Storage temperature range	T_{STG}	- 55 ----- + 150					$^\circ C$

NOTE: 1. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.



2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient.



Ratings AND Characteristic Curves

FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC




NOTES:1.RISE TIME = 7ns MAX.INPUT IMPEDANCE = 1MΩ.22pF.
2.RISE TIME =10ns MAX.SOURCE IMPEDANCE=50 Ω.

SET TIME BASE FOR 10/20 ns/cm

FIG.2 – TYPICAL FORWARD CHARACTERISTIC


INSTANTANEOUS FORWARD CURRENT, AMPERES

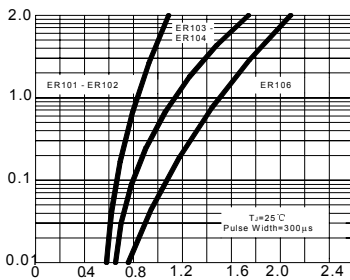

INSTANTANEOUS FORWARD VOLTAGE, VOLTS

FIG.3 – FORWARD DERATING CURVE


AVERAGE FORWARD CURRENT AMPERES

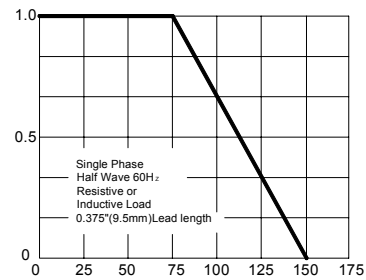

AMBIENT TEMPERATURE, °C

FIG.4 – TYPICAL JUNCTION CAPACITANCE


JUNCTION CAPACITANCE,pF

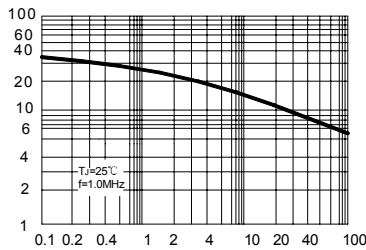

REVERSE VOLTAGE,VOLTS

FIG.5 – PEAK FORWARD SURGE CURRENT


PEAK FORWARD SURGE CURRENT, AMPERES

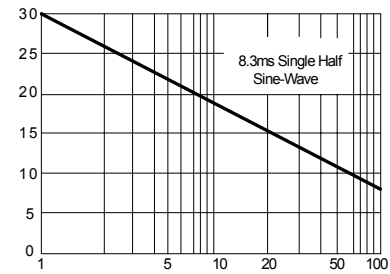

NUMBER OF CYCLES AT 60Hz

FIG.6 – TYPICAL REVERSE CHARACTERISTICS

INSTANTANEOUS REVERSE CURRENT, MICROAMPERES



PERCENT OF RATED PEAK REVERSE VOLTAGE. %

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-41	5000/AMMO	50000	42X28X31	14.00	12.00