



### DO-201AD




### Features

- ✦ High efficiency, Low VF
- ✦ High current capability
- ✦ High reliability
- ✦ High surge current capability
- ✦ Low power loss

### Mechanical Data

- ✦ Cases: Molded plastic
- ✦ Epoxy: UL 94V-0 rate flame retardant
- ✦ Polarity: Color band denotes cathode
- ✦ High temperature soldering guaranteed:  
260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✦ Weight: 1.2 grams

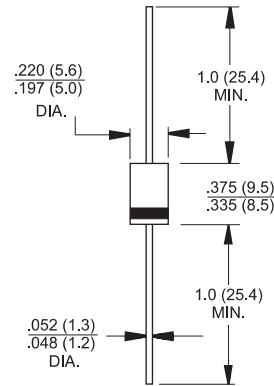

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.




For capacitive load, derate current by 20%

Type Number	Symbol	BY251	BY252	BY253	BY254	BY255	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	200	400	600	800	1300	V
Maximum RMS Voltage	$V_{RMS}$	140	280	420	560	910	V
Maximum DC Blocking Voltage	$V_{DC}$	200	400	600	800	1300	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ $T_A = 75^\circ C$	$I_{(AV)}$	3.0					A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	$I_{FSM}$	150					A
Maximum Instantaneous Forward Voltage @ 3.0A	$V_F$	1.0					V
Maximum DC Reverse Current @ $T_A=25^\circ C$ at Rated DC Blocking Voltage @ $T_A=125^\circ C$	$I_R$	5.0 100					uA uA
Maximum Full Load Reverse Current, Full Cycle Average .375"(9.5mm) Lead Length @ $T_L=75^\circ C$	$HT_{IR}$	30					uA
Typical Junction Capacitance ( Note 1 )	$C_j$	40					pF
Typical Thermal Resistance ( Note 2 )	$R_{\theta JA}$	40					°C/W
Operating Temperature Range	$T_J$	-65 to +150					°C
Storage Temperature Range	$T_{STG}$	-65 to +150					°C


- Notes:
1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.
  2. Mount on Cu-Pad Size 16mm x 16mm on P.C.B.




### RATINGS AND CHARACTERISTIC CURVES (BY251 THRU BY255)

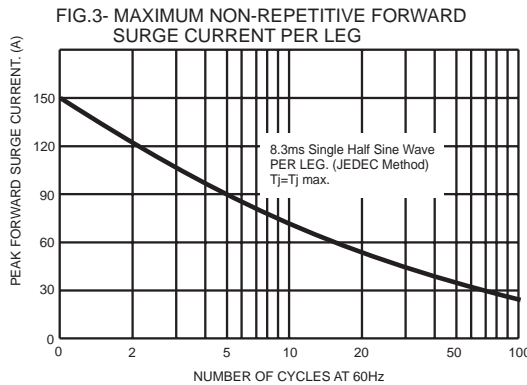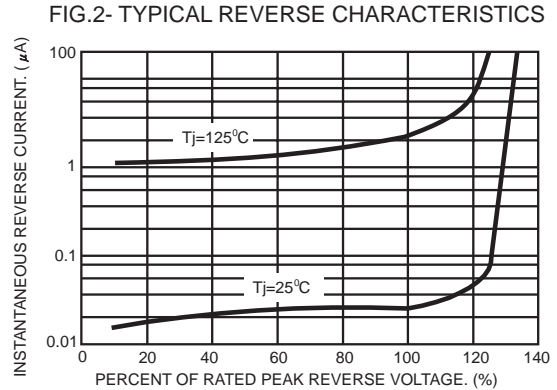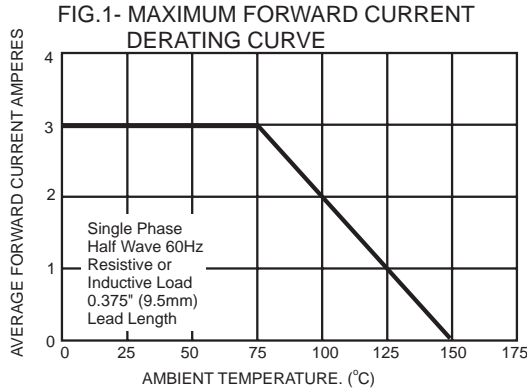

**FIG.5- TYPICAL FORWARD CHARACTERISTICS**

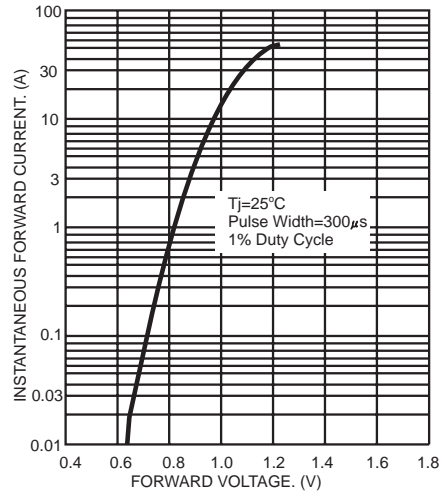

**FIG.4- TYPICAL JUNCTION CAPACITANCE**

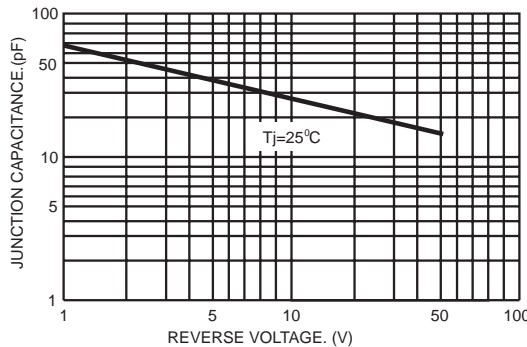

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-27	1250/AMMO	12500	40X26.5X30	14.00	12.00