



FR1010C-FR1060C

Fast Recovery Rectifiers



VOLTAGE RANGE: 100 --- 600 V
CURRENT: 10 A




TO-220AB

Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC TO-220AB, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.071 ounces, 2.006 grams
- ◇ Mounting position: Any

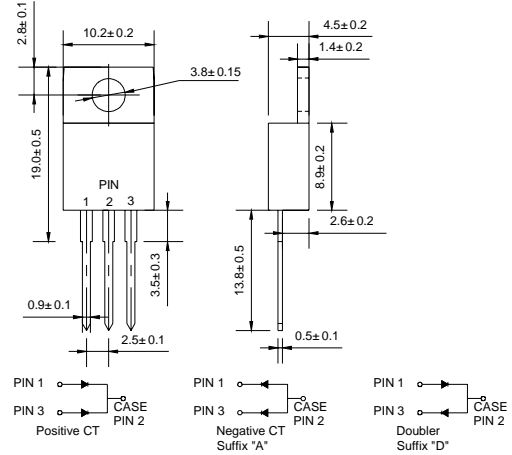

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

Parameter	Symbol	FR 1010C	FR 1020C	FR 1030C	FR 1040C	FR 1060C	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	100	200	300	400	600	V
Maximum RMS voltage	V_{RMS}	70	140	210	280	420	V
Maximum DC blocking voltage	V_{DC}	100	200	300	400	600	V
Maximum average forward rectified current @ $T_A=75^\circ\text{C}$	$I_{F(AV)}$	10					A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	I_{FSM}	100					A
Maximum instantaneous forward voltage @ 5.0 A	V_F	1.3					V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	I_R	10 150					μA
Maximum reverse recovery time (Note1)	t_{rr}	150				250	ns
Typical junction capacitance (Note2)	C_J	28					pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	3.0					$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	- 55 ---- +150					$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 ---- + 150					$^\circ\text{C}$

NOTE:1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.



Ratings AND Characteristic Curves

FIG.1 – FORWARD DERATING CURVE

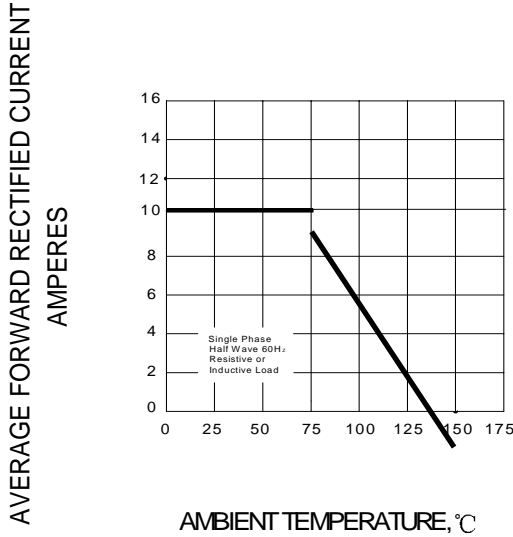


FIG.2-PEAK FORWARD SURGE CURRENT

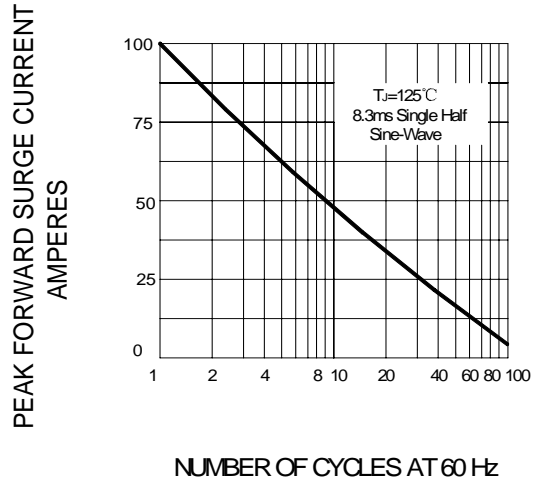


FIG.3-TYPICAL JUNCTION CAPACITANCE

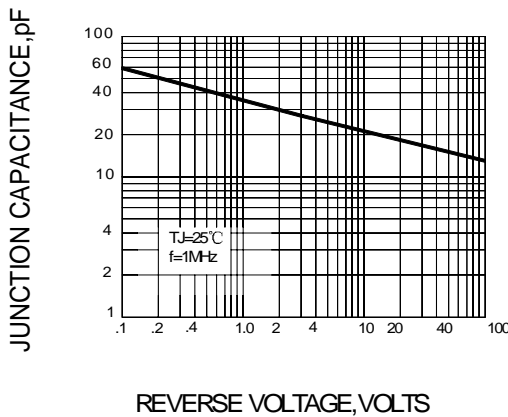


FIG.4 – TYPICAL FORWARD CHARACTERISTIC



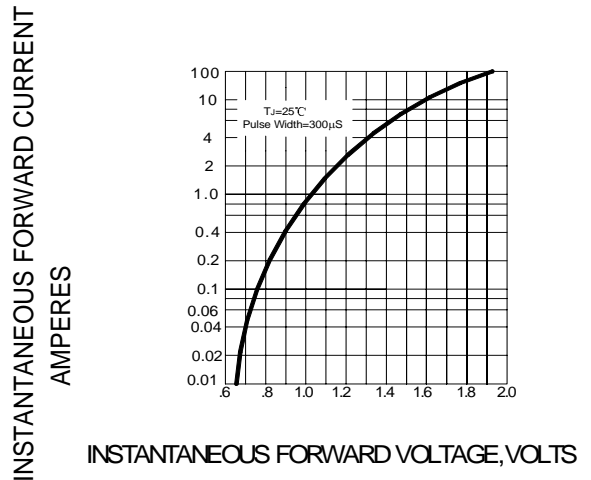


FIG5 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

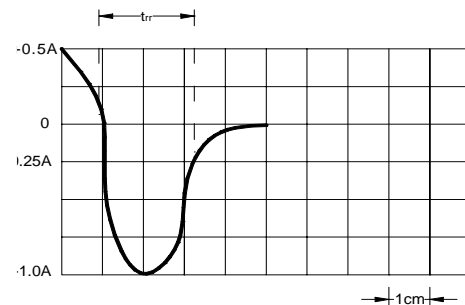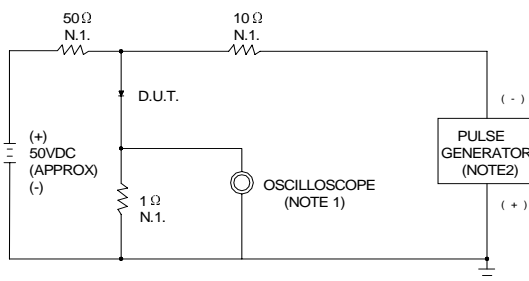

NOTES:1.RISE TIME=7ns MAX. INPUT IMPEDANCE=1MΩ, 22pF
2.RISE TIME=10ns MAX. SOURCE IMPEDANCE=50Ω

SET TIME BASE FOR 50/100 ns/cm

Package	Packing	Box Size L×W×H(mm)	Quantity(pcs/box)	Carton Size L×W×H(mm)	Quantity(pcs/carton)
TO-220	50pcs/Tube	558×148×38	1000	565×225×175	5000