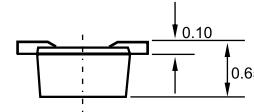
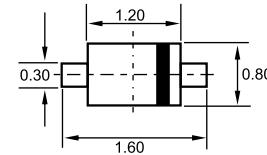

SOD-523


Dimensions in inches and (millimeters)

Features

- ✧ High reliability with high surge current handing capability.
- ✧ Small package.
- ✧ High speed.

Applications

- ✧ High speed switching.

Ordering Information

Type No.	Marking	Package Code
1SS422	6	SOD-523

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Parameter	Symbol	Limits	Unit
Peak reverse voltage	V _{RM}	100	V
RMS Reverse voltage	V _{RMS}	70	V
DC Reverse voltage	V _R	85	V
Peak surge forward current @t=1s	I _{FSM}	500	mA
Total power dissipation	P _{tot}	150	mW
Junction temperature	T _j	125	°C
Storage temperature	T _{stg}	-55-125	°C

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V _F			1.2	V	I _F =150mA
Reverse current	I _R			0.1	µA	V _R =85V
Diode capacitance	C _d			3.0	pF	V _R =0.5V,f=1MHz
Reverse recovery time	t _{rr}			4	ns	V _R =6V,I _F =10mA,R _L =100Ω



TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

FIG. 1 - SURGE CURRENT CHARACTERISTICS

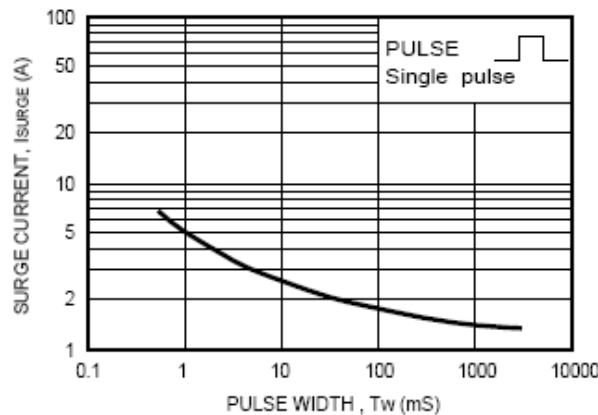


FIG. 2 - FORWARD CHARACTERISTICS

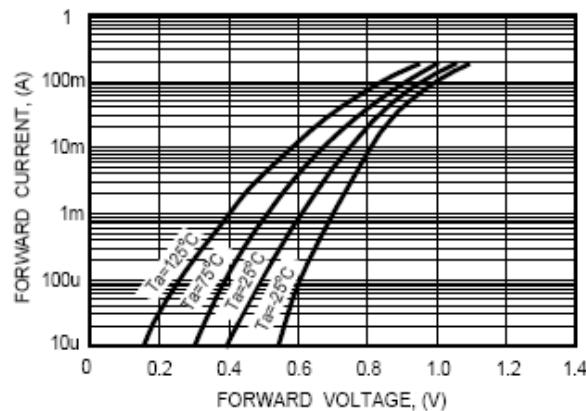


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

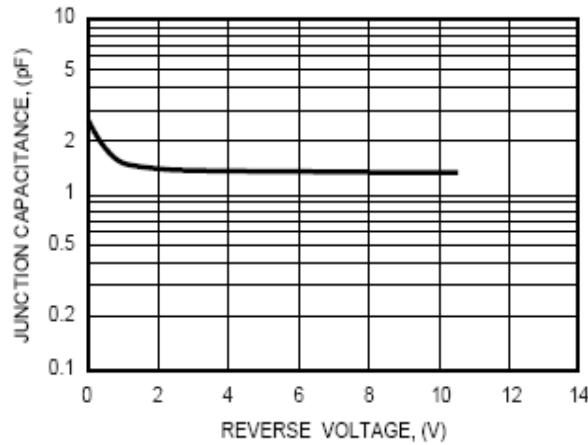


FIG. 4 - REVERSE CHARACTERISTICS

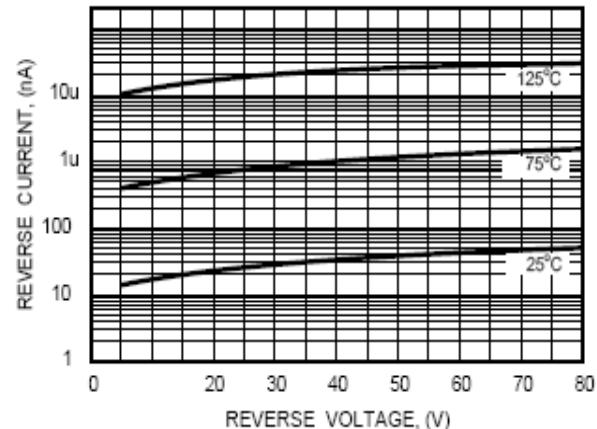


FIG. 5 - REVERSE RECOVERY TIME

