





FEATURES

- For high-speed switching Applications.
- Common anode



APPLICATIONS

- High speed switching application.


SOT-323

ORDERING INFORMATION

Type No.	Marking	Package Code
BAW56W	KJC	SOT-323

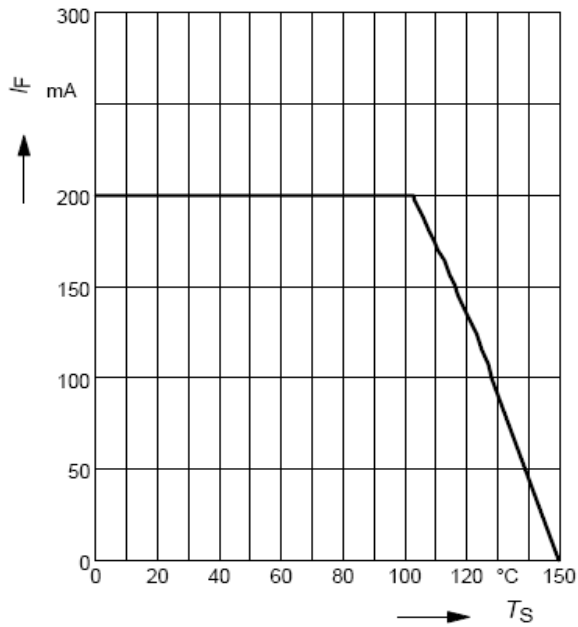
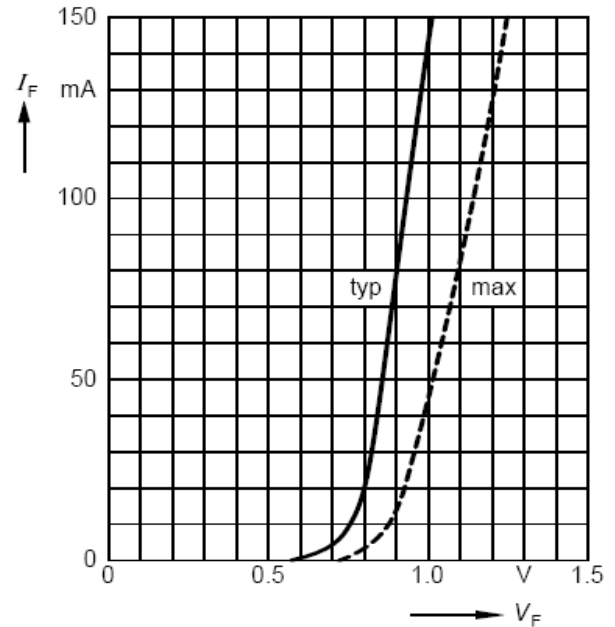
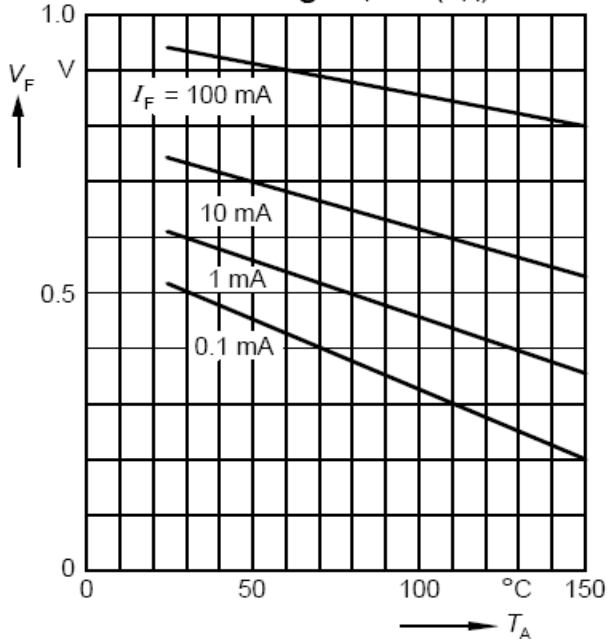
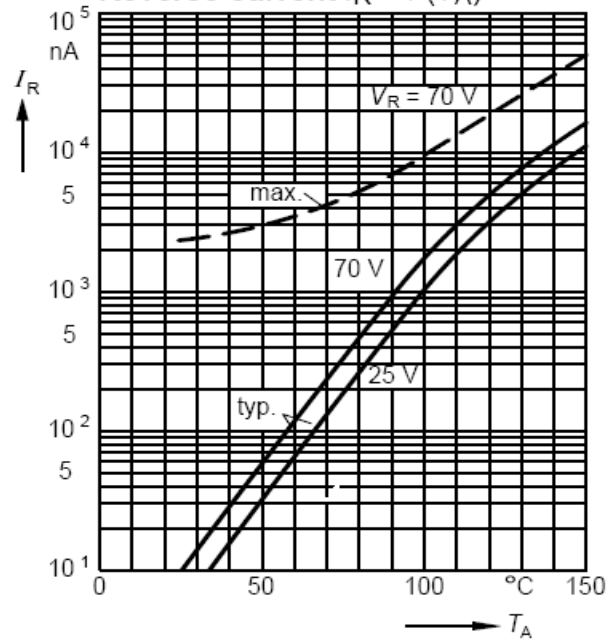
□: none is for Lead Free package;
 "G" is for Halogen Free package.

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Characteristic	Symbol	Limits	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	70	V
Working peak reverse voltage	V_{RWM}		
DC Reverse Voltage	V_R		
Forward Continuous Current	I_F	200	mA
Surge forward Current	I_{FS}	4.5	A
Power Dissipation	P_d	200	mW
Operating Junction Temperature Range	T_j	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

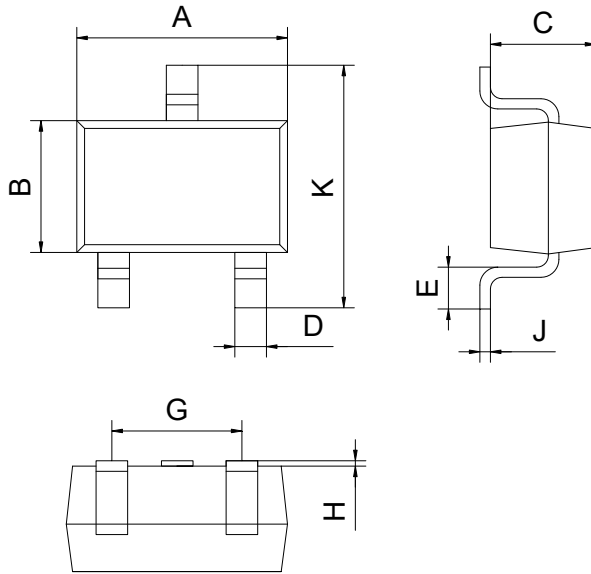
ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Characteristic	Symbol	Min	MAX	UNIT	Test Condition
Reverse Breakdown Voltage	$V_{(BR)R}$	70	-	V	$I_R=100\mu A$
Forward Voltage	V_F	-	715 855 1000 1250	mV	$I_F=1mA$ $I_F=10mA$ $I_F=50mA$ $I_F=150mA$
Reverse Leakage Current	I_R	-	2.5	μA	$V_R=70V$
Diode Capacitance	C_D	-	2	pF	$V_R=0V, f=1MHz$
Reverse Recovery Time	t_{rr}	-	6	ns	$I_F=I_R=10mA, f=1MHz$

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified
Forward current $I_F = f(T_S)$

Forward current $I_F = f(V_F)$

Forward voltage $V_F = f(T_A)$

Reverse current $I_R = f(T_A)$


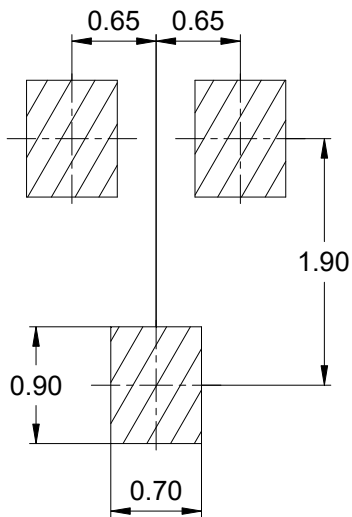
PACKAGE OUTLINE

Plastic surface mounted package



SOT-323		
Dim	Min	Max
A	2.00	2.20
B	1.15	1.35
C	0.90	1.10
D	0.15	0.35
E	0.25	0.40
G	1.20	1.40
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40
All Dimensions in mm		

SOLDERING FOOTPRINT



Unit : mm

PACKAGE INFORMATION

Device	Package	Shipping
BAW56W	SOT-323	3000/Tape&Reel