



Reverse Voltage: 20Volts


Forward Current:0.035Amps



Features

- ◇ Metal-to-silicon junction
- ◇ High breakdown voltage
- ◇ Low turn-on voltage
- ◇ Ultrafast switching speed
- ◇ Primarily intended for high level UHF/MHF detection and pulse applications with broad dynamic range

DO - 35(GLASS)

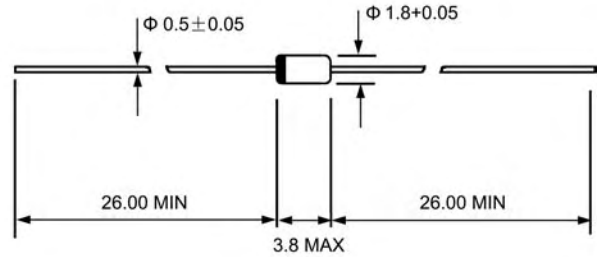

Dimensions in millimeters

Mechanical Data

- ◇ Case: JEDEC DO-35, glass case
- ◇ Polarity: Color band denotes cathode end
- ◇ Weight: Approx. 0.13 gram

ABSOLUTE RATINGS(LIMITING VALUES)

	Symbols	Value	UNITS
Peak reverse voltage	V_{RRM}	20.0	V
Power dissipation (Infinite Heat Sink)	P_{tot}	430.0	mW
Forward continuous current	I_{FSM}	35.0	mA
Junction and storage temperature range	T_J/T_{STG}	-55 ---+ 150	°C
Maximum lead temperature for soldering during 10S at 4mm from case	T_L	230	°C

ELECTRICAL CHARACTERISTICS

	Symbols	Min.	Typ.	Max.	UNITS
Reverse breakdown voltage @ $I_R=10\mu A$	V_R	20.0			V
Leakage current @ $V_R=16V$	I_R			150	nA
Forward voltage drop @ $I_F=1mA$	V_F			0.41	V
Test pulse: $t_p \leq 300\mu s$ $\delta < 2\%$ $I_F=35mA$				1.0	
Junction capacitance @ $V_R=0V, f=1MHz$	C_J			2	pF
Thermal resistance	$R_{\theta JA}$			400	KW

Ratings AND Characteristic Curves

FIG.1 – TYPICAL CURRENT VERSUS FORWARD VOLTAGE AT DIFFERENT TEMPERATURES (TYPICAL VALUES)


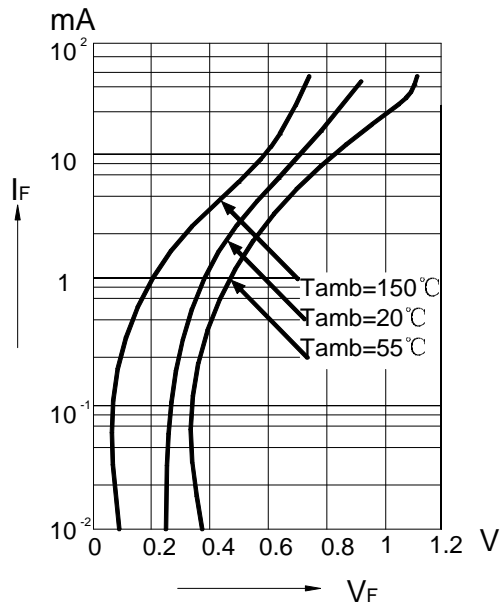


FIG.2 – FORWARD CURRENT VERSUS FORWARD VOLTAGE (TYPICAL VALUES)



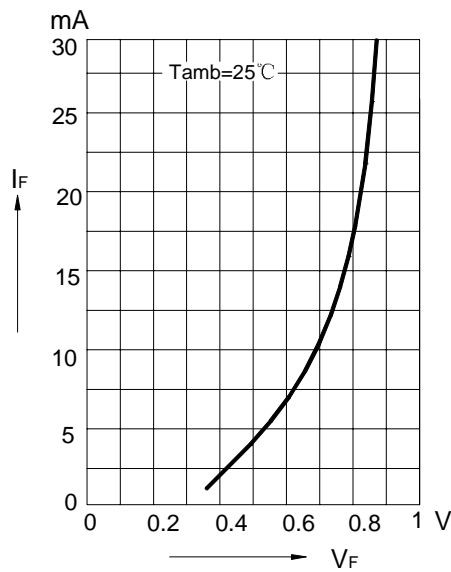

Ratings AND Characteristic Curves

FIG.3 – REVERSE CURRENT VERSUS AMBIENT TEMPERATURE

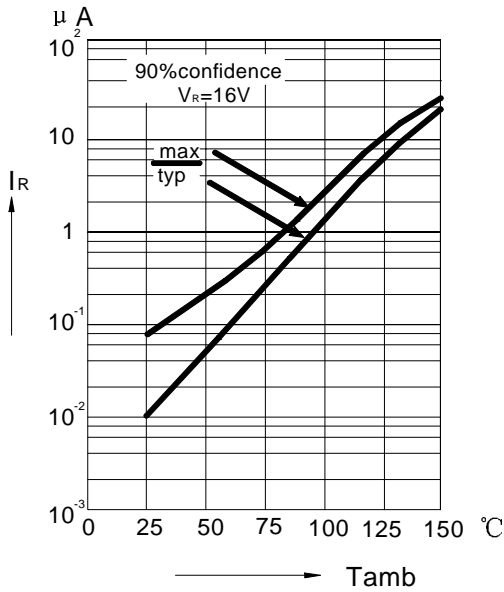


FIG.4 – REVERSE CURRENT VERSUS CONTINUOUS REVERSE VOLTAGE (TYPICAL VALUES)


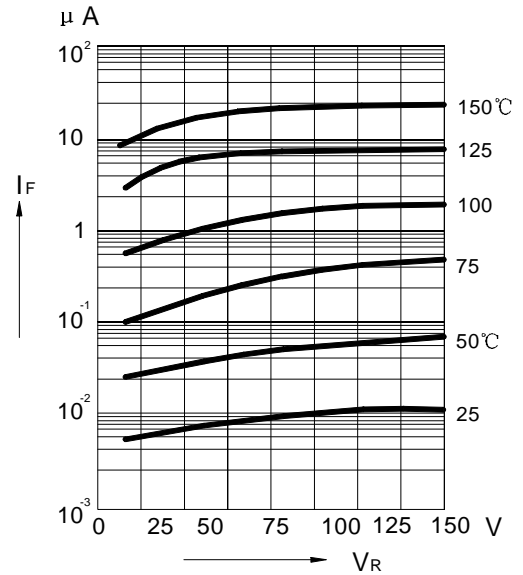


FIG.5 – CAPACITANCE VERSUS REVERSE APPLIED VOLTAGE V_R (TYPICAL VALUES)

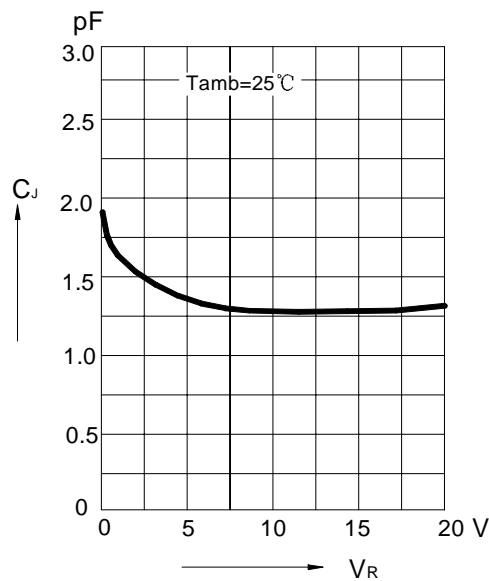

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-35	5000/AMMO	100000	41X28.5X38	14.57	13.07