




Reverse Voltage:40-60Volts
Forward Current:0.03Amps



Features

- For general purpose applications
- The low forward voltage drop and fast switching marking it ideal for protection of MOS devices, steering, biasing and coupling diodes for fast switching and low logic level applications.
- Integrated protection ring against static discharge
- Low leakage current

MINI-MELF

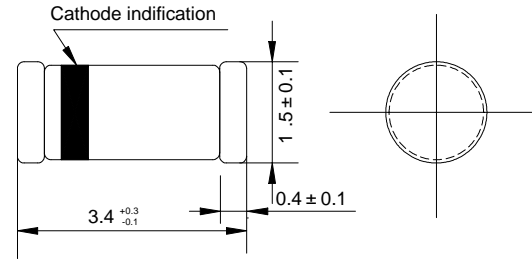

Dimensions in millimeters

Mechanical Data

- Case: MINI-MELF
- Polarity: Color band denotes cathode
- Weight: Approx 0.031 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

ABSOLUTE MAXIMUM RATINGS AND THERMAL RESISTANCE

		LL101A	LL101B	LL101C	Unit
Reverse voltage	V_R	60	50	40	V
Repetitive peak reverse voltage	V_{RRM}	60	50	40	V
Forward current	$I_{(AV)}$	30			m A
Maximum single cycle surge 10 μ s square wave	I_{FSM}	2.0			A
Power dissipation	P_{tot}	400			mW
Thermal resistance junction to ambient	$R_{\theta JA}$	320 ¹⁾			K/W
Junction temperature	T_j	125			
Storage temperature range	T_{STG}	- 55 --- + 150			

¹⁾ Device mounted on PC board 50mm×50mm×1.6mm .



ELECTRICAL CHARACTERISTICS

Parameter	Test Conditions		Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F=1\text{mA}$	LL101A	V_F	-	-	0.41	V
	$I_F=1\text{mA}$	LL101B		-	-	0.40	
	$I_F=1\text{mA}$	LL101C		-	-	0.39	
	$I_F=15\text{mA}$	LL101A		-	-	1.00	
	$I_F=15\text{mA}$	LL101B		-	-	0.95	
	$I_F=15\text{mA}$	LL101C		-	-	0.90	
Reverse current	$V_R=50\text{V}$	LL101A	I_R	-	-	200	n A
	$V_R=40\text{V}$	LL101B		-	-	200	
	$V_R=30\text{V}$	LL101C		-	-	200	
Breakdown voltage	$I_R=10\mu\text{A}$	LL101A	$V_{(BR)}$	60	-	-	V
		LL101B		50	-	-	
		LL101C		40	-	-	
Diode capacitance	$V_R=0, f=1\text{MHz}$	LL101A	C_D	-	-	2.0	pF
		LL101B		-	-	2.1	
		LL101C		-	-	2.2	
Reverse recovery time	$I_F=I_R=5\text{mA}, \text{recover to } 0.1i_R$		t_{rr}	-	-	1.0	ns



Ratings AND Characteristic Curves

FIG.1 – TYP. I_F VS V_F FOR PRIMARY CONDUCTION THROUGH THE SCHOTTKY BARRIERS

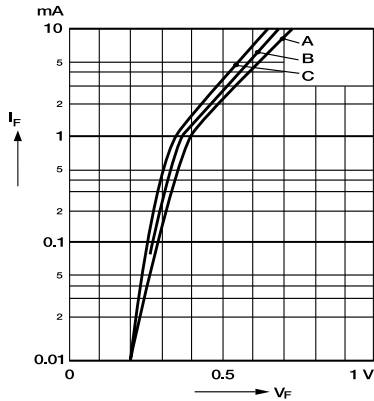


FIG.2 – TYP. I_F OF COMBINATION SCHOTTKY BARRIER AND PN JUNCTION GUARD RING

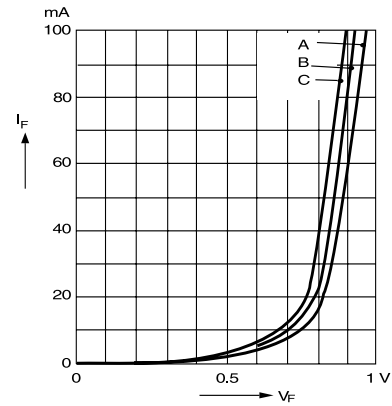


FIG.3 – TYPICAL VARIATION OF REVERSE CURRENT AT VARIOUS TEMPERATURES


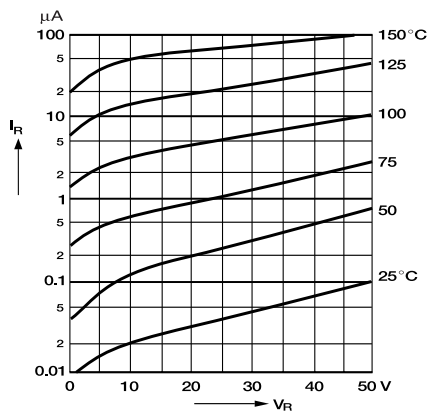


FIG.4 – TYPICAL CAPACITANCE CURVE AS A FUNCTION OF REVERSE VOLTAGE

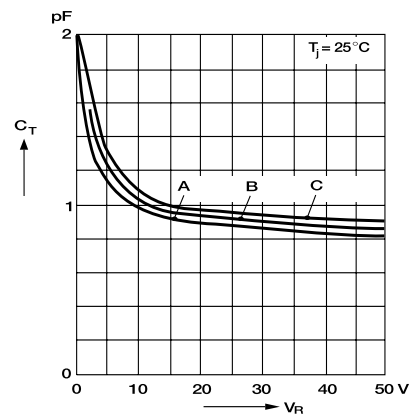

Package	Reel	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)
minimelf	2500pcs	7inch	20000pcs	186×186×105	120,000pcs	443×215×305