




Features

- ✧ The output voltage can be adjusted to 36V
- ✧ Low dynamic output impedance ,its typical value is 0.2Ω
- ✧ Trapping current capability is 1 to 100mA
- ✧ The typical value of the equivalent temperature factor in the whole temperature scope is $50 \text{ ppm}/^\circ\text{C}$
- ✧ The effective temperature compensation in the working range of full temperature
- ✧ Low output noise voltage
- ✧ Fast on -state response



1. REFERENCE
2. CATHODE
3. ANODE

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Cathode Voltage	V_{KA}	37	V
Cathode Current Range (Continuous)	I_{KA}	-100-+150	mA
Reference Input Current Range	I_{ref}	0.05-+10	mA
Power Dissipation	P_D	350	mW
Operating temperature	T_{opr}	0-70	°C
Storage temperature Range	T_{stg}	-65-+150 °C	°C

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Reference Input Voltage	V_{ref}	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$	2.450	2.5	2.550	V
Deviation of reference input Voltage Over temperature (note)	$\Delta V_{ref}/\Delta T$	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$ $T_{min} \leq T_a \leq T_{max}$		4.5	17	mV
Ratio Of Change in Reference Input Voltage to the change in Cathode Voltage	$\Delta V_{ref}/\Delta V_{KA}$	$I_{KA}=10\text{mA}$	$\Delta V_{KA} = 10\text{V} \sim V_{REF}$	-1.0	-2.7	mV/V
			$\Delta V_{KA} = 36\text{V} \sim 10\text{V}$	-0.5	-2.0	mV/V
Reference Input Current	I_{ref}	$I_{KA}=10\text{mA}, R_1=10\text{K}\Omega$ $R_2=\infty$		1.5	4	μA
Deviation Of Reference Input Current Over Full Temperature Range	$\Delta I_{ref}/\Delta T$	$I_{KA}=10\text{mA}, R_1=10\text{K}\Omega$ $R_2=\infty$ $T_A=\text{full Temperature}$		0.4	1.2	μA
Minimum cathode current for regulation	$I_{KA(min)}$	$V_{KA}=V_{REF}$		0.45	1.0	mA
Off-state cathode Current	$I_{KA(OFF)}$	$V_{KA}=36\text{V}, V_{REF}=0$		0.05	1.0	μA
Dynamic Impedance	Z_{KA}	$V_{KA}=V_{REF}, I_{KA}=1 \text{ to } 100\text{mA}$ $f \leq 1.0\text{KHz}$		0.15	0.5	Ω


Note: $T_{min}=0^\circ\text{C}$, $T_{max}=+70^\circ\text{C}$

CLASSIFICATION OF V_{ref}


Rank	0.5%	1%	2%
Range	2.487-2.512	2.475-2.525	2.450-2.550




Typical Characteristics

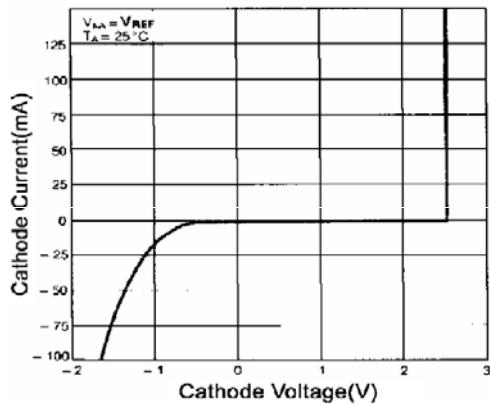


Cathode Current vs. Cathode Voltage

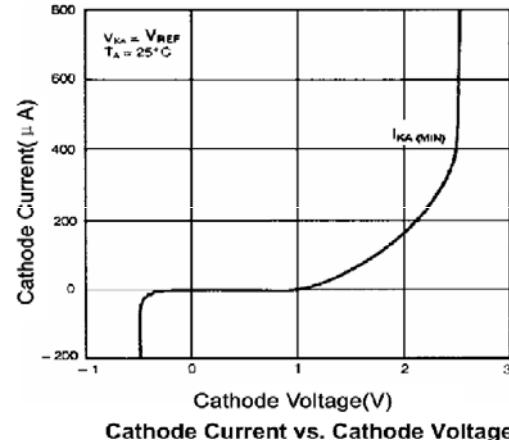


Cathode Current vs. Cathode Voltage

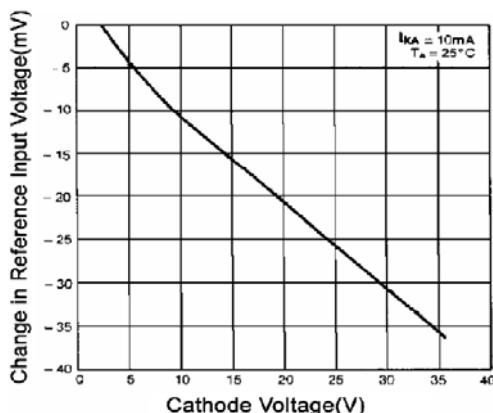


Change in Reference Input Voltage vs. Cathode Voltage

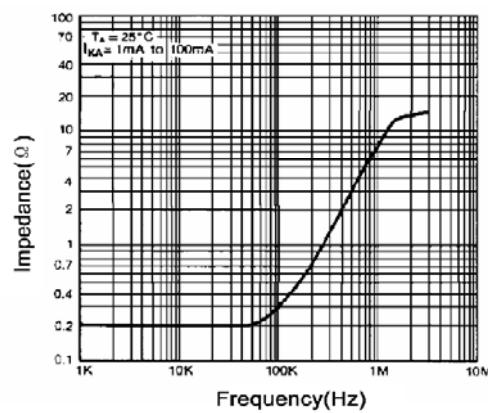

Dynamic Impedance Frequency

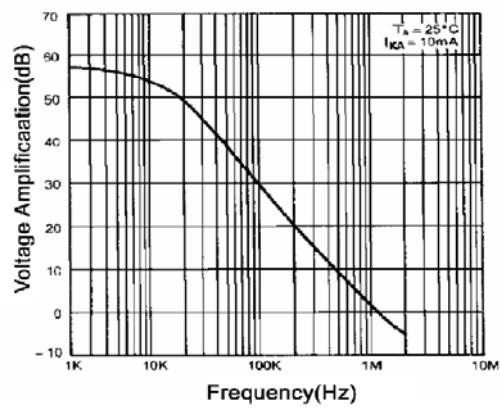

Small Signal Voltage Amplification vs. Frequency

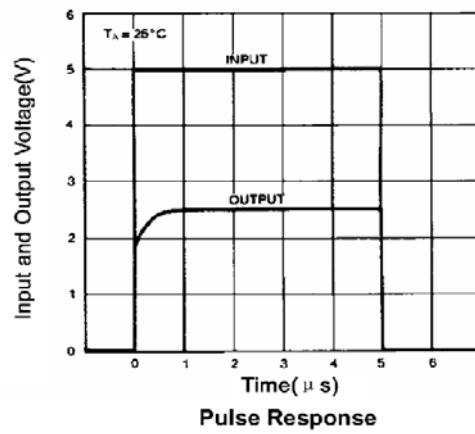


Pulse Response



TL431
Adjustable Accurate Reference Source



OUTSIDE DEMENSION AND INTERNAL CONFIGURATION (SOT-23)

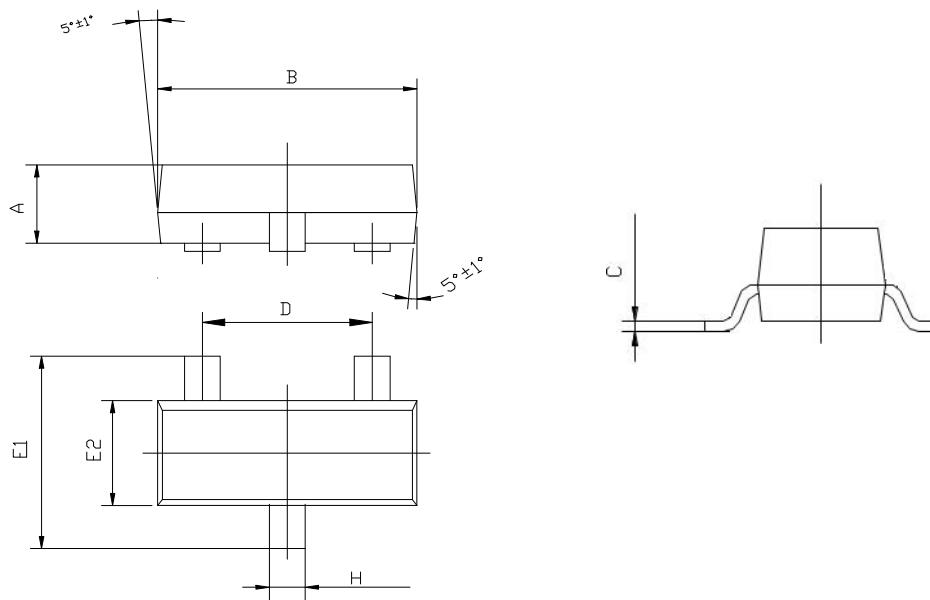

Symbol	Dimensions in Millimeters		
	Min	Nominal	Max
A	0.95	1.000	1.200
B	2.00	2.900	3.000
C	0.85	0.100	0.150
D	1.800	1.900	2.000
E1	2.00	2.400	2.600
E2	1.00	1.300	1.400
H	0.300	0.400	0.500

Device	Package	Shipping
TL431	SOT-23	3000/Tape&Reel