





Features

- If adequate heat sinking is provided, they can deliver over 1.0A output current
- Thermal overload protection
- Short circuit protection
- Output transistor SOA protection

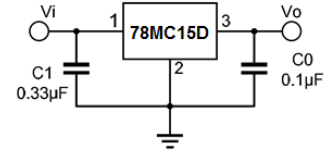

Mechanical Data

- Case: TO-252
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



TO-252

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
78MC15D	TO-252	80 pcs / Tube or 2500 pcs / Tape & Reel	78MC15D

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V _I	35	V

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-to-Air	R _{θJA}	105	°C/W
Thermal Resistance Junction-to-Case	R _{θJC}	5	°C/W
Operating Temperature Range	T _{OPR}	-40 ~ +125	°C
Storage Temperature Range	T _{STG}	-65 ~ +150	°C




Electrical Characteristics ($I_o = 500\text{mA}$, $V_i = 21\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$	14.4	15	15.6	V
		$5\text{mA} < I_o < 1\text{A}$, $P_o < 15\text{W}$ $17.5\text{V} \leq V_i \leq 30\text{V}$	14.25	15	15.75	V
Line Regulation	ΔV_o	$17.5\text{V} \leq V_i \leq 30\text{V}$, $T_J = 25^\circ\text{C}$	-	15	300	mV
		$20\text{V} \leq V_i \leq 26\text{V}$, $T_J = 25^\circ\text{C}$	-	7	150	mV
Load Regulation	ΔV_o	$5\text{mA} \leq I_o \leq 1\text{A}$, $T_J = 25^\circ\text{C}$	-	25	300	mV
		$0.25\text{A} \leq I_o \leq 0.75\text{A}$, $T_J = 25^\circ\text{C}$	-	10	150	mV
Quiescent Current	I_q	$T_J = 25^\circ\text{C}$	-	5	8	mA
Quiescent Current Change	ΔI_q	$5\text{mA} \leq I_o \leq 1\text{A}$	-	-	0.5	mA
		$18\text{V} \leq V_i \leq 30\text{V}$, $I_o = 0.5\text{A}$	-	-	0.8	mA
Output Voltage Drift	$\Delta V_o / \Delta T$	$I_o = 5\text{mA}$, $0 \leq T_J \leq 125^\circ\text{C}$	-	1.8	-	$\text{mV}/^\circ\text{C}$
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{kHz}$, $T_A = 25^\circ\text{C}$	-	42	-	$\mu\text{V}/V_o$
Ripple Rejection	RR	$18\text{V} \leq V_i \leq 28\text{V}$, $f = 120\text{Hz}$	-	60	-	dB
Dropout Voltage	V_D	$I_o = 1\text{A}$, $T_J = 25^\circ\text{C}$	-	2	-	V
Output resistance	R_o	$f = 1\text{kHz}$	-	18	-	$\text{m}\Omega$
Short Circuit Current	I_{sc}	$V_i = 35\text{V}$, $T_A = 25^\circ\text{C}$	-	200	-	mA



Package Outline Dimensions (Unit: mm)

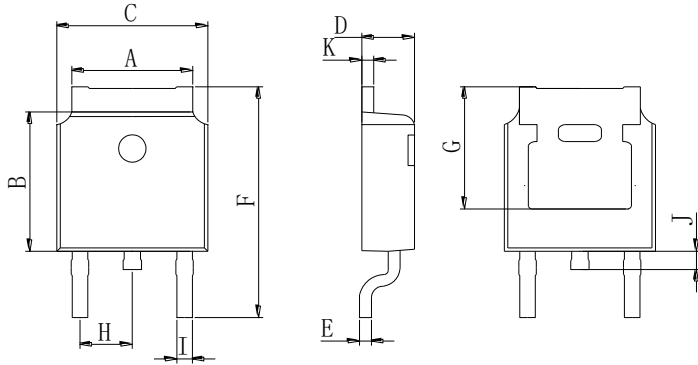

TO-252		
Dimension	Min.	Max.
A	5.05	5.65
B	5.80	6.40
C	6.25	6.85
D	2.20	2.40
E	0.40	0.60
F	9.71	10.31
G	5.05	5.65
H	2.10	2.50
I	0.70	0.90
J	0.50	0.70
K	0.40	0.60

Mounting Pad Layout (Unit: mm)

TO-252

