




TO-92

Features

- ◇ Maximum Output current
 $I_{OM}: 0.1 \text{ A}$
- ◇ Output voltage
 $V_o: -6 \text{ V}$
- ◇ Continuous total dissipation
 $P_D: 0.625 \text{ W}$



1. GND
2. IN
3. OUT

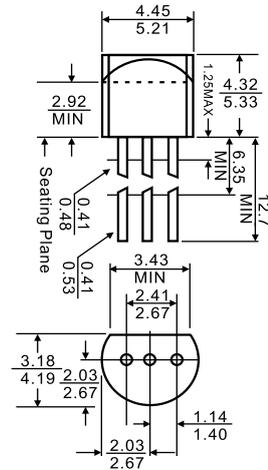

Dimensions in inches and (millimeters)


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

| Parameter | Symbol | Value | Units |
|--------------------------------------|-----------|----------|-------|
| Input Voltage | V_i | -30 | V |
| Operating Junction Temperature Range | T_{OPR} | 0~+125 | °C |
| Storage Temperature Range | T_{STG} | -55~+150 | °C |

ELECTRICAL CHARACTERISTICS ($V_i = -11V, I_o = 40mA, C_i = 0.33\mu F, C_o = 0.1\mu F$, unless otherwise specified)

| Parameter | Symbol | Test conditions | MIN | TYP | MAX | UNIT | |
|--------------------------|--------------|---|---------|------|-------|------|---|
| Output voltage | V_o | 25°C | -5.75 | -6.0 | -6.25 | V | |
| | | -8V ≤ V_i ≤ -20V, $I_o = 1mA \sim 40mA$ | 0-125°C | -5.7 | -6.0 | -6.3 | V |
| | | $I_o = 1mA \sim 70mA$ | | -5.7 | -6.0 | -6.3 | V |
| Load Regulation | ΔV_o | $I_o = 1mA \sim 100mA$ | 25°C | 21 | 80 | mV | |
| | | $I_o = 1mA \sim 40mA$ | 25°C | 11 | 40 | mV | |
| Line regulation | ΔV_o | -8V ≤ V_i ≤ -20V | 25°C | 20 | 175 | mV | |
| | | -9V ≤ V_i ≤ -20V | 25°C | 15 | 125 | mV | |
| Quiescent Current | I_q | 25°C | | 3.9 | 6.0 | mA | |
| Quiescent Current Change | ΔI_q | -9V ≤ V_i ≤ -20V | 0-125°C | | 1.5 | mA | |
| | ΔI_q | 1mA ≤ V_i ≤ 40mA | 0-125°C | | 0.1 | mA | |
| Output Noise Voltage | V_N | 10Hz ≤ f ≤ 100kHz | 25°C | 44 | | uV | |
| Ripple Rejection | RR | -9V ≤ V_i ≤ -19V, $f = 120Hz$ | 0-125°C | 40 | 48 | dB | |
| Dropout Voltage | V_d | 25°C | | 1.7 | | V | |

TYPICAL APPLICATION

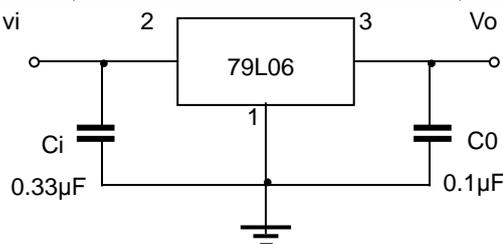

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close possible to the regulators.



Typical Characteristics

