
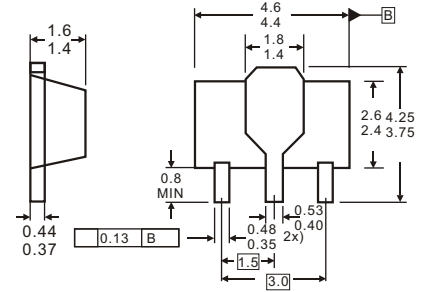


SOT-89

Features

- ◇ Maximum Output current
 I_{OM} : 0.1 A
- ◇ Output voltage
 V_o : -12 V
- ◇ Continuous total dissipation
 P_D : 0.5 W

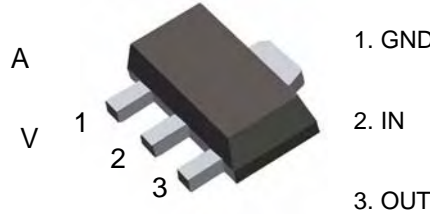

Dimensions in inches and (millimeters)


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V_i	-35	V
Operating Junction Temperature Range	T_{OPR}	0~+125	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS ($V_i=19V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	V_o	25°C	-11.5	-12	-12.5	V	
		-14.5V ≤ V_i ≤ -27V, $I_o=1mA\sim 40mA$	0-125°C	-11.4	-12	-12.6	V
		$I_o=1mA\sim 70mA$		-11.4	-12	-12.6	V
Load Regulation	ΔV_o	$I_o=1mA\sim 100mA$	25°C	24	100	mV	
		$I_o=1mA\sim 40mA$	25°C	15	50	mV	
Line regulation	ΔV_o	-14.5V ≤ V_i ≤ -27V	25°C	50	250	mV	
		-16V ≤ V_i ≤ -27V	25°C	40	200	mV	
Quiescent Current	I_q	25°C			6.5	mA	
Quiescent Current Change	ΔI_q	-16V ≤ V_i ≤ -27V	0-125°C		1.5	mA	
	ΔI_q	1mA ≤ I_o ≤ 40mA	0-125°C		0.1	mA	
Output Noise Voltage	V_N	10Hz ≤ f ≤ 100KHz	25°C	80		uV	
Ripple Rejection	RR	-15V ≤ V_i ≤ -25V, f=120Hz	0-125°C	37	42	dB	
Dropout Voltage	V_d	25°C		1.7		V	

TYPICAL APPLICATION

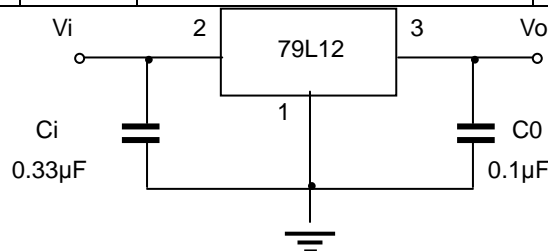

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.



Typical Characteristics

