





### Features

- Output voltage adjustable from 1.3V ~ 37V
- Output current in excess of  
LM317: 1.5A; LM317D: 1A; LM317R: 0.8A
- Internal short circuit protection
- Internal over temperature protection
- Output transistor safe area compensation
- RoHS compliant with Halogen-free





**LM317**  
**TO-220AB**



**LM317D**  
**TO-252**

### Mechanical Data

- Case: TO-220AB, TO-252, SOT-223
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202,



### Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
LM317	TO-220AB	50 pcs / Tube	LM317
LM317D	TO-252	80 pcs / Tube or 2500 pcs / Tape & Reel	LM317
LM317R	SOT-223	4000 pcs / Tape & Reel	LM317

### Maximum Ratings (@ T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Input - Output Differential Voltage	V <sub>IN</sub> - V <sub>OUT</sub>	40	V

### Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation (T <sub>A</sub> = 25°C)	TO-220AB	1.54	W
	TO-252	0.89	W
	SOT-223	0.61	W
Thermal Resistance Junction-to-Air	TO-220AB	65	°C/W
	TO-252	112	°C/W
	SOT-223	165	°C/W
Thermal Resistance Junction-to-Case	TO-220AB	5	°C/W
	TO-252	12	°C/W
	SOT-223	23	°C/W
Operating Virtual Junction Temperature	T <sub>J</sub>	150	°C
Operating Temperature Range	T <sub>OPR</sub>	-40 ~ +125	°C
Storage Temperature Range	T <sub>STG</sub>	-65 ~ +150	°C




### Electrical Characteristics ( $V_{IN}-V_{OUT} = 5V$ , $I_{OUT} = 10mA$ @ $T_A = 25^{\circ}C$ unless otherwise specified)


Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Line Regulation	$\Delta V_{OUT}/V_{OUT}$	$3V \leq V_{IN}-V_{OUT} \leq 40V$	-	-	0.04	%/V
Load Regulation	$\Delta V_{OUT}$	$10mA \leq I_{OUT} \leq 1A$ , $V_{OUT} \leq 5V$	-	-	25	mV
		$10mA \leq I_{OUT} \leq 1A$ , $V_{OUT} \geq 5V$	-	-	0.5	%
Adjustable Pin Current	$I_{ADJ}$		-	-	100	$\mu A$
Adjustable Pin Current Change	$\Delta I_{ADJ}$	$3V \leq V_{IN}-V_{OUT} \leq 40V$ $10mA \leq I_{OUT} \leq 1A$ , $P_D \leq 20W$	-	-	5	$\mu A$
Reference Voltage	$V_{REF}$	$3V \leq V_{IN}-V_{OUT} \leq 40V$ $10mA \leq I_{OUT} \leq 1A$ , $P_D \leq 20W$	1.20	1.25	1.30	V
Temperature Stability		$T_{MIN} \leq T_J \leq T_{MAX}$	-	0.7	-	%/VOUT
Minimum Load Current for Regulation	$I_{L(MIN)}$	$V_{IN}-V_{OUT} = 40V$	-	-	10	mA
Maximum Output Current	$I_{O(MAX)}$	$V_{IN}-V_{OUT} = 40V$ , $P_D \leq 20W$	0.2	-	-	A




### Ratings and Characteristics Curves (@ T<sub>A</sub> = 25°C unless otherwise specified)

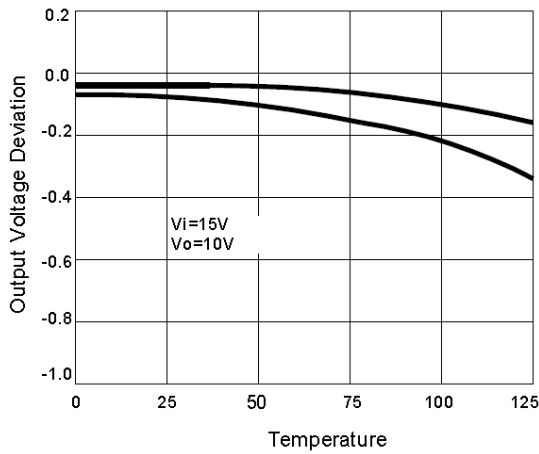


**Fig 1 Load Regulation vs Temperature**

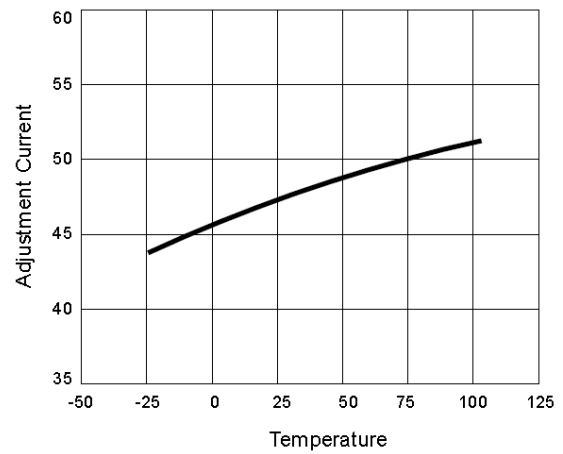


**Fig 2 Adjustment Current vs Temperature**

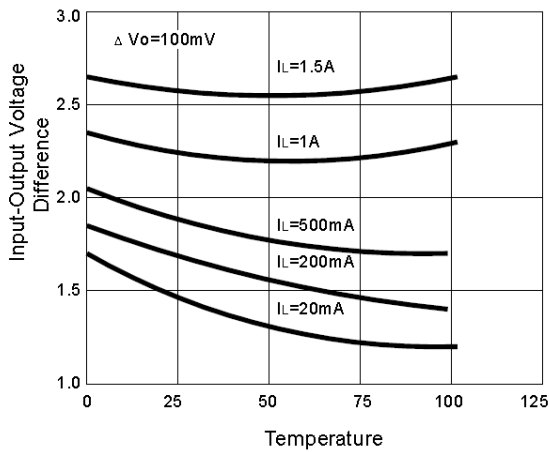


**Fig 3 Dropout Voltage vs Input-Output Voltage Difference**

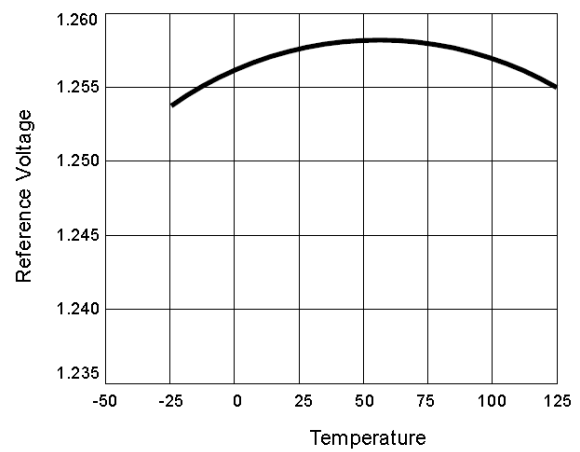

**Fig 4 Reference Voltage vs Temperature**

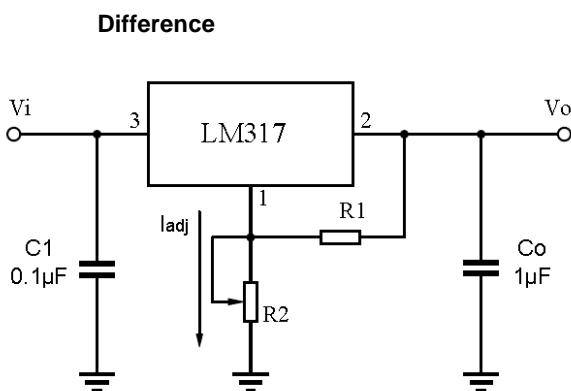

**Fig 5 Programmable voltage regulator**

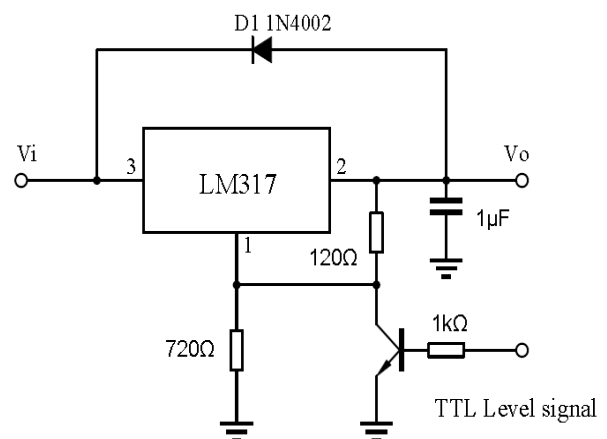

**Fig 6 Regulator with On-off control**

$$V_o = 1.25V \cdot (1 + R2/R1) + I_{adj} \cdot R2$$

C1 is required when regulator is located an appreciated distance from power supply. Co is needed to improve transient response


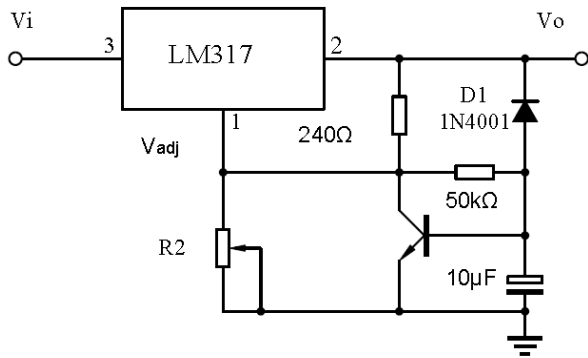


Fig 7 Soft start application

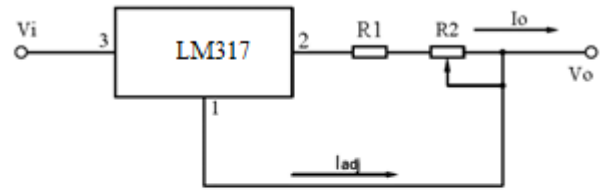

$$I_{\text{omax}} = \left( \frac{V_{\text{ref}}}{R1} \right) + I_{\text{adj}} = \frac{1.25\text{V}}{R1}$$


$$I_{\text{omin}} = \left( \frac{V_{\text{ref}}}{R1+R2} \right) + I_{\text{adj}} = \frac{1.25\text{V}}{R1+R2}$$

$$5\text{mA} < I_o < 100\text{mA}$$


Fig 8 Constant current application




### Package Outline Dimensions (Unit: mm)

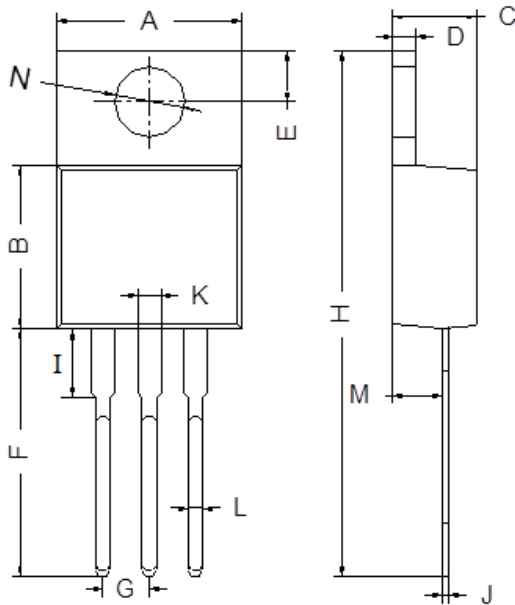

TO-220AB		
Dimension	Min.	Max.
A	9.80	10.30
B	8.70	9.10
C	4.37	4.77
D	1.07	1.47
E	2.64	2.84
F	13.14	13.74
G	2.44	2.64
H	28.03	28.83
I	3.50	4.00
J	0.28	0.48
K	1.22	1.32
L	0.71	0.91
M	2.40	2.60
N	3.76	3.96

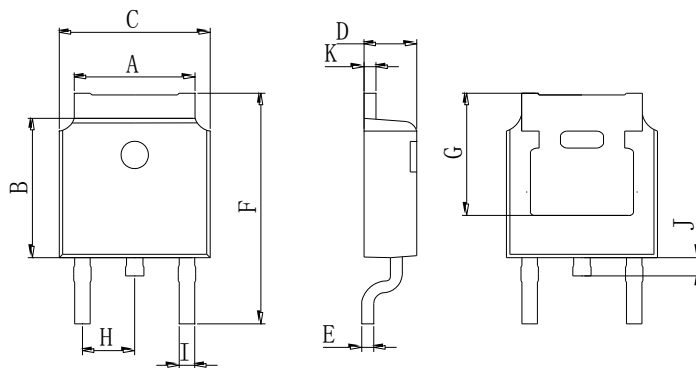


TO-252		
Dimension	Min.	Max.
A	5.05	5.65
B	5.80	6.40
C	6.25	6.85
D	2.20	2.40
E	0.40	0.60
F	9.71	10.31
G	5.05	5.65
H	2.10	2.50
I	0.70	0.90
J	0.50	0.70
K	0.40	0.60

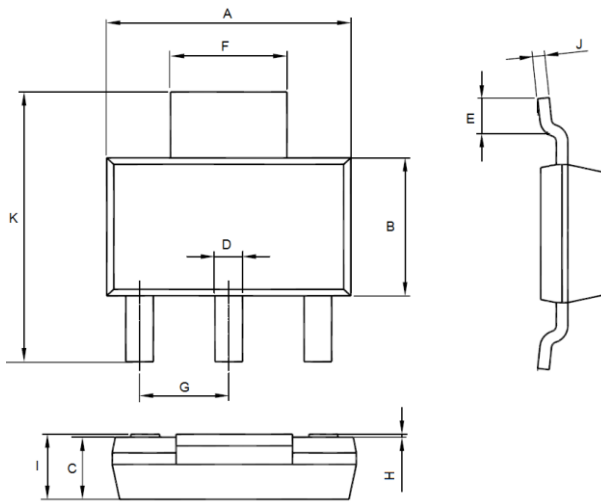

SOT-223		
Dimension	Min.	Max.
A	6.10	6.50
B	3.30	3.70
C	1.50	1.70
D	0.66	0.82
E	0.90	1.15
F	2.90	3.10
G	2.20	2.40
H	0.02	0.10
I	1.52	1.80
J	0.20	0.40
K	6.70	7.30

### Mounting Pad Layout (Unit: mm)

#### TO-252

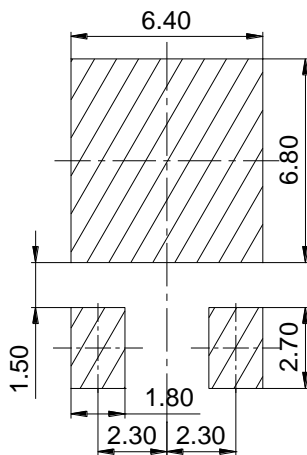

#### SOT-223

