



### FEATURES


- Epitaxial planar die construction
- Complementary NPN types available(DTC)
- Built-in biasing resistors,  $R_1 \neq R_2$
- Also available in lead free version

### APPLICATIONS

- The PNP style digital transistor

### ORDERING INFORMATION

Type No.	Marking	Package Code
DTA113ZCA	E11	SOT-23
DTA114WCA	74	SOT-23
DTA114YCA	54	SOT-23
DTA123JCA	E32	SOT-23
DTA123YCA	52	SOT-23
DTA143XCA	33	SOT-23
DTA143ZCA	E13	SOT-23

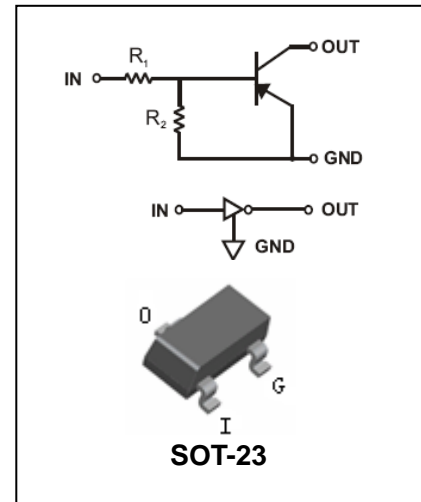

### MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Units
$V_{CC}$	Supply Voltage	-50	V
$V_{IN}$	Input Voltage	DTA113ZCA	+5 to -10
		DTA114WCA	+10 to -30
		DTA114YCA	+6 to -40
		DTA123JCA	+5 to -12
		DTA123YCA	+5 to -12
		DTA143XCA	+7 to -20
		DTA143ZCA	+5 to -30
$I_o$	Output Current	DTA113ZCA	-100
		DTA114WCA	-100
		DTA114YCA	-70
		DTA123JCA	-100
		DTA123YCA	-100
		DTA143XCA	-100
		DTA143ZCA	-100
<b>Symbol</b>	<b>Parameter</b>	<b>Value</b>	<b>Units</b>
$I_c(\text{Max.})$	Output current	ALL	mA



$P_D$	Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient Air	625	$^{\circ}C/W$
$T_j, T_{stg}$	Operating and Storage and Temperature Range	-55 to +150	$^{\circ}C$





### ELECTRICAL CHARACTERISTICS @ $T_a=25^{\circ}C$ unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Input Voltage	DTA113ZCA DTA114WCA DTA114YCA DTA123JCA DTA123YCA DTA143XCA DTA143ZCA	$V_{I(off)}$ $V_{CC}=-5V, I_o=-100\mu A$	-0.3 -0.8 -0.3 -0.5 -0.3 -0.3 -0.5	-	-	V
Input Voltage	DTA113ZCA DTA114WCA DTA114YCA DTA123JCA DTA123YCA DTA143XCA DTA143ZCA	$V_{I(on)}$ $V_o=-0.3V, I_o=-20mA$ $V_o=-0.3V, I_o=-2mA$ $V_o=-0.3V, I_o=-1mA$ $V_o=-0.3V, I_o=-5mA$ $V_o=-0.3V, I_o=-20mA$ $V_o=-0.3V, I_o=-20mA$ $V_o=-0.3V, I_o=-5mA$	-	-	-3.0 -3.0 -1.4 -1.1 -3.0 -2.5 -1.3	V
Output Voltage	DTA123JCA DTA143ZCA DTA114YCA ALL Others	$V_{O(on)}$ $I_o/I_i=-5mA/-0.25mA$  $I_o/I_i=-10mA/-0.5mA$	-	-0.1	-0.3	V
Input Current	DTA113ZCA DTA114WCA DTA114YCA DTA123JCA DTA123YCA DTA143XCA DTA143ZCA	$I_i$ $V_i=-5V$	-	-	-7.2 -0.88 -0.88 -3.6 -3.8 -1.8 -1.8	mA
Output Current		$I_{O(off)}$ $V_{CC}=-50V, V_i=0V$	-	-	-0.5	$\mu A$
DC Current Gain	DTA113ZCA DTA114WCA DTA114YCA DTA123JCA DTA123YCA DTA143XCA DTA143ZCA	$G_i$ $V_o=-5V, I_o=-10mA$	33 24 68 80 33 30 80	-	-	



Input Resistor	DTA113ZCA DTA114WCA DTA114YCA DTA123JCA DTA123YCA DTA143XCA DTA143ZCA	R <sub>1</sub> (R <sub>2</sub> )		0.7 7 7 1.54 1.54 3.29 3.29	1(10) 10(4.7) 10(47) 2.2(47) 2.2(10) 4.7(10) 4.7(47)	1.3 13 13 2.86 2.86 6.11 6.11	kΩ
Input Resistor (R <sub>1</sub> ) Tolerance		ΔR <sub>1</sub>	-	-30		+30	%
Resistance Ratio Tolerance		ΔR <sub>2</sub> /R <sub>1</sub>	-	-20		+20	%
Gain-Bandwidth Product		f <sub>T</sub>	V <sub>CE</sub> =-10V, I <sub>E</sub> =5mA, f=100MHz	-	250	-	MHz

### TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

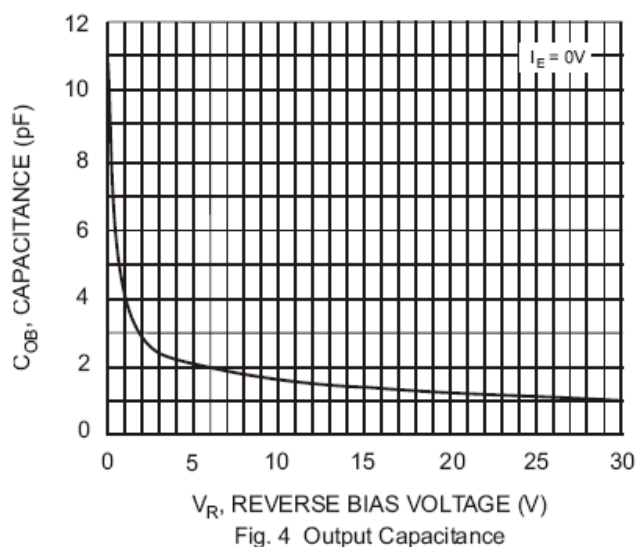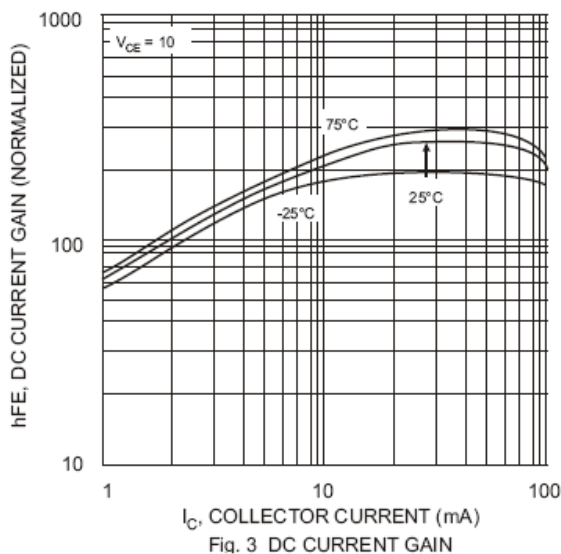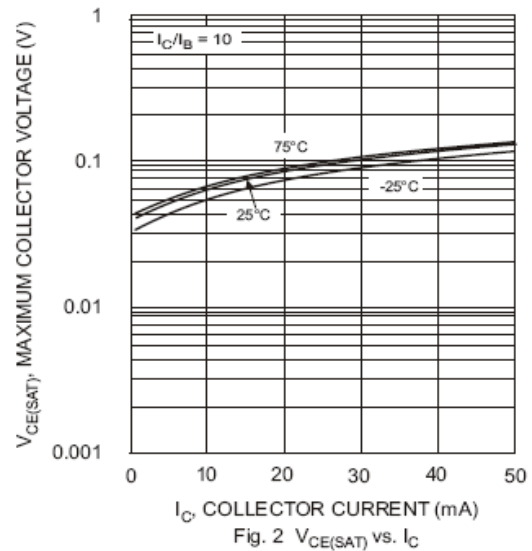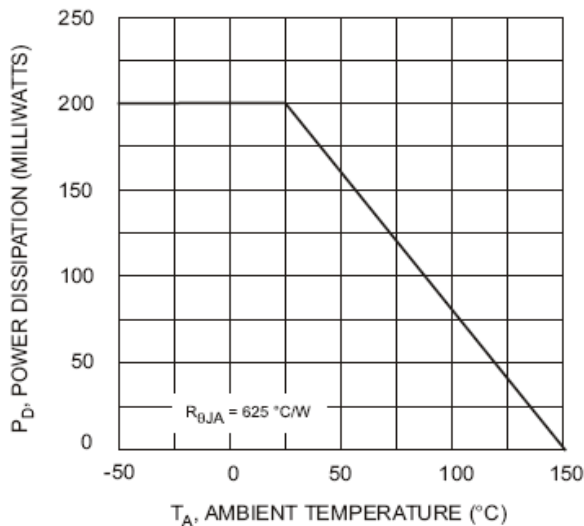

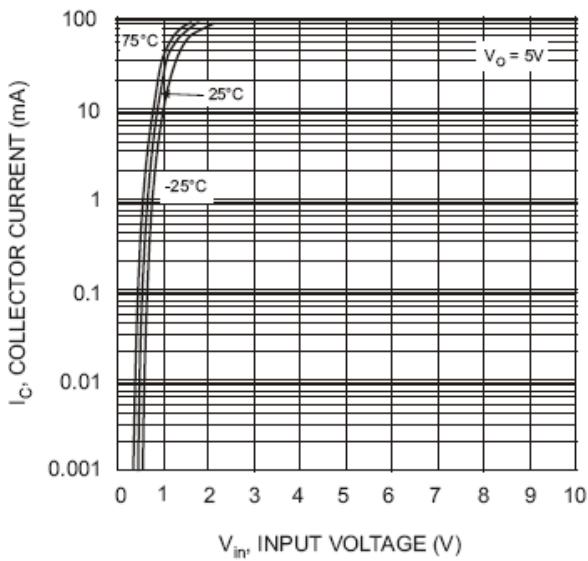


Fig. 5 Collector Current Vs. Input Voltage

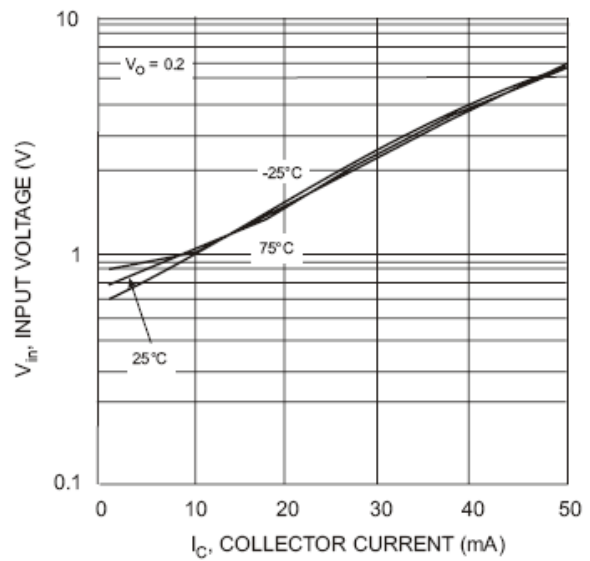



Fig. 6 Input Voltage vs. Collector Current



### PACKAGE OUTLINE


Plastic surface mounted package

SOT-23

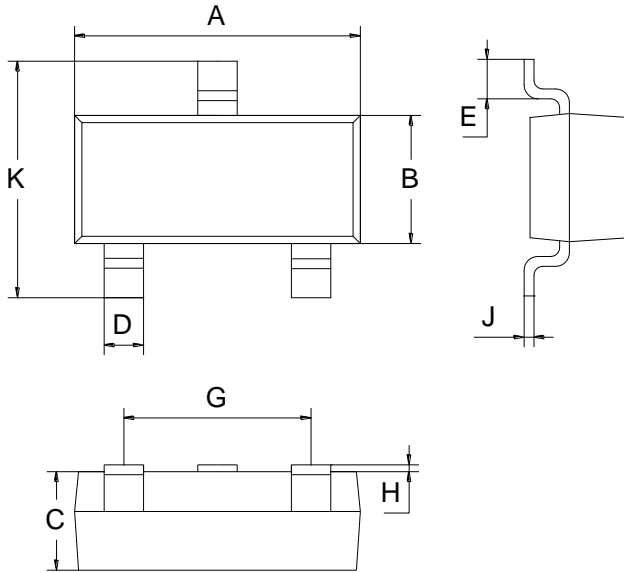

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60
All Dimensions in mm		

### SOLDERING FOOTPRINT

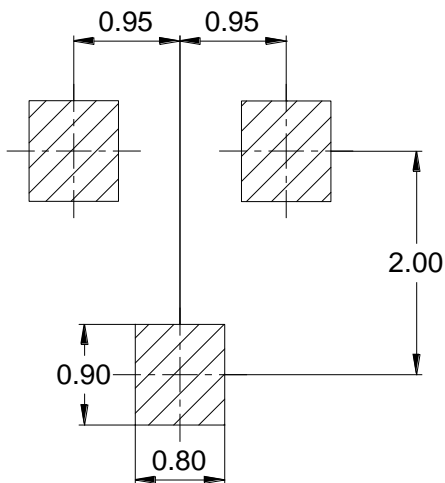

Unit : mm

### PACKAGE INFORMATION

Device	Package	Shipping
DTAXXXCA	SOT-23	3000 pcs / Tape & Reel