




### Features

- Epitaxial planar die construction
- Collector Current: 500mA
- Built-in biasing resistors (R<sub>1</sub>: 10kΩ, R<sub>2</sub>: 10kΩ)

### Mechanical Data

- Case: SOT-23
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

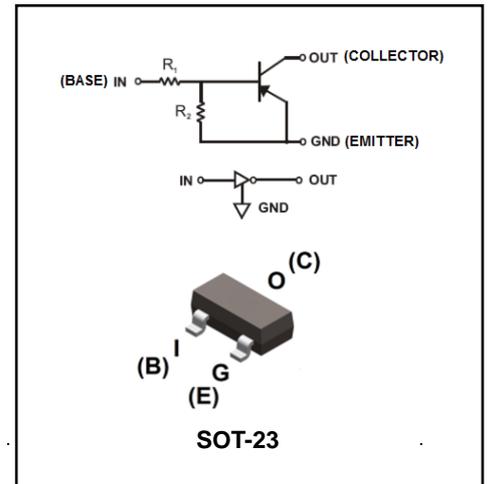

### Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
DTB114ECA	SOT-23	3000 pcs / Tape & Reel	F14

### Maximum Ratings (@ T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	-5	V
Input Voltage	V <sub>I</sub>	-40 to 10	V
Collector Current	I <sub>C</sub>	-500	mA

### Thermal Characteristics


Parameter	Symbol	Value	Unit
Power Dissipation (T <sub>A</sub> = 25°C)	P <sub>D</sub>	200	mW
Thermal Resistance Junction-to-Air	R <sub>θJA</sub>	625	°C/W
Operating Junction Temperature Range	T <sub>J</sub>	-55 ~ +150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 ~ +150	°C




**Electrical Characteristics** (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(OFF)}$	$V_{CC} = -5V, I_o = -100\mu A$	-0.5	-	-	V
Input Voltage	$V_{I(ON)}$	$V_o = -0.3V, I_o = -10mA$	-	-	-3	V
Output Voltage	$V_{O(on)}$	$I_o = -50mA, I_i = -2.5mA$	-	-	-0.3	V
Input Current	$I_i$	$V_i = -5V$	-	-	-0.88	mA
Output Current	$I_{O(off)}$	$V_{CC} = -50V, V_i = 0V$	-	-	-0.5	$\mu A$
DC Current Gain	$G_i$	$V_o = -5V, I_o = -50mA$	56	-	-	-
Input Resistor	$R_1$		7	10	13	k $\Omega$
Resistance ratio	$R_2/R_1$		0.8	1.0	1.2	-
Gain-Bandwidth Product	$f_T$	$V_{CE} = -10V, I_E = -50mA$ $f = 100MHz$	-	200	-	MHz


**Ratings and Characteristic Curves** (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

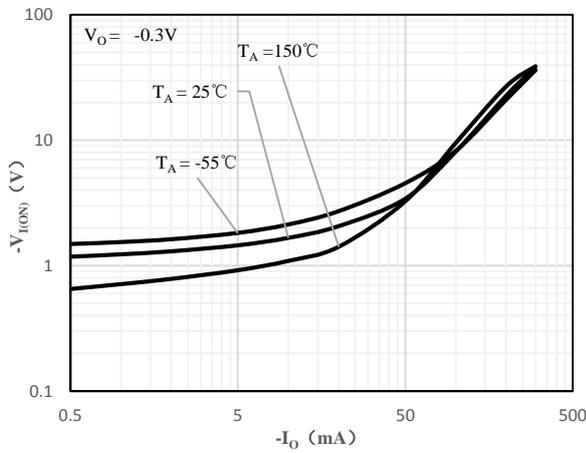


**Fig 1 Input Voltage vs Output Current**

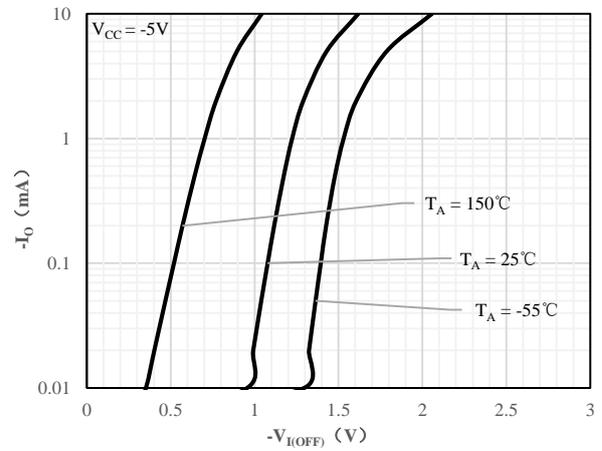


**Fig 2 Output Current vs. Input Voltage**

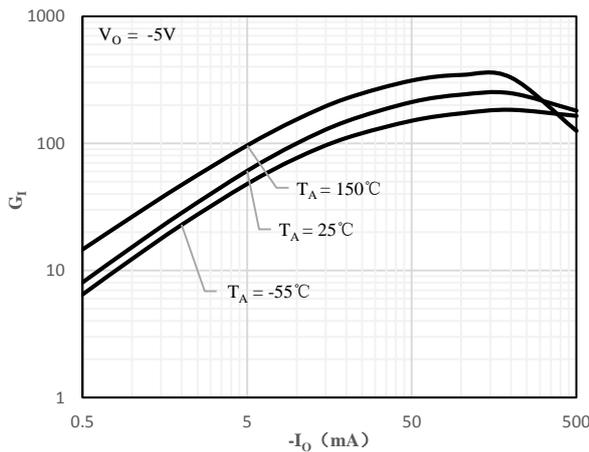


**Fig 3 DC Current Gain vs. Output Current**

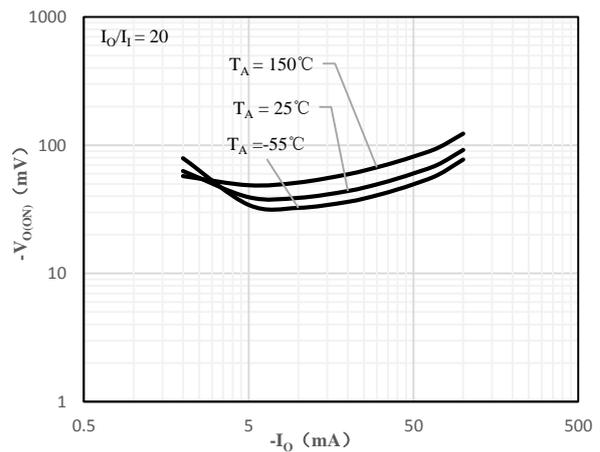

**Fig 4 Output Voltage vs Output Current**

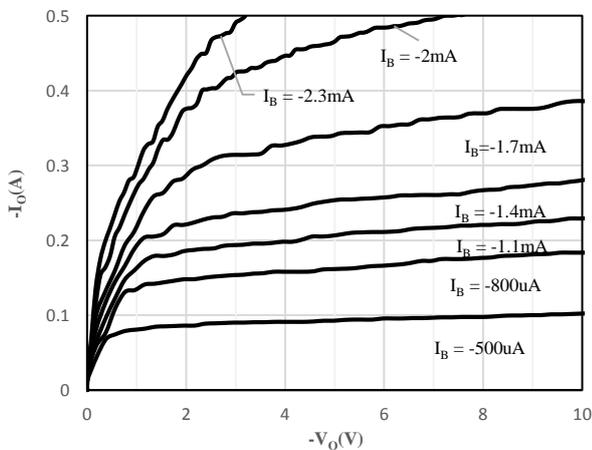


**Fig 5 Output Current vs. Output Voltage**

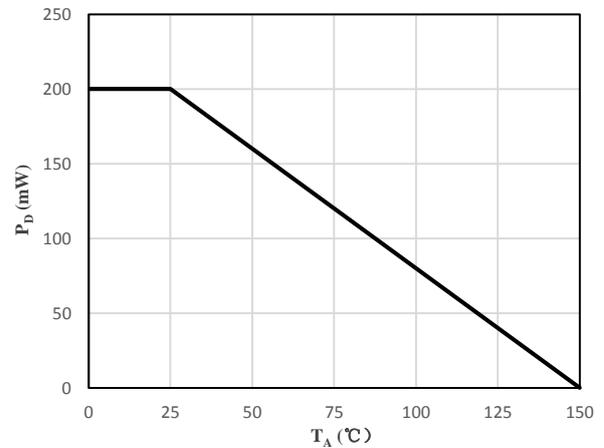

**Fig 6 Power Dissipation vs. Air Temperature**



**Package Outline Dimensions** (Unit: mm)

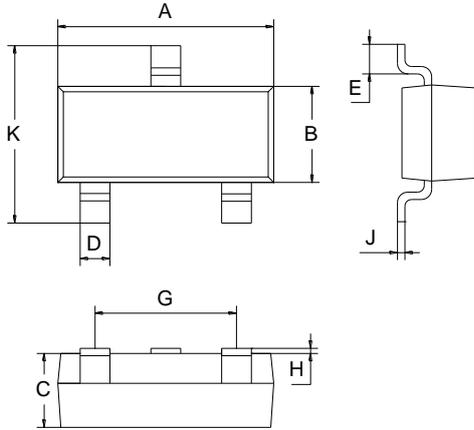

SOT-23		
Dimension	Min.	Max.
A	2.70	3.10
B	1.10	1.50
C	0.9	1.1
D	0.3	0.5
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.05	0.15
K	2.20	2.60

**Package Outline Dimensions** (Unit: mm)

**SOT-23**

