




Features

- Two DTC114Y chip in SOT-563 package
- Transistor elements are independent, eliminating interference
- Mounting cost and area can be cut in half

Mechanical Data

- Case: SOT-563
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

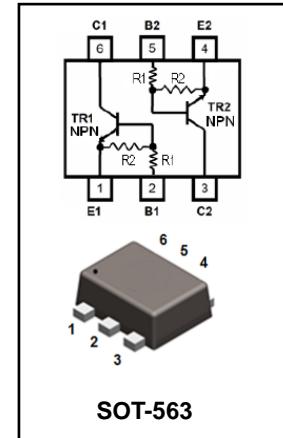

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
EMH9	SOT-563	3000 pcs / Tape & Reel	H9

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value		Unit
		Tr1	Tr2	
V_{CC}	Supply Voltage	50	50	V
V_{IN}	Input Voltage	-6 to +40	-6 to +40	V
I_O	Output Current	70	70	mA
$I_C(\text{MAX.})$	Collector Current *1	100	100	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation *2, 3	P_D	150	mW
Operating Junction Temperature Range	T_J	-55 ~ +150	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C



Electrical Characteristics-TR1 and TR2 (@ $T_A = 25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(OFF)}$	$V_{CC} = 5V, I_O = 100\mu A$	0.3	-	-	V
Input Voltage	$V_{I(ON)}$	$V_O = 0.3V, I_O = 1mA$	-	-	1.4	V
Output Voltage	$V_{O(on)}$	$I_O = 5mA, I_I = 0.25mA$	-	-	0.3	V
Input Current	I_I	$V_I = 5V$	-	-	0.88	mA
Output Current	$I_O(off)$	$V_{CC} = 50V, V_I = 0V$	-	-	0.5	μA
DC Current Gain	G_I	$V_O = 5V, I_O = 5mA$	68	-	-	-
Input Resistor	R_1		7	10	13	k Ω
Resistance ratio	R_2/R_1		3.7	4.7	5.7	-
Gain-Bandwidth Product	f_T	$V_{CE} = 10V, I_E = -5mA$ $f = 100MHz$	-	250	-	MHz

Notes:

1. Characteristics of built-in transistor
2. Each terminal mounted on a reference land
3. 120mW per element must not be exceeded



Ratings and Characteristics Curves-TR1 and TR2 (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

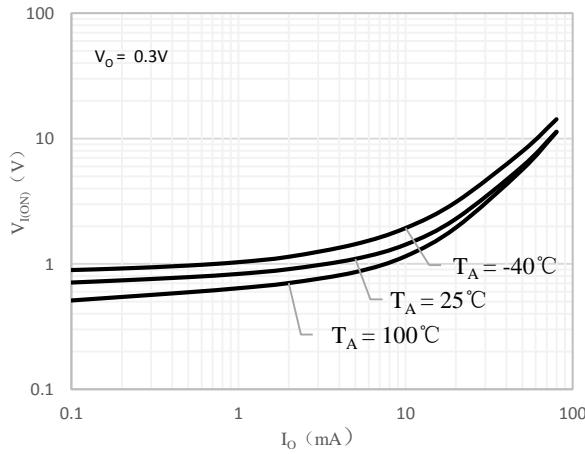


Fig 1 Input Voltage vs Output Current

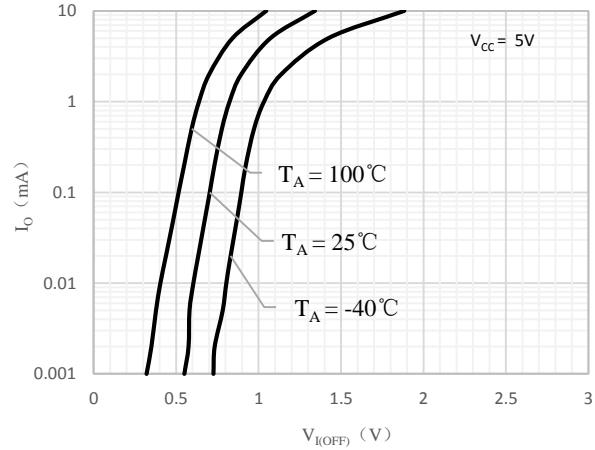


Fig 2 Output Current vs Input Voltage

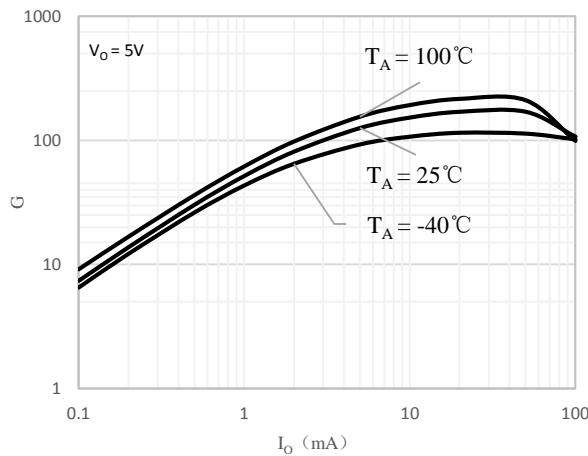


Fig 3 DC Current Gain vs Output Current


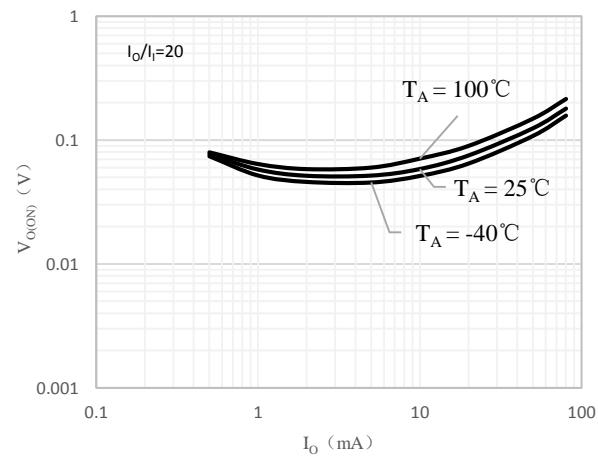


Fig 4 Output Voltage vs Output Current



Package Outline Dimensions (Unit: mm)

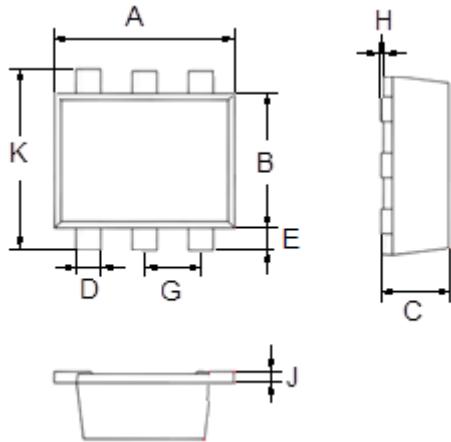

SOT-563		
Dimension	Min.	Max.
A	1.500	1.700
B	1.100	1.300
C	0.525	0.600
D	0.170	0.270
E	0.100	0.300
G	0.450	0.550
H	0.000	0.050
J	0.090	0.160
K	1.500	1.700

Package Outline Dimensions (Unit: mm)

SOT-563

