




### Features

- Two DTA123J transistors are built-in a package
- Built-in biasing resistors (R<sub>1</sub>: 2.2kΩ, R<sub>2</sub>: 47kΩ)
- Transistor elements are independent, eliminating interference
- Reduces component count
- RoHS compliant with Halogen-free

### Mechanical Data

- Case: SOT-363
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

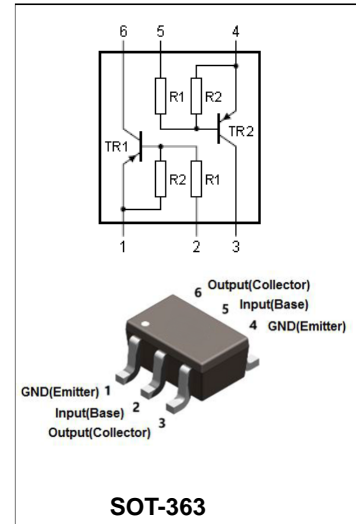

### Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
UMB10N	SOT-363	3000 pcs / Tape & Reel	B10

### Maximum Ratings (@ T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	-50	V
Input Voltage	V <sub>I</sub>	+5 to -12	V
Output Current	I <sub>O</sub>	-100	mA
Collector Current	I <sub>C(Max)</sub>	-100	mA

### Thermal Characteristics


Parameter	Symbol	Value	Unit
Power Dissipation (T <sub>A</sub> = 25°C)	P <sub>D</sub>	150	mW
Thermal Resistance Junction-to-Air	R <sub>θJA</sub>	833	°C/W
Operating Junction Temperature Range	T <sub>J</sub>	-55 ~ +150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 ~ +150	°C




### Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(OFF)}$	$V_{CC} = -5V, I_O = -100\mu A$	-0.5	-	-	V
Input Voltage	$V_{I(ON)}$	$V_O = -0.3V, I_O = -5mA$	-	-	-1.1	V
Output Voltage	$V_{O(on)}$	$I_o = -5mA, I_I = -0.25mA$	-	-	-0.3	V
Input Current	$I_I$	$V_I = -5V$	-	-	-3.6	mA
Output Current	$I_{O(off)}$	$V_{CC} = -50V, V_I = 0V$	-	-	-0.5	$\mu A$
DC Current Gain	$G_I$	$V_O = -5V, I_o = -10mA$	80	-	-	-
Input Resistor	$R_1$		1.54	2.2	2.86	k $\Omega$
Resistance ratio	$R_2/R_1$		17	21	26	-
Gain-Bandwidth Product	$f_T$	$V_{CE} = -10V, I_E = -5mA$ $f = 100MHz$	-	250	-	MHz


## Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

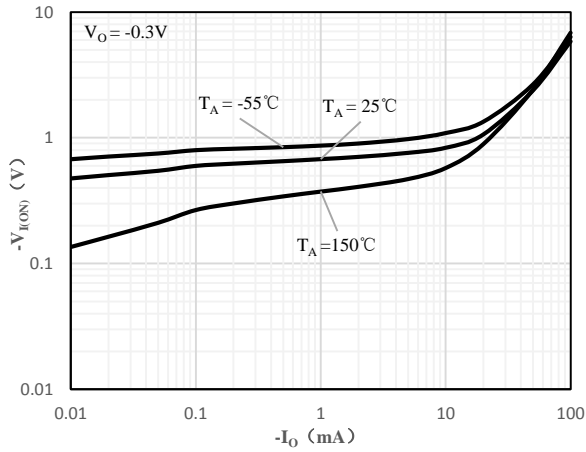


**Fig 1 Input Voltage vs Output Current**

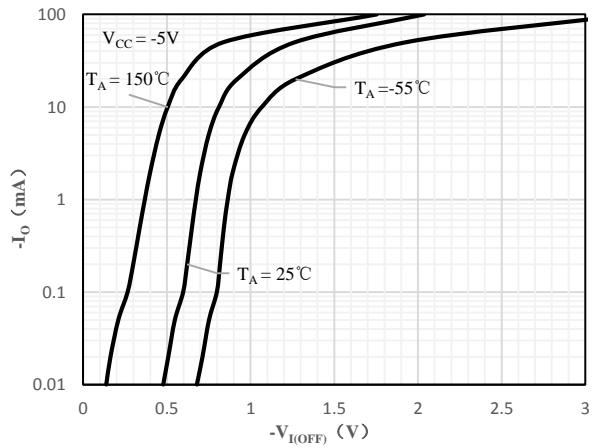

**Fig 2 Output Current vs Input Voltage**

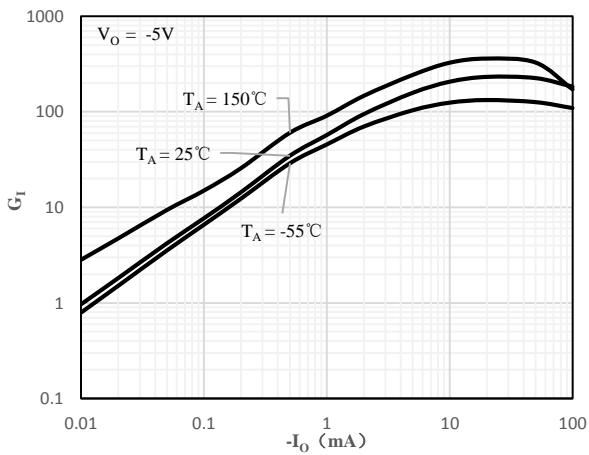


**Fig 3 DC Current Gain vs Output Current**

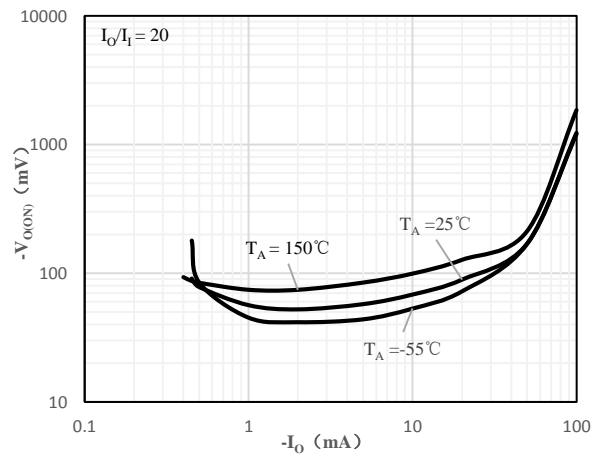

**Fig 4 Output Voltage vs Output Current**



## Package Outline Dimensions (Unit: mm)

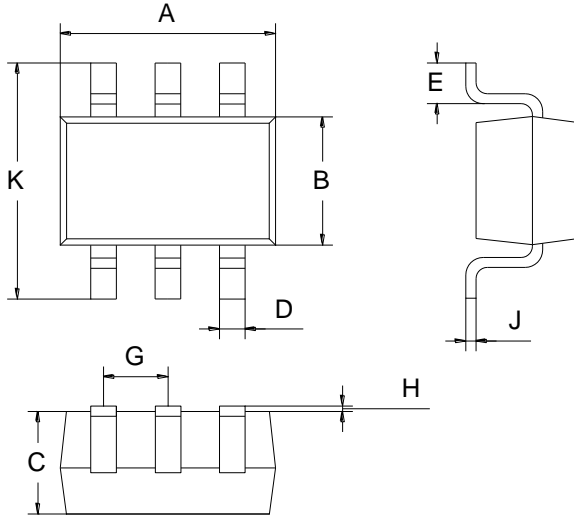

SOT-363		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

## Mounting Pad Layout (Unit: mm)

### SOT-363

