




Features

- Both the DTC124E and DTA124E in SOT-363 package
- Reduces board space
- Reduces component count
- Surface mount package suited for automated assembly

Mechanical Data

- Case: SOT-363
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

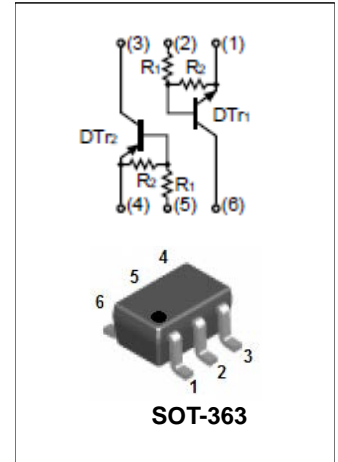

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
UMD2N	SOT-363	3000 pcs / Tape & Reel	TR

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value		Unit
		DT _{r1}	DT _{r2}	
Supply Voltage	V _{CC}	50	-50	V
Input Voltage	V _{IN}	-10 to +40	-40 to +10	V
Output Current	I _O	30	-30	mA
Collector Current	I _{C (Max.)}	100	-100	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	150	mW
Operating Junction Temperature Range	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C



Electrical Characteristics-DT_{r1} (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	V _{I(off)}	V _{CC} = 5V, I _O = 100μA	0.5	-	-	V
	V _{I(on)}	V _O = 0.2V, I _O = 5mA	-	-	3	V
Output Voltage	V _{O(on)}	I _O = 10mA, I _I = 0.5mA	-	-	0.3	V
Input Current	I _I	V _I = 5V	-	-	360	μA
Output Current	I _{O(off)}	V _{CC} = 50V, V _I = 0V	-	-	500	nA
DC Current Gain	G _I	V _O = 5V, I _O = 5mA	56	-	-	-
Input Resistor	R _I		15.4	22	28.6	kΩ
Resistance ratio	R ₂ /R ₁		0.8	1	1.2	-
Gain-Bandwidth Product	f _T	V _{CE} = 10V, I _E = -5mA, f = 100MHz	-	250	-	MHz

Electrical Characteristics-DT_{r2} (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	V _{I(off)}	V _{CC} = -5V, I _O = -100μA	-0.5	-	-	V
	V _{I(on)}	V _O = -0.2V, I _O = -5mA	-	-	-3	V
Output Voltage	V _{O(on)}	I _O = -10mA, I _I = -0.5mA	-	-	-0.3	V
Input Current	I _I	V _I = -5V	-	-	-360	μA
Output Current	I _{O(off)}	V _{CC} = -50V, V _I = 0V	-	-	-500	nA
DC Current Gain	G _I	V _O = -5V, I _O = -5mA	56	-	-	-
Input Resistor	R _I		15.4	22	28.6	kΩ
Resistance ratio	R ₂ /R ₁		0.8	1	1.2	-
Gain-Bandwidth Product	f _T	V _{CE} = -10V, I _E = 5mA, f = 100MHz	-	250	-	MHz



Ratings and Characteristics Curves-DT_{r1} (@ T_A = 25°C unless otherwise specified)

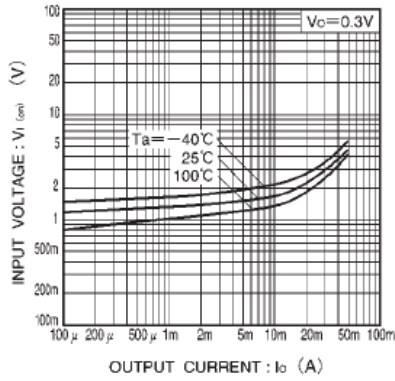


Fig.1 Input voltage vs. output current (ON characteristics)

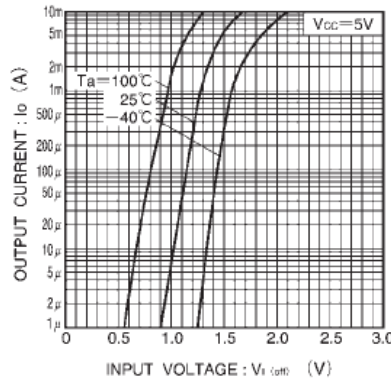


Fig.2 Output current vs. input voltage (OFF characteristics)

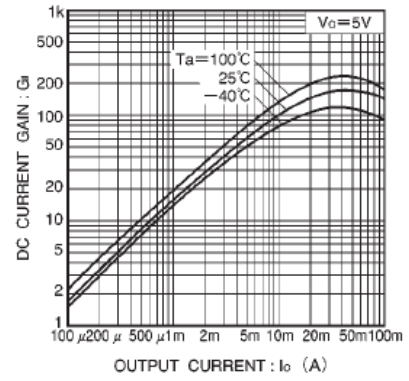


Fig.3 DC current gain vs. output current

Ratings and Characteristics Curves-DT_{r1} (@ T_A = 25°C unless otherwise specified)

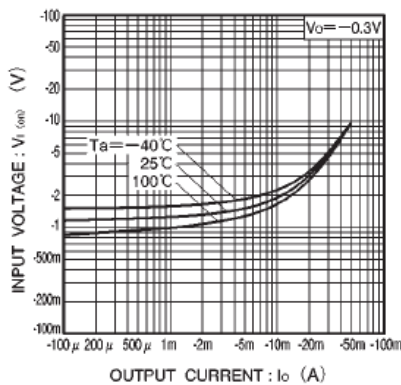


Fig.1 Input voltage vs. output current (ON characteristics)

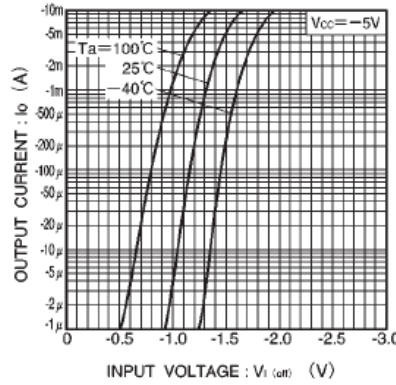


Fig.2 Output current vs. input voltage (OFF characteristics)


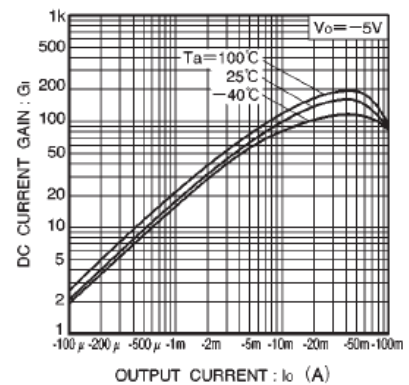


Fig.3 DC current gain vs. output current



Package Outline Dimensions (Unit: mm)

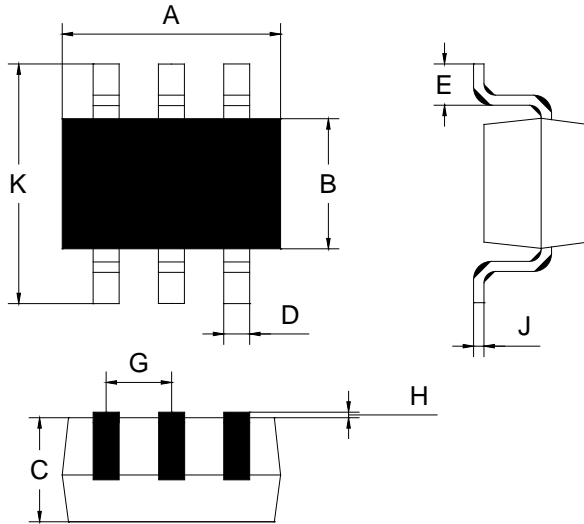

SOT-363		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (Unit: mm)

SOT-363

