





Features

- Epitaxial planar die construction
- Complimentary to BC807-6L
- High collector current
- High current gain
- Low collector-emitter saturation voltage



Mechanical Data

- Case: SOT-23-6L
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

SOT-23-6L

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BC817-16-6L	SOT-23-6L	3000 pcs / Tape & Reel	6A
BC817-25-6L	SOT-23-6L	3000 pcs / Tape & Reel	6B*
BC817-40-6L	SOT-23-6L	3000 pcs / Tape & Reel	6C

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Breakdown Voltage	V _{CBO}	50	V
Collector-Emitter Breakdown Voltage	V _{CEO}	45	V
Emitter-Base Breakdown Voltage	V _{EBO}	5	V
Continuous Collector Current	I _C	0.5	A
Peak Collector Current	I _{CM}	1	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation (Per transistor) ^{*1}	P _D	370	mW
Power Dissipation (Per device) ^{*1}	P _D	600	mW
Thermal Resistance Junction-to-Air ^{*2}	R _{θJA}	197	°C/W
Thermal Resistance Junction-to-Case ^{*2}	R _{θJC}	100	°C/W
Thermal Resistance Junction-to-Lead ^{*2}	R _{θJL}	29	°C/W
Operating junction Temperature	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C



Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C = 100μA, I _E = 0	50	-	-	V
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C = 10mA, I _B = 0	45	-	-	V
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E = 100μA, I _C = 0	5	-	-	V
Collector Cut-off Current	I _{CBO}	V _{CB} = 25V, I _E = 0	-	-	100	nA
Emitter Cut-off Current	I _{EBO}	V _{EB} = 4V, I _C = 0	-	-	100	nA
DC Current Gain	BC817-16-6L	V _{CE} = 1V, I _C = 100mA	100	-	250	-
	BC817-25-6L		160	-	400	-
	BC817-40-6L		250	-	600	-
	BC817-16-6L	V _{CE} = 1V, I _C = 300mA	60	-	-	-
	BC817-25-6L		100	-	-	-
	BC817-40-6L		170	-	-	-
	BC817-40-6L		V _{CE} = 1V, I _C = 500mA	40	-	-
Collector-emitter Saturation Voltage	V _{CE(sat)}	I _C = 500mA, I _B = 50mA	-	-	0.7	V
Base-emitter Saturation Voltage	V _{BE(sat)}	I _C = 500mA, I _B = 50mA	-	-	1.2	V
Transition Frequency	f _T	I _C = 50mA, V _{CE} = 5V f = 100MHz	-	170	-	MHz
Collector Output Capacitance	C _{OBO}	V _{CB} = 10V, I _E = 0, f = 1MHz	-	6	-	pF

Notes:

1. Device mounted on an FR4 Printed-Circuit Board (PCB); single-sided copper; tin plated; mounting pad for collector 1 cm²
2. The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B



Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

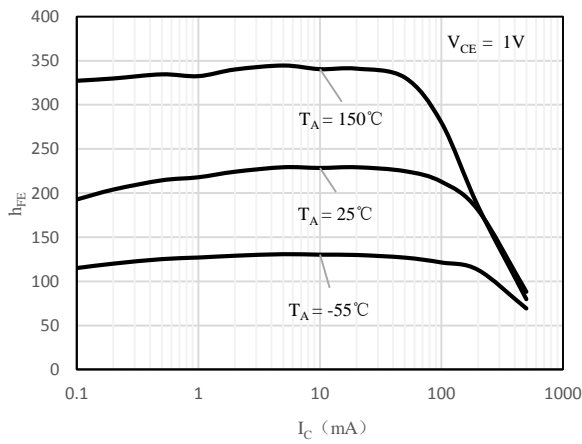


Fig 1 h_{FE} vs. I_C (BC817-16-6L)

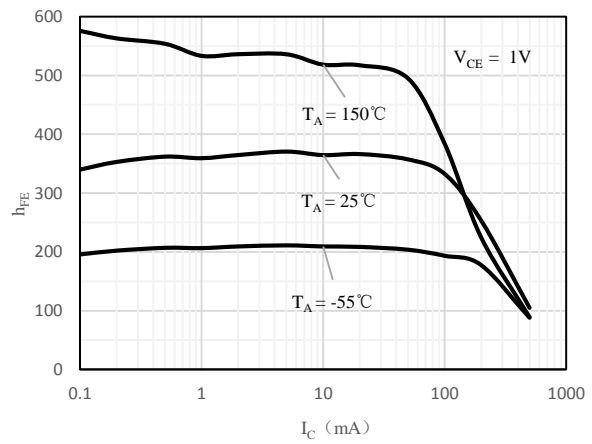


Fig 2 h_{FE} vs. I_C (BC817-25-6L)

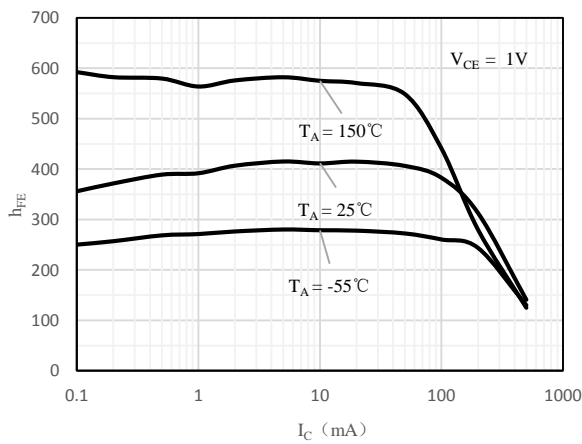


Fig 3 h_{FE} vs. I_C (BC817-40-6L)

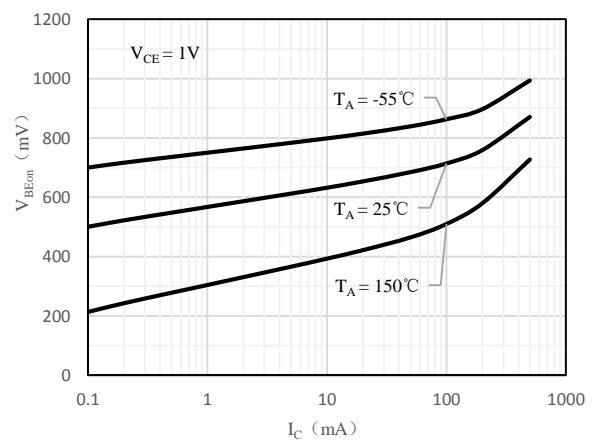


Fig 4 $V_{BE(ON)}$ vs. I_C

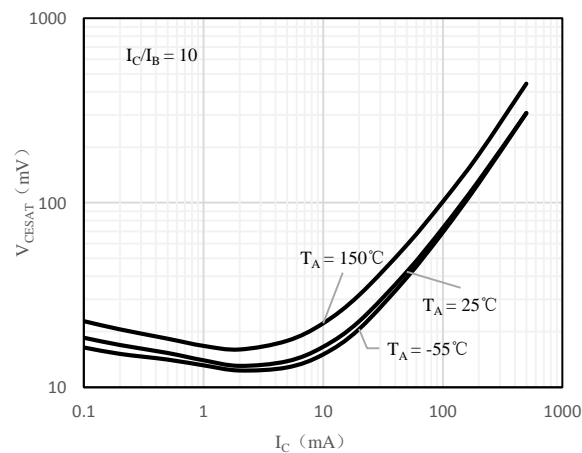


Fig 2 $V_{CE(sat)}$ vs. I_C


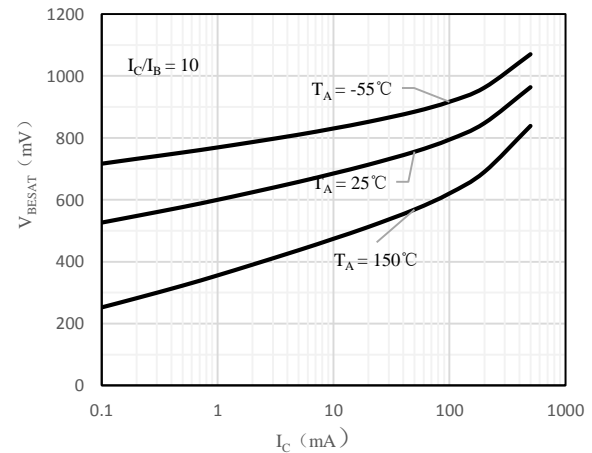


Fig 3 $V_{BE(sat)}$ vs. I_C




Package Outline Dimensions (Unit: mm)

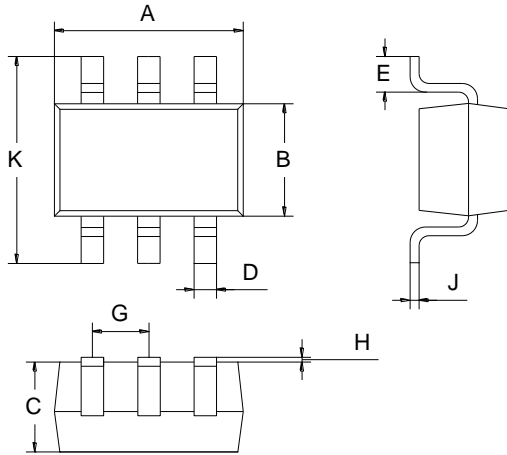

SOT-23-6L		
Dimension	Min.	Max.
A	2.80	3.00
B	1.50	1.70
C	1.00	1.20
D	0.35	0.45
E	0.35	0.55
G	0.90	1.00
H	0.02	0.10
J	0.10	0.20
K	2.60	3.00

Mounting Pad Layout (Unit: mm)

SOT-23-6L

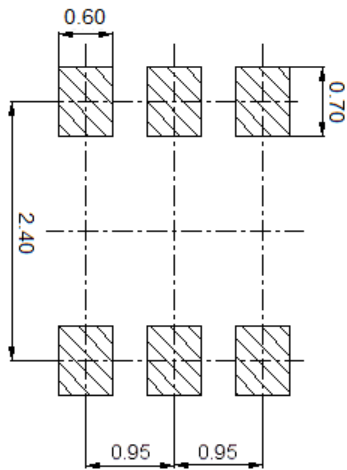

Package	Reel	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)
SOT-23-6L	3000pcs	7inch	45,000pcs	203×203×195	180,000pcs	438×438×220