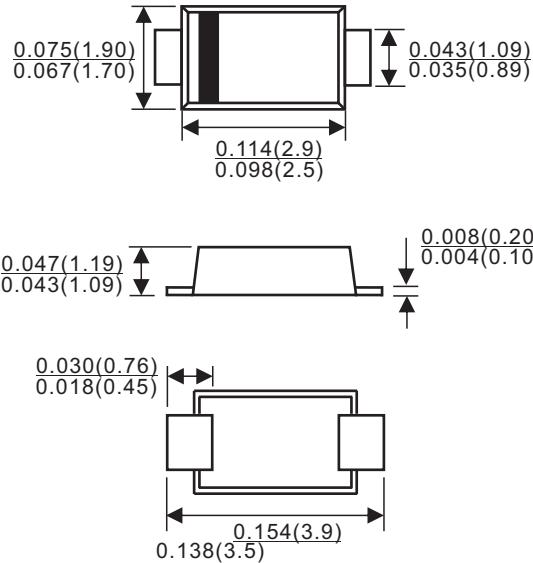



**SOD-123FL**


Dimensions in inches and (millimeters)

## Features

- ✧ Low profile package
- ✧ Ideal for automated placement
- ✧ Ultrafast reverse recovery time
- ✧ Low power losses, high efficiency
- ✧ Low forward voltage drop
- ✧ High surge capability
- ✧ High temperature soldering:  
260°C/10 seconds at terminals
- ✧ Component in accordance to  
RoHS 2002/95/1 and WEEE 2002/96/EC

## Mechanical Data

- ✧ **Case:** JEDEC SOD-123FL molded plastic body over passivated chip
- ✧ **Terminals:** Solder plated, solderable per J-STD-002B and JESD22-B102D
- ✧ **Polarity:** Laser band denotes cathode end
- ✧ **Weight:** 0.017gram

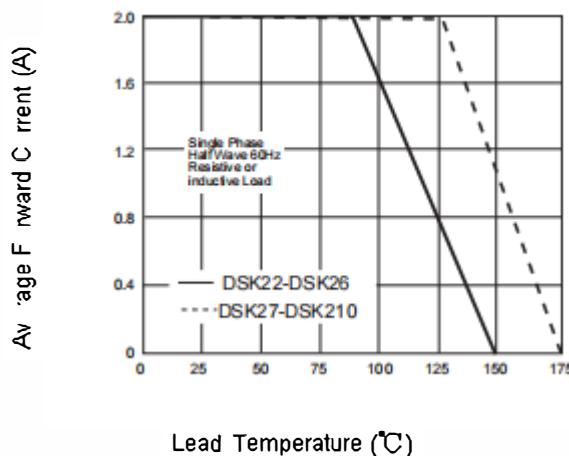
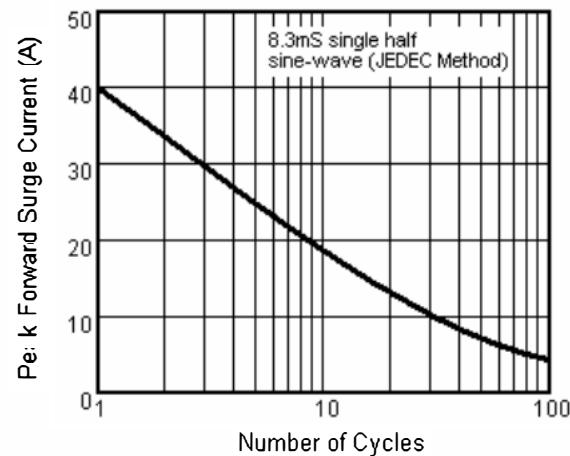
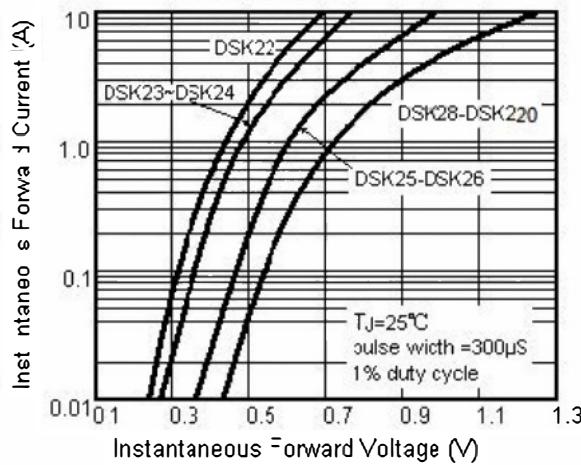
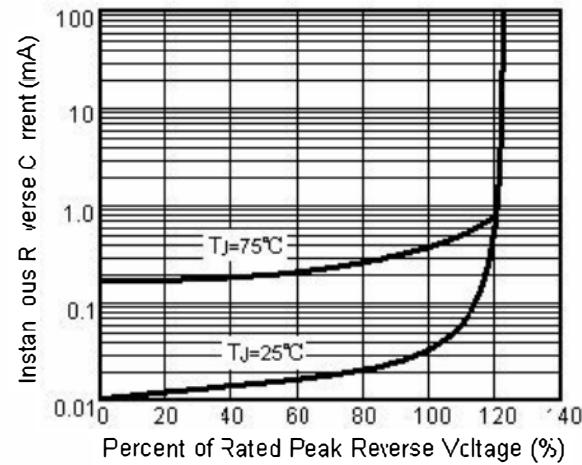
## Maximum Ratings & Thermal Characteristics & Electrical Characteristics

 (T<sub>A</sub> = 25 °C unless otherwise noted)

	SYMBOLS	DSK22	DSK23	DSK24	DSK25	DSK26	DSK27	DSK28	DSK29	DSK210	DSK215	DSK220	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	70	80	90	100	150	200	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	49	56	63	70	83	90	VOLTS
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	70	80	90	100	150	200	VOLTS
Maximum average forward rectified current	I <sub>(AV)</sub>												Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>												Amps
Maximum instantaneous forward voltage at 2.0A	V <sub>F</sub>		0.55		0.70				0.85				Volts
Maximum DC reverse current      T <sub>A</sub> =25°C at rated DC blocking voltage      T <sub>A</sub> =100°C	I <sub>R</sub>					0.5							mA
					10.0			5.0					
Typical junction capacitance (NOTE 1)	C <sub>J</sub>		220					80					pF
Operating junction temperature range	T <sub>J</sub>			-55 to +150					-55 to +175				°C
Storage temperature range	T <sub>STG</sub>			-55 to +150					-55 to +175				°C

Note:1.Measured at 1MHz and applied reverse voltage of 4.0V

D.C.


**Characteristic Curves ( $T_A=25^\circ\text{C}$  unless otherwise noted)**
**Fig.1 Forward Current Derating Curve**

**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current**

**Fig.3 Typical Instantaneous Forward Characteristics**

**Fig.4 Typical Reverse Characteristics**


PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
SOD-123FL	3000/REEL	90000	40X20X22	5.00	4.00