






VOLTAGE RANGE: 20 --- 40 V

CURRENT: 1.0 A

SOD-123FL

Features

- ✧ Metal-Semiconductor junction with guard ring
- ✧ Epitaxial construction
- ✧ Low forward voltage drop, low switching losses
- ✧ High surge capability
- ✧ For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- ✧ The plastic material carries U/L recognition 94V-0

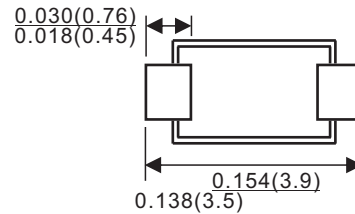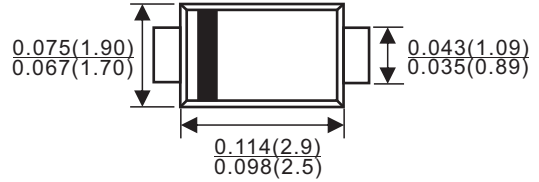

Dimensions in inches and (millimeters)

Mechanical Data

- ✧ Case: JEDEC SOD-123FL, molded plastic
- ✧ Polarity: Color band denotes cathode
- ✧ Weight: 0.0008 ounces, 0.22 grams
- ✧ Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		SX5817	SX5818	SX5819	UNITS
Device marking code		K12	K13	K14	
Maximum recurrent peak reverse voltage	V_{RRM}	20	30	40	V
Maximum RMS voltage	V_{RMS}	14	21	28	V
Maximum DC blocking voltage	V_{DC}	20	30	40	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	1.0			A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=70^\circ C$	I_{FSM}	25.0			A
Maximum instantaneous forward voltage @ 1.0A (Note 1) @ 3.0A	V_F	0.45 0.75	0.55 0.875	0.60 0.90	V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	I_R	1.0 10.0			mA
Typical junction capacitance (Note2)	C_J	110			pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	50			°C/W
Operating junction temperature range	T_J	- 55 ---- + 150			°C
Storage temperature range	T_{STG}	- 55 ---- + 150			°C

NOTE: 1. Pulse test : 300 μ s pulse width, 1% duty cycle.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient



Ratings AND Characteristic Curves

FIG.1 – FORWARD DERATING CURVE

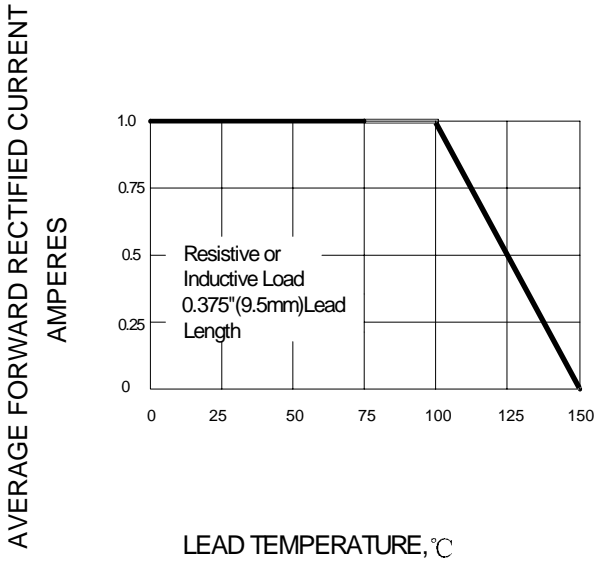


FIG.2 – PEAK FORWARD SURGE CURRENT

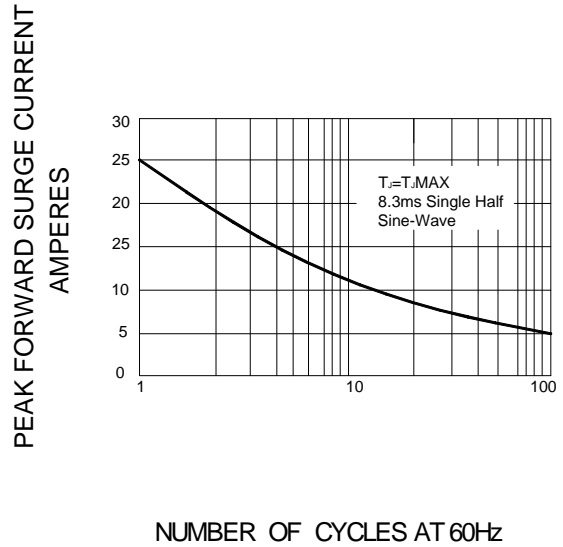


FIG.3 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


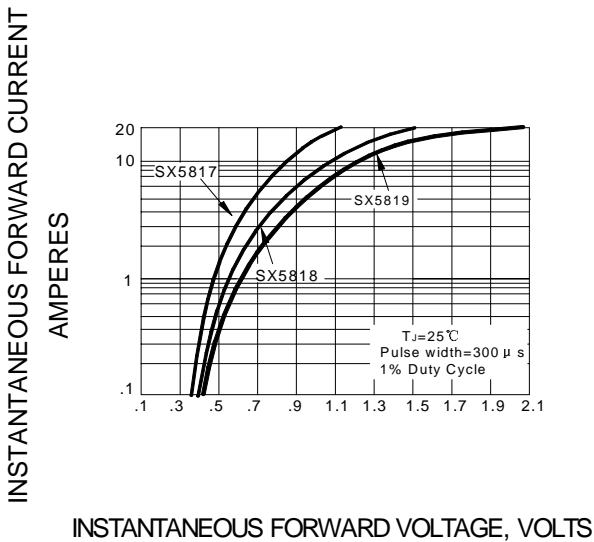


FIG.4 – TYPICAL JUNCTION CAPACITANCE

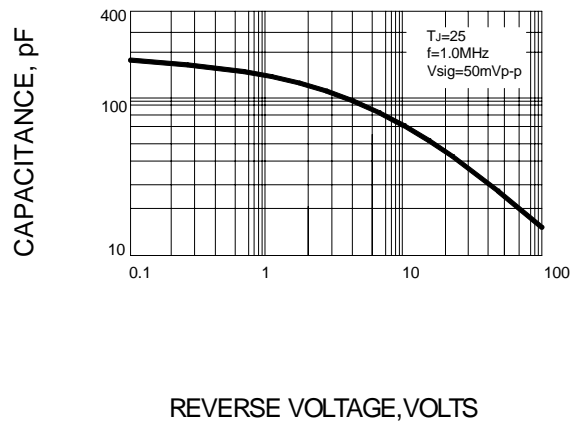

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
SOD-123FL	3000/REEL	90000	40X20X22	5.00	4.00