




- 1. EMITTER
- 2. COLLECTOR
- 3. BASE

### TO-92MOD

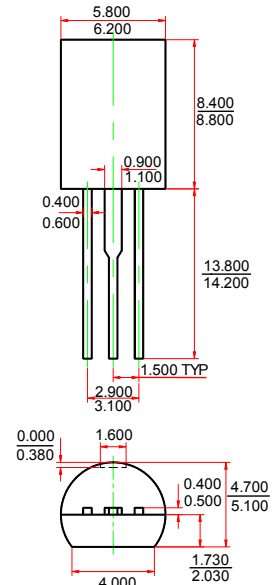

Dimensions in inches and (millimeters)

## Features

- ✧ Low collector to emitter saturation voltage  $V_{CE(sat)}$ .
- ✧ Complementary pair with 2SA0683 and 2SA0684.

### MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	2SC1383	2SC1384	Units
$V_{CBO}$	Collector-Base Voltage	30	60	V
$V_{CEO}$	Collector-Emitter Voltage	25	50	V
$V_{EBO}$	Emitter-Base Voltage	5		V
$I_C$	Collector Current –Continuous	1		A
$P_C$	Collector Power Dissipation	1		W
$T_J$	Junction Temperature	150		$^\circ\text{C}$
$T_{stg}$	Storage Temperature	-55-150		$^\circ\text{C}$










### ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=10\mu\text{A}, I_E=0$	2SC1383	30		V
			2SC1384	60		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=2\text{mA}, I_B=0$	25			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu\text{A}, I_C=0$	5			V
Collector cut-off current	$I_{CBO}$	$V_{CB}=20\text{V}, I_E=0$			0.1	$\mu\text{A}$
DC current gain	$h_{FE(1)}$	$V_{CE}=10\text{V}, I_C=500\text{mA}$	85		340	
	$h_{FE(2)}$	$V_{CE}=5\text{V}, I_C=1\text{A}$	50			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=500\text{mA}, I_B=50\text{mA}$			0.4	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=500\text{mA}, I_B=50\text{mA}$			1.2	V
Transition frequency	$f_T$	$V_{CE}=10\text{V}, I_C=50\text{mA}$		200		MHz

### CLASSIFICATION OF $h_{FE(1)}$


Rank	Q	R	S
Range	85-170	120-240	170-340

### Typical Characteristics

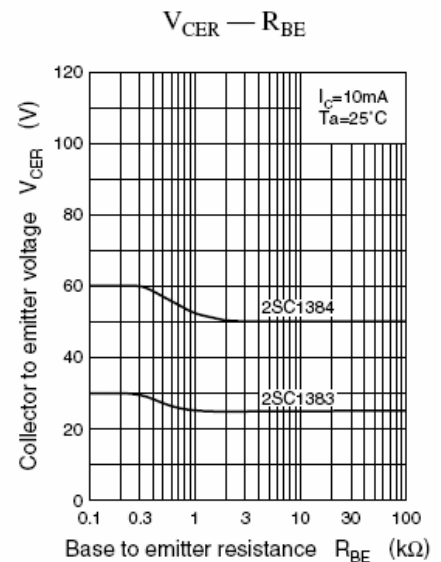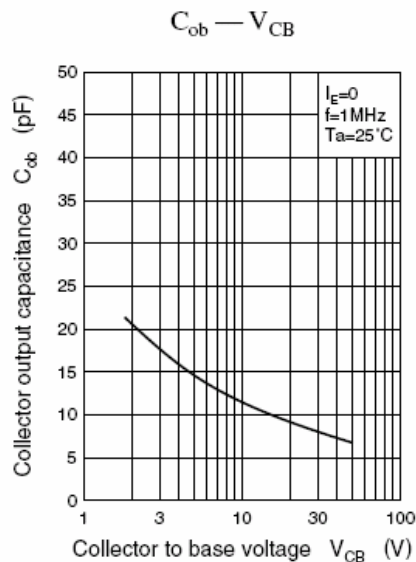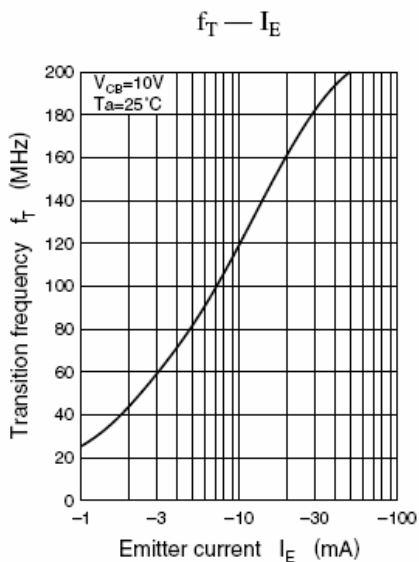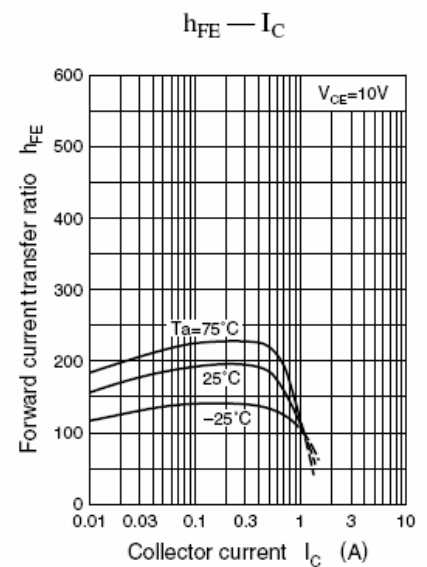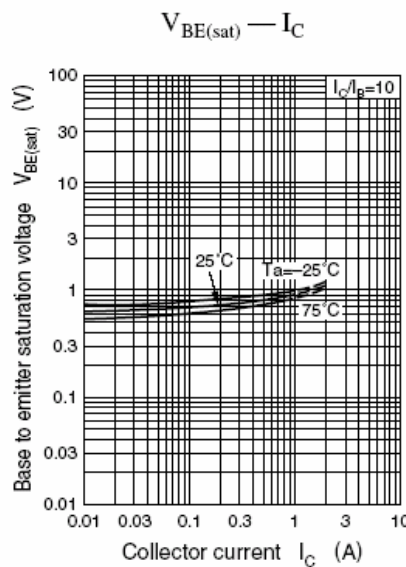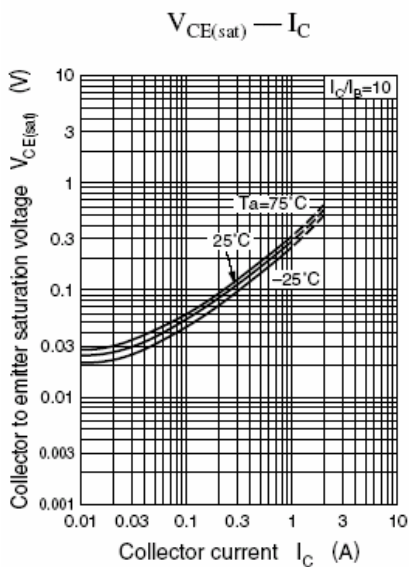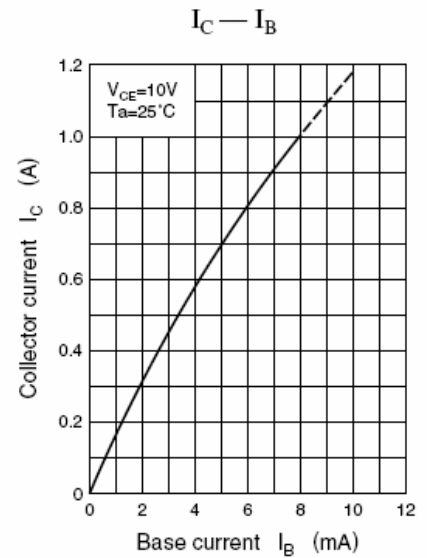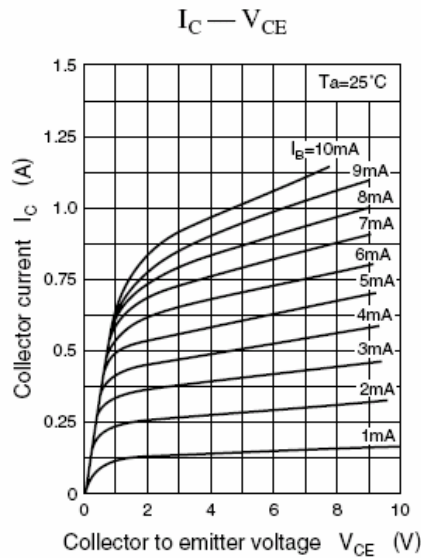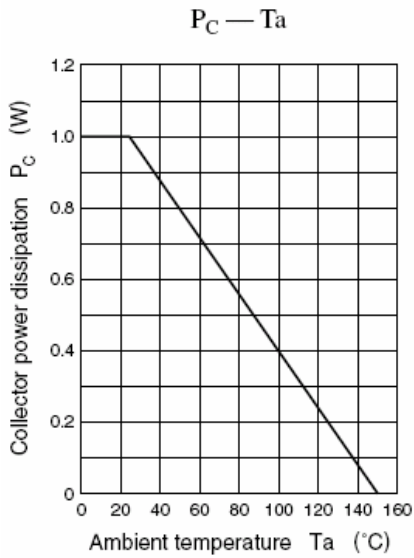




$I_{CEO} - T_a$

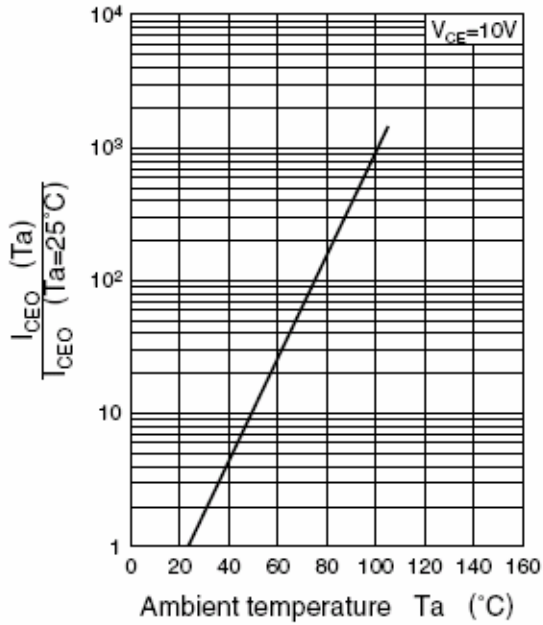

Area of safe operation (ASO)

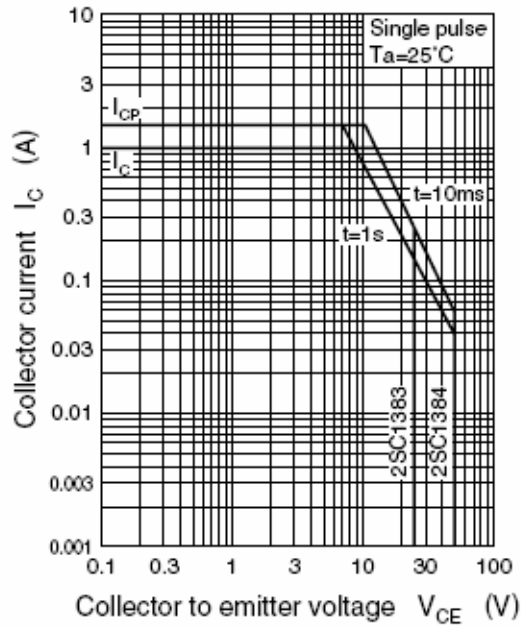

Package	Packing	Quantity	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92MOD	Bulk	500pcs/BP	5000pcs	245×170×100	50,000pcs	525×375×270
TO-92MOD	Tape	2000pcs/TP	2000pcs	333×245×43	20,000pcs	502×403×300