




1. EMITTER
2. BASE
3. COLLECTOR

TO-92

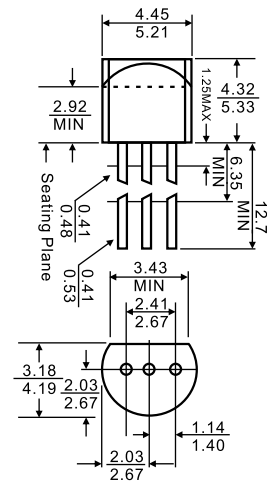

Dimensions in inches and (millimeters)

Features

- ✧ Power dissipation

MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CB0}	Collector-Base Voltage	40	V
V_{CEO}	Collector-Emitter Voltage	25	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	800	mA
P_C	Collector Power Dissipation	625	mW
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55-150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_{amb}=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu\text{A}, I_E=0$	40		V
Collector-emitter breakdown voltage	$V_{(BR)CEO^*}$	$I_C=1\text{mA}, I_B=0$	25		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu\text{A}, I_C=0$	6		V
Collector cut-off current	I_{CBO}	$V_{CB}=35\text{V}, I_E=0$		0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE}=20\text{V}, I_B=0$		0.1	μA
DC current gain	$h_{FE(1)}$	$V_{CE}=1\text{V}, I_C=5\text{mA}$	45		
	$h_{FE(2)}$	$V_{CE}=1\text{V}, I_C=100\text{mA}$	80	400	
	$h_{FE(3)}$	$V_{CE}=1\text{V}, I_C=800\text{mA}$	40		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=800\text{mA}, I_B=80\text{mA}$		0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=800\text{mA}, I_B=80\text{mA}$		1.2	V
Transition frequency	f_T	$V_{CE}=6\text{V}, I_C=20\text{mA}, f=30\text{MHz}$	150		MHz








* Pulse Test : pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.

CLASSIFICATION OF $h_{FE(2)}$

Rank	B	C	D	D3
Range	80-160	120-200	160-300	300-400



Ratings and Characteristics Curve(TA=25°C unless otherwise noted)

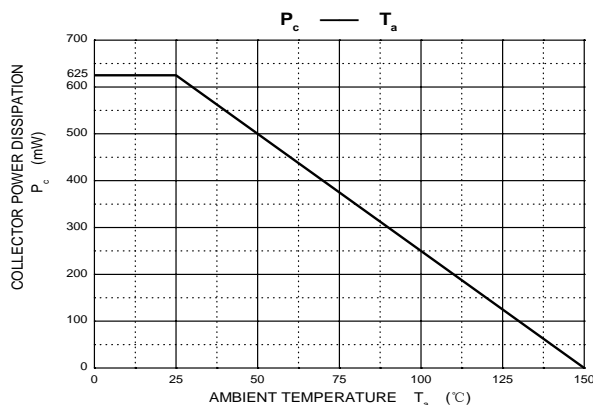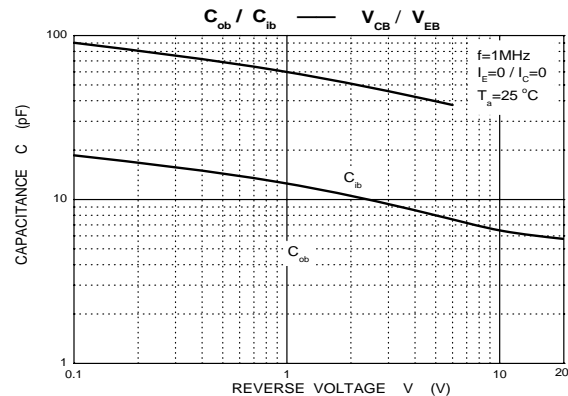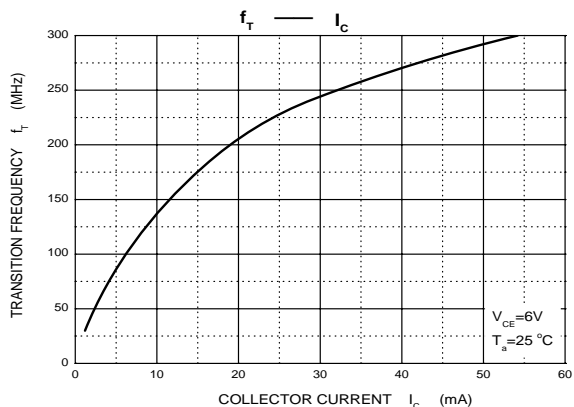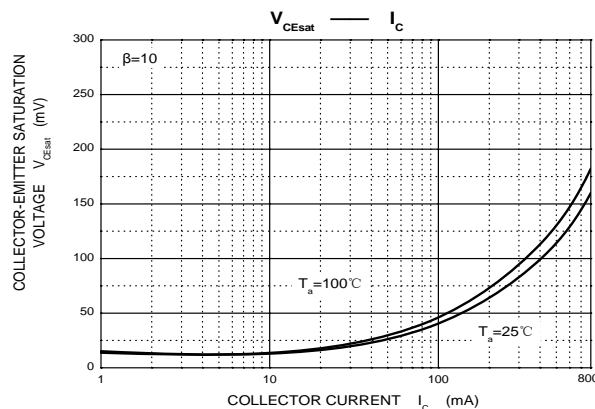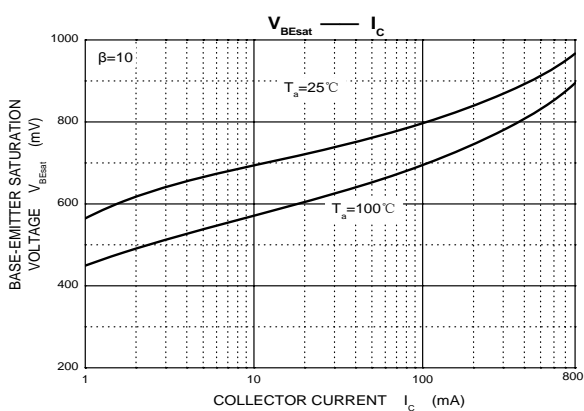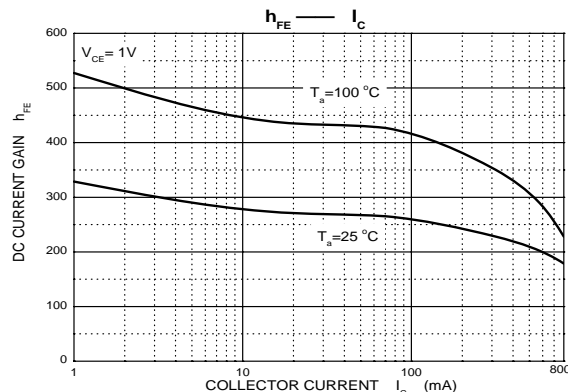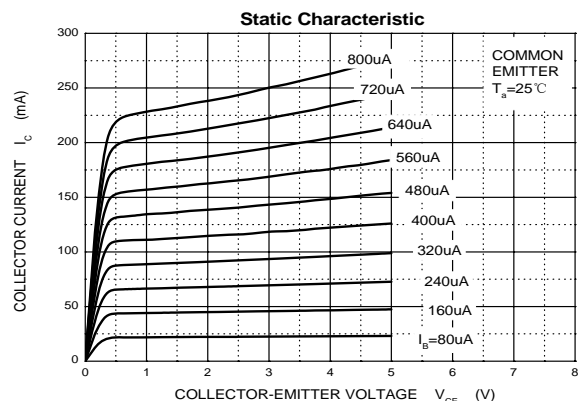

Package	Packing	Quantity	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	Bulk	1000pcs/BP	10,000pcs	245×170×100	100,000pcs	525×375×270
TO-92	Tape	2000pcs/TP	2000pcs	333×162×43	20,000pcs	350×340×250