


1. BASE
2. COLLECTOR
3. EMITTER

### Features

- ✧ Medium Power Linear Switching Applications

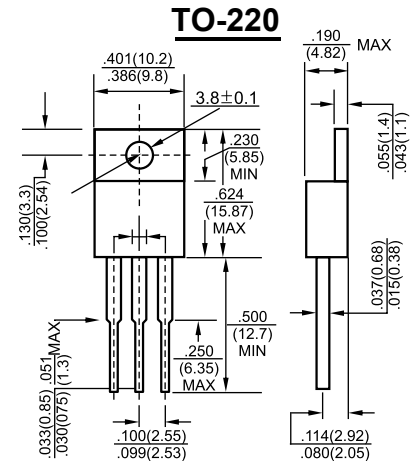

### MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Dimensions in inches and (millimeters)

Symbol	Parameter	TIP41	TIP41A	TIP41B	TIP41C	Units
$V_{CBO}$	Collector-Base Voltage	40	60	80	100	V
$V_{CEO}$	Collector-Emitter Voltage	40	60	80	100	V
$V_{EBO}$	Emitter-Base Voltage	5				V
$I_C$	Collector Current -Continuous	6				A
$P_C$	Collector Power Dissipation	2				W
$T_J$	Junction Temperature	150				$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55to+150				$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT	
Collector-base breakdown voltage	TIP41	$I_C=1\text{mA}, I_E=0$	40		V	
	TIP41A		60			
	TIP41B		80			
	TIP41C		100			
Collector-emitter breakdown voltage	TIP41	$I_C=30\text{mA}, I_B=0$	40		V	
	TIP41A		60			
	TIP41B		80			
	TIP41C		100			
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=1\text{mA}, I_C=0$	5		V	
Collector cut-off current	TIP41	$V_{CB}=40\text{V}, I_E=0$ $V_{CB}=60\text{V}, I_E=0$ $V_{CB}=80\text{V}, I_E=0$ $V_{CB}=100\text{V}, I_E=0$		0.4	mA	
	TIP41A					
	TIP41B					
	TIP41C					
Collector cut-off current	TIP41/41A TIP41B/41C	$I_{CEO}$	$V_{CE}=30\text{V}, I_B=0$ $V_{CE}=60\text{V}, I_B=0$		0.7	mA
Emitter cut-off current	$I_{EBO}$	$V_{EB}=5\text{V}, I_C=0$		1	mA	
DC current gain	$h_{FE(1)}$	$V_{CE}=4\text{V}, I_C=0.3\text{A}$	30			
	$h_{FE(2)}$	$V_{CE}=4\text{V}, I_C=3\text{A}$	15	75		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=6\text{A}, I_B=0.6\text{A}$		1.5	V	
Base-emitter voltage	$V_{BE(on)}$	$V_{CE}=4\text{V}, I_C=6\text{A}$		2	V	
Transition frequency	$f_T$	$V_{CE}=10\text{V}, I_C=0.5\text{A}$ $f=1\text{MHz}$	3		MHz	



### Typical Characteristics

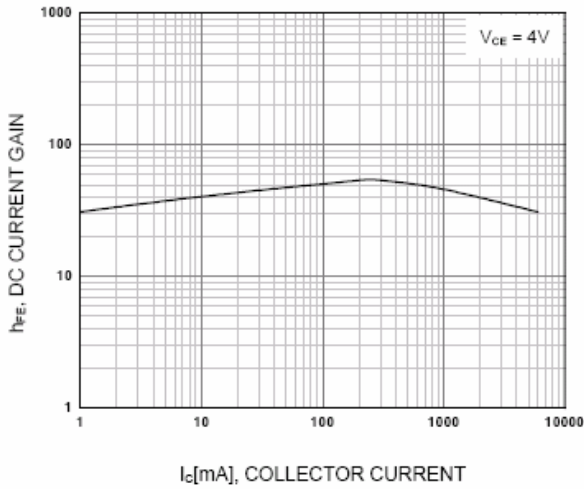


Figure 1. DC current Gain

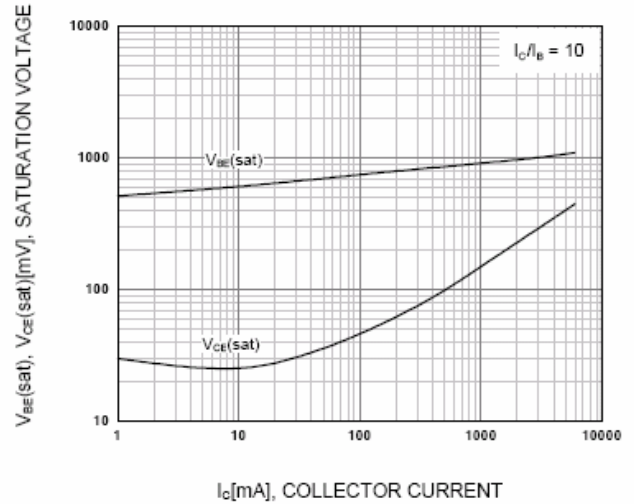


Figure 2. Base-Emitter Saturation Voltage  
Collector-Emitter Saturation Voltage

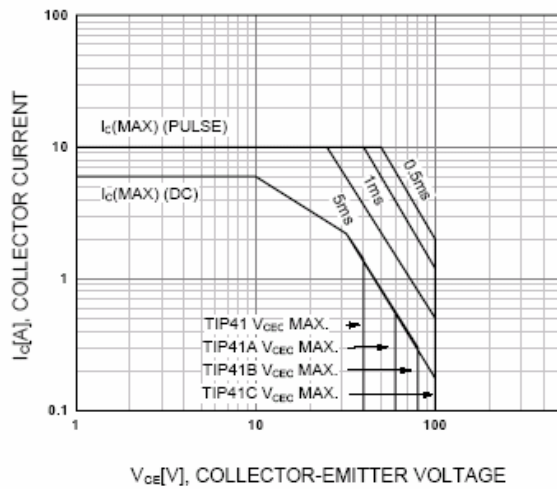


Figure 3. Safe Operating Area

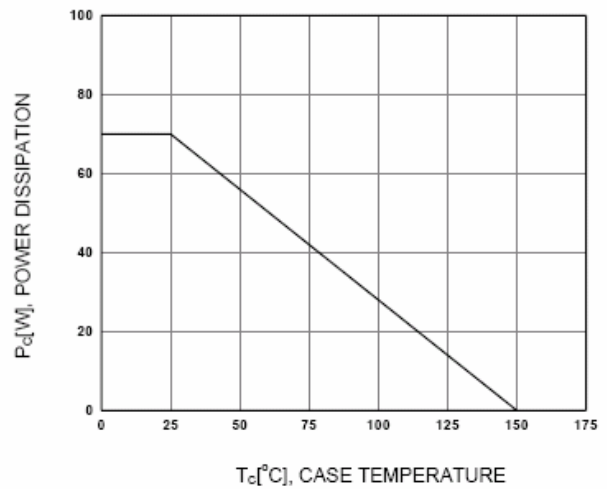


Figure 4. Power Derating

Package	Packing	Box Size L×W×H(mm)	Quantity(pcs/box)	Carton Size L×W×H(mm)	Quantity(pcs/carton)
TO-220	50pcs/Tube	560×150×50	1000	570×290×180	5000