



1. EMITTER
2. COLLECTOR
3. BASE


### Features

- ✧ Complementary to 2SC2236 and 3 Watts output Applications.

### MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise noted)

Symbol	Parameter	Value	Units
V <sub>CB0</sub>	Collector-Base Voltage	-30	V
V <sub>CE0</sub>	Collector-Emitter Voltage	-30	V
V <sub>EB0</sub>	Emitter-Base Voltage	-5	V
I <sub>c</sub>	Collector Current -Continuous	-1.5	A
P <sub>c</sub>	Collector Power Dissipation	0.9	W
T <sub>J</sub>	Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature	-55-150	°C

### TO-92MOD

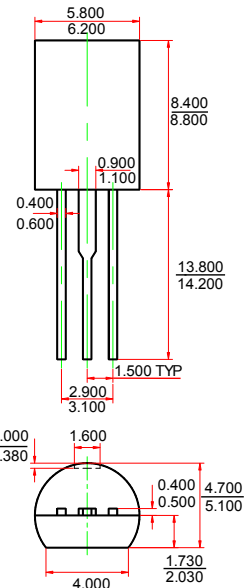

Dimensions in inches and (millimeters)







### ELECTRICAL CHARACTERISTICS (T<sub>amb</sub>=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	V(BR) <sub>CB0</sub>	I <sub>C</sub> = -1mA, I <sub>E</sub> =0	-30			V
Collector-emitter breakdown voltage	V(BR) <sub>CE0</sub>	I <sub>C</sub> = -10mA, I <sub>B</sub> =0	-30			V
Emitter-base breakdown voltage	V(BR) <sub>EBO</sub>	I <sub>E</sub> = -1mA, I <sub>C</sub> =0	-5			V
Collector cut-off current	I <sub>CB0</sub>	V <sub>CB</sub> = -30V, I <sub>E</sub> =0			-0.1	μA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = -5V, I <sub>C</sub> =0			-0.1	μA
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> =-2V, I <sub>C</sub> = -500mA	100		320	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = -1.5 A, I <sub>B</sub> = -0.03A			-2	V
Base-emitter voltage	V <sub>BE</sub>	I <sub>C</sub> = -500mA, V <sub>CE</sub> =-2V			-1	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = -2V, I <sub>C</sub> =-500mA		120		MHz
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> =-10V, I <sub>E</sub> =0, f=1MHz			30	pF

### CLASSIFICATION OF h<sub>FE</sub>

Rank	O	Y
Range	100-200	160-320

### Typical Characteristics

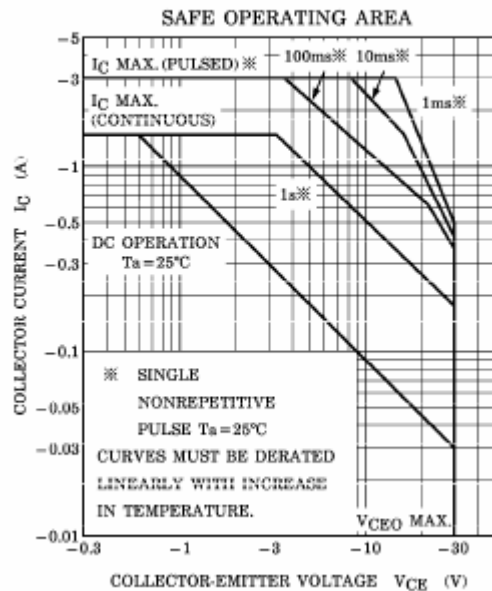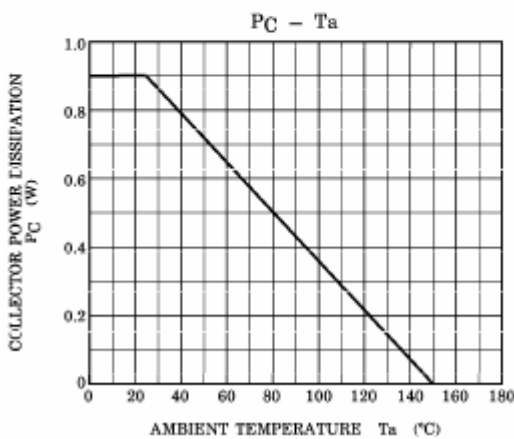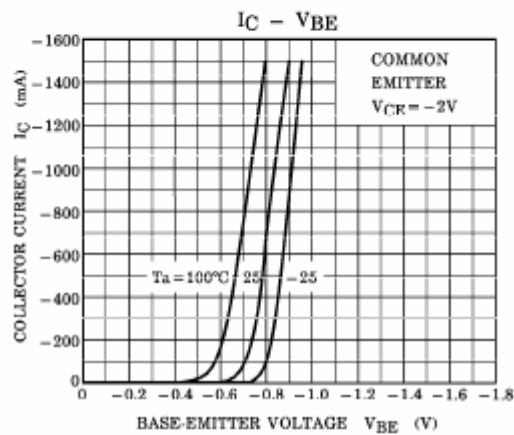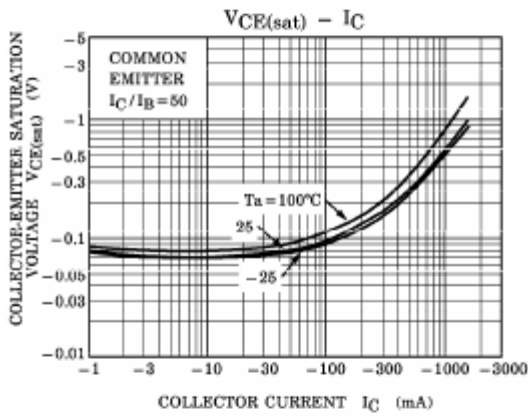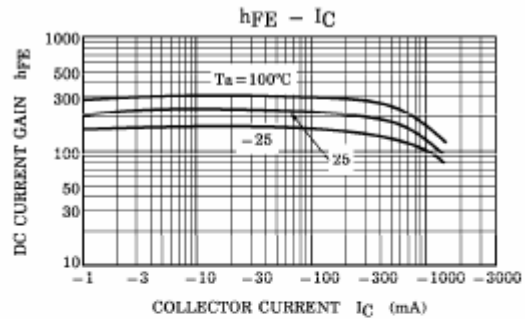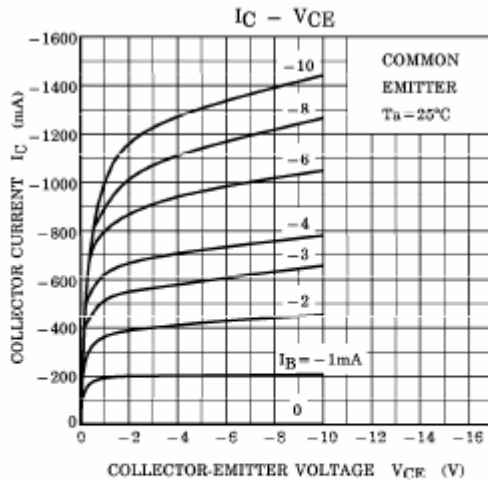

Package	Packing	Quantity	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92MOD	Bulk	500pcs/BP	5000pcs	245×170×100	50,000pcs	525×375×270
TO-92MOD	Tape	2000pcs/TP	2000pcs	333×245×43	20,000pcs	502×403×300