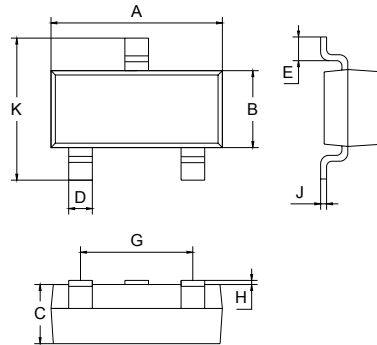


### FEATURES

- Epitaxial planar die construction.
- Ideal for medium power amplification and switching.

### APPLICATIONS

- This device is designed as a general purpose amplifier and switching.



SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	1.0 Typical	
D	0.4 Typical	
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.1 Typical	
K	2.20	2.60
All Dimensions in mm		

### ORDERING INFORMATION

Type No.	Marking	Package Code
MMBT2907	M2B	SOT-23

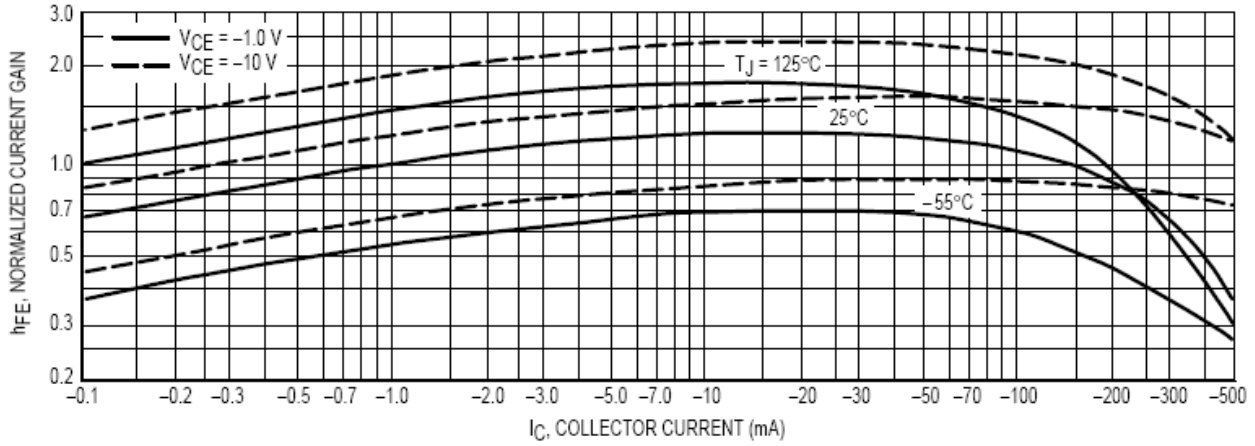
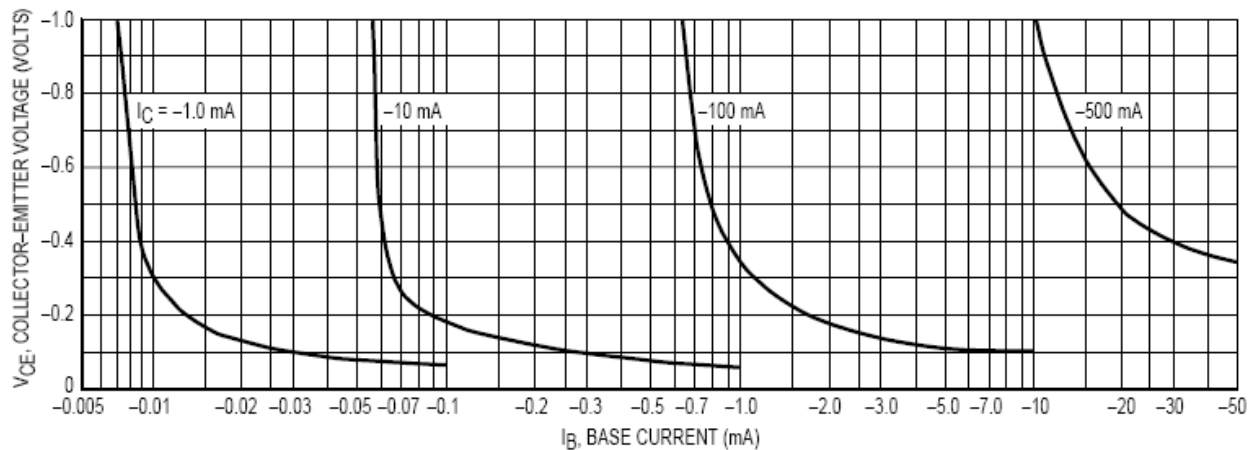
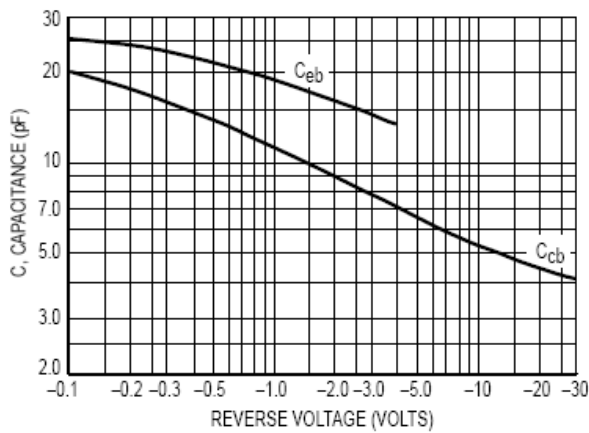
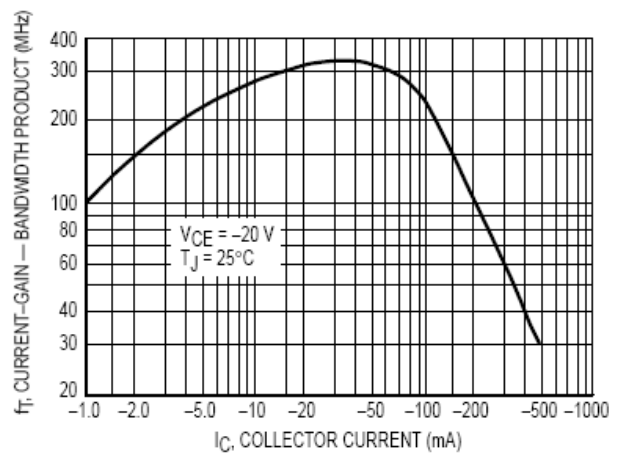
### MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Base Voltage	-60	V
$V_{CEO}$	Collector-Emitter Voltage	-40	V
$V_{EBO}$	Emitter-Base Voltage	-5	V
$I_C$	Collector Current -Continuous	-600	mA
$P_D$	Total Device Dissipation	350	mW
$R_{\theta JA}$	Thermal resistance, Junction to ambient	357	°C/W
$T_j, T_{stg}$	Junction and Storage Temperature	-55 to +150	°C



**ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=-10\mu A, I_E=0$	-60			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=-10mA, I_B=0$	-40			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-10\mu A, I_C=0$	-5			V
Collector cut-off current	$I_{CBO}$	$V_{CB}=-50V, I_E=0$			-0.02	$\mu A$
Collector cut-off current	$I_{CEX}$	$V_{CE}=-30V, V_{BE}=0.5V$			-0.05	$\mu A$
DC current gain	$h_{FE}$	$V_{CE}=-10V, I_C=-150mA$	100		300	
		$V_{CE}=-10V, I_C=-0.1mA$	35			
		$V_{CE}=-10V, I_C=-1mA$	50			
		$V_{CE}=-10V, I_C=-10mA$	75			
		$V_{CE}=-10V, I_C=-500mA$	30			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=-150mA, I_B=-15mA$ $I_C=-500mA, I_B=-50mA$			-0.4 -1.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=-150mA, I_B=-15mA$ $I_C=-500mA, I_B=-50mA$			-1.3 -2.6	V
Output capacitance	$C_{ob}$	$V_{CB}=-10V, f=1.0MHz$			8.0	pF
Input capacitance	$C_{ib}$	$V_{EB}=-2V, f=1.0MHz$			30	pF
Transition frequency	$f_T$	$V_{CE}=-20V, I_C=-50mA$ $f=100MHz$	200			MHz
Turn-on time	$t_{on}$	$V_{CE}=-30V, I_C=-150mA,$ $I_{B1}=-15mA$			45	ns
Delay time	$t_d$				10	ns
Rise time	$t_r$				40	ns
Turn-off time	$t_{off}$	$V_{CE}=-6V, I_C=-150mA$ $I_{B1}=I_{B2}=-15mA$			100	ns
Storage time	$t_s$				80	ns
Fall time	$t_f$				30	ns


**TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

**Figure 1. DC Current Gain**

**Figure 2. Collector Saturation Region**

**Figure 3. Capacitances**

**Figure 4. Current-Gain — Bandwidth Product**

Package	Reel	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)
SOT-23	3000pcs	7inch	45,000pcs	203×203×195	180,000pcs	438×438×220