




FEATURES

- Rating to 1000V PRV
- Surge overload rating to 120 Amperes peak
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Lead solderable per MIL-STD-202 method 208



GBS		
Dim	Min	Max
A	13.65	14.15
B	9.80	10.20
C	2.95	3.25
E	0.35	0.65
F	11.70	12.30
I	0.65	0.95
J	0.90	1.20
K	3.60	4.00
P	Ø3.2Typical	
All Dimensions in mm		

Maximum Ratings(@TA = 25°C unless otherwise specified)

Characteristic	Symbol	GBS 2A	GBS 2B	GBS 2D	GBS 2G	GBS 2J	GBS 2K	GBS 2M	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
50Hz sine wave, R-load Without heat sink Ta=25°C 50Hz sine wave, R-load With heat sink Tc=50°C	I _{F(AV)}				1.0				A
					2.0				
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}				60				A
I ² t Rating for fusing @T _j =25°C	I ² t				14.9				A ² S

Thermal Characteristics

Characteristic	Symbol	Value		UNITS
Typical thermal resistance per leg (note 1) (note 2)	R _{θJL}	39		°C/W
	R _{θJL}	5.3		
Operating junction temperature range	T _J	- 55 ---- + 150		°C
Storage temperature range	T _{STG}	- 55 ---- + 150		°C

Electrical Characteristics (@TA = 25°C unless otherwise specified)

Characteristic	Symbol	Value		UNITS
Maximum instantaneous forward voltage @1.0A @2.0A	V _F	1.0 1.1		V
Maximum reverse current @T _A =25 °C at rated DC blocking voltage @T _A =100°C	I _R	5.0 500		μA

Fig.1-Forward Current Derating Curve

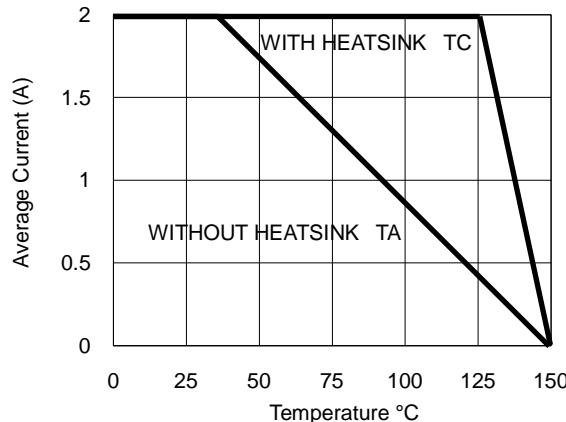


Fig.2- Surge Current Derating Curve

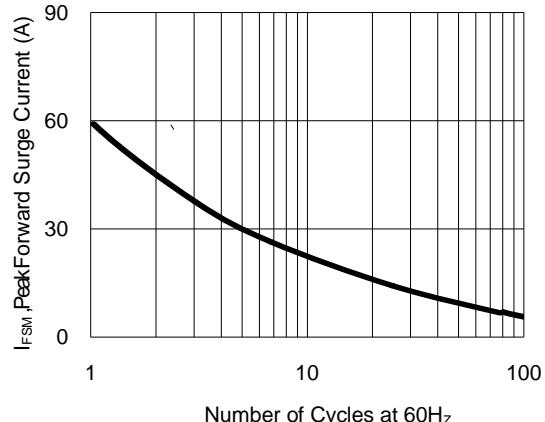


Fig.3- Typical Forward Voltage Characteristic

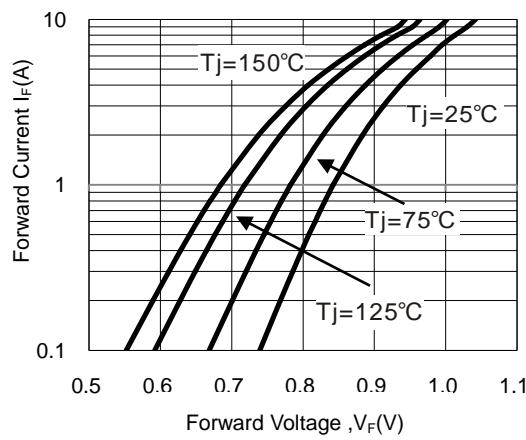


Fig.4- Typical Reverse Characteristic

