


FEATURES

- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has U/L flammability classification 94V-O
- Mounting position: Any
- Glass passivated chip junctions

Maximum Ratings (@TA = 25°C unless otherwise specified)

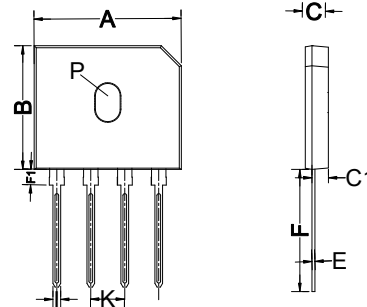

GBU		
Dim	Min	Max
A	21.60	22.40
B	18.20	19.80
C	3.20	3.80
C1	1.80	2.80
E	0.40	0.60
F	17.00min	
F1	1.70	2.40
I	0.95	1.25
K	4.70	5.30
P	R1.9typical	
All Dimensions in mm.		

Characteristic	Symbol	GBU6005	GBU601	GBU602	GBU604	GBU606	GBU608	GBU610	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward $T_c=100^\circ\text{C}$ Output current	$I_{F(AV)}$	6.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	175.0							A
I^2t Rating for fusing @ $T_j=25^\circ\text{C}$	I^2t	127							A ² S

Thermal Characteristics

Characteristic	Symbol	GBU6005	GBU601	GBU602	GBU604	GBU606	GBU608	GBU610	UNITS
Typical junction capacitance per element(note 3)	C _J	211				94			p F
Typical thermal resistance (note2) (note21)	R _{θJA} R _{θJC}	2.2 2.5							°C/W
Operating junction temperature range	T _J	- 55 ---- + 150							°C
Storage temperature range	T _{STG}	- 55 ---- + 150							°C

Electrical Characteristics (@TA = 25°C unless otherwise specified)

Characteristic	Symbol	GBU6005	GBU601	GBU602	GBU604	GBU606	GBU608	GBU610	UNITS
Maximum instantaneous forward voltage @3.0A @6.0A	V_F	1.0 1.1							V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=125^\circ\text{C}$	I_R	5.0 500							μA

NOTE: 1. Unit case mounted on 2.6x1.4x0.06" thick (6.5x3.5x0.15cm) Al. Plate.

2. Recommended mounting position is to bolt down on heatsink with silicone thermal compound f or maximum heat transfer with #6 screws

3. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts.

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

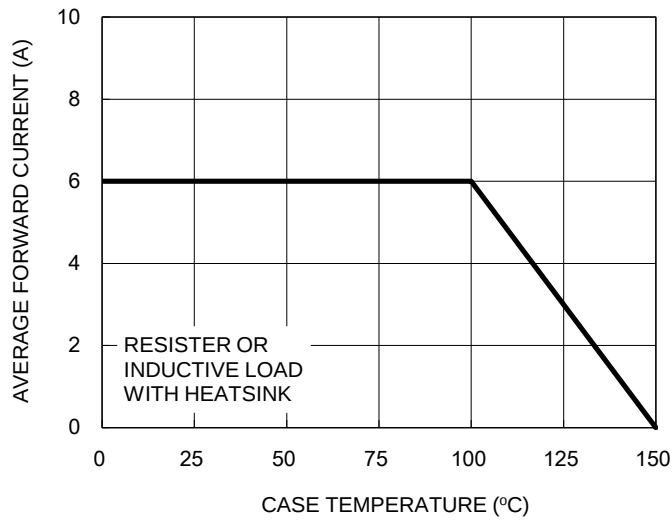


Fig.2 Typical Junction Capacitance

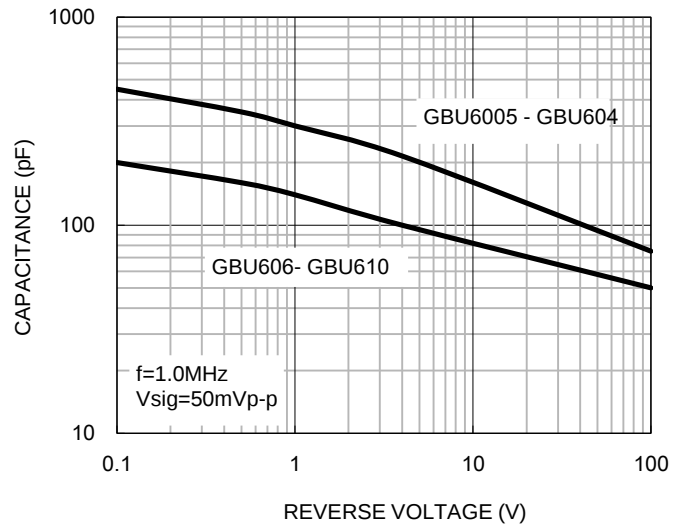


Fig.3 Typical Reverse Characteristics


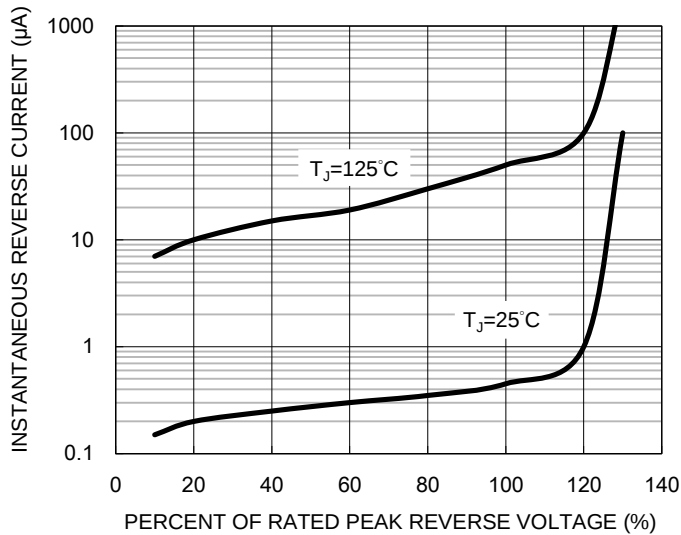



Fig.4 Typical Forward Characteristics

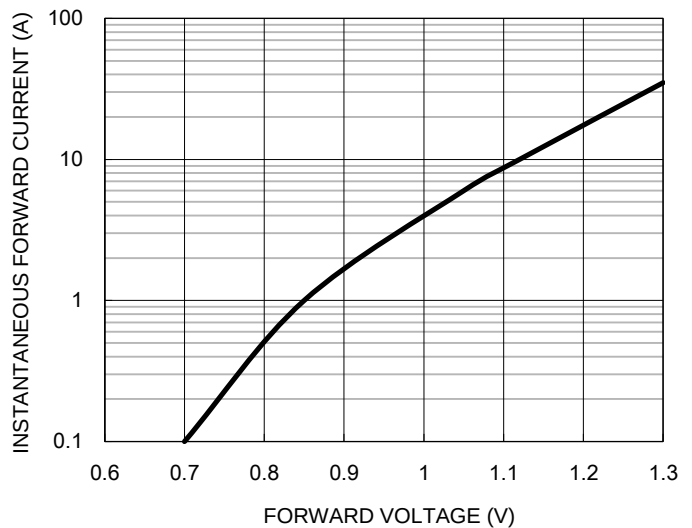

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.5 Maximum Non-repetitive Forward Surge Current

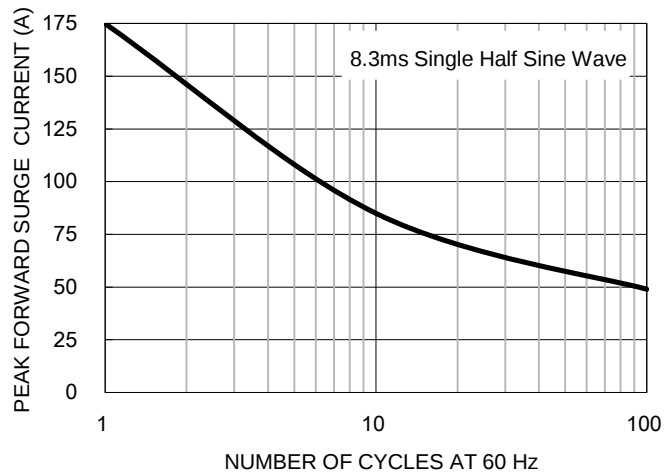

Device	Package	Shipping
GBU6005--GBU610	GBU	500 Units/Box