


FEATURES

- Glass passivated chip junctions
- High surge overload rating: 35A peak
- Saves space on printed circuit boards
- Plastic material has U/L flammability classification 94V-O
- High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs. (2.3kg) tension



MBM		
Dim	Min	Max
A	4.40	4.90
B	3.40	4.20
C	1.20	1.60
E	0.15	0.35
F	3.80	4.20
I	0.50	0.80
J	5.50	6.50
K	2.30	2.70
L	5.40	5.90
All Dimensions in mm		

MECHANICAL DATA

- Case: Molded plastic body over passivated junctions
- Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	MB2M	MB4M	MB6M	MB8M	MB10M	UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	200	400	600	800	1000	V
RMS Reverse Voltage	V _{RMS}	140	280	420	560	700	V
DC Blocking Voltage	V _{DC}	200	400	600	800	1000	V
Maximum average forward Output current @T _A =25°C	I _{F(AV)}	0.5 ¹⁾ 0.8 ²⁾					A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	35					A
Current squared time t < 8.3ms , T _a = 25 °C	I ² t	5.1					A ² s

Thermal Characteristics

Characteristic	Symbol	MB2M	MB4M	MB6M	MB8M	MB10M	UNITS
Typical junction capacitance per leg (NOTE 3)	C _J	13					p F
Typical thermal resistance per leg (NOTE 1)	R _{θJA}	85					°C/W
(NOTE 2)	R _{θJL}	20					
Operating junction temperature range	T _J	- 55 ---- + 150					°C
Storage temperature range	T _{STG}	- 55 ---- + 150					°C

Electrical Characteristics (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	MB2M	MB4M	MB6M	MB8M	MB10M	UNITS
Maximum instantaneous forward voltage at 0.4 A	V _F	1.0					V
Maximum reverse current @T _A =25°C	I _R	5.0					μ A
at rated DC blocking voltage @T _A =125°C		100					


NOTES: (1) On glass epoxy P.C.B. mounted on 0.05 x 0.05" (1.3 x 1.3mm) pads

(2) On aluminum substrate P.C.B. with an area of 0.8" x 0.8" (20 x 20mm) mounted on 0.05 x 0.05" (1.3 x 1.3mm) solder pad

(3) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

AVERAGE FORWARD CURRENT, AMPERES


FIG.1 – DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

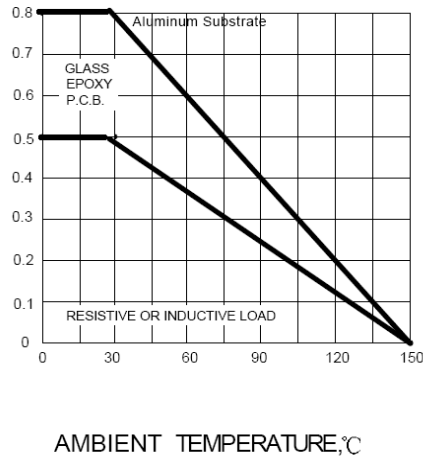

AMBIENT TEMPERATURE, °C

INSTANTANEOUS FORWARD CURRENT, AMPERES


FIG.3 – TYPICAL FORWARD VOLTAGE CHARACTERISTICS PER LEG

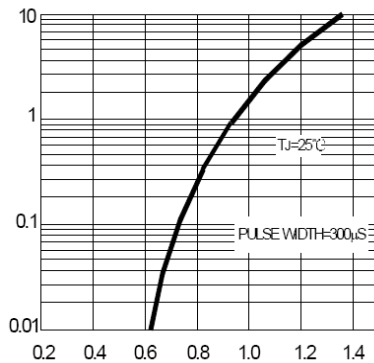

INSTANTANEOUS FORWARD VOLTAGE, VOLTS

PEAK FORWARD SURGE CURRENT, AMPERES


FIG.2 – MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

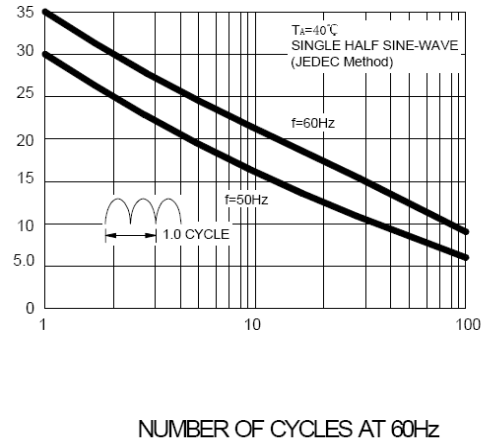

NUMBER OF CYCLES AT 60Hz

INSTANTANEOUS REVERSE CURRENT, MICRO AMPERES


FIG.4 – TYPICAL REVERSE CHARACTERISTIC

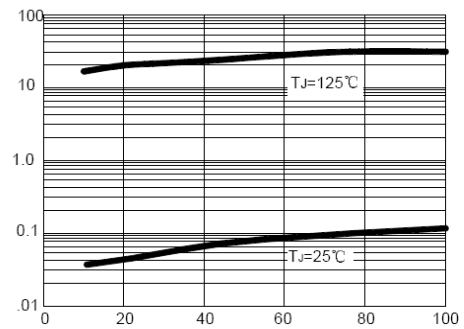

PERCENT OF RATED PEAK REVERSE VOLTAGE, %

FIG.5 – TYPICAL JUNCTION CAPACITANCE PER ELEMENT

CAPACITANCE, pF

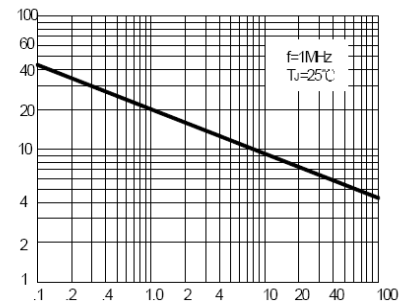

REVERSE VOLTAGE, VOLTS

Device	Package	Shipping
MB2M--MB10M	MBM	100unit/pipe