

Features


- UL recognition, file #E476985
- Glass passivated chip
- High surge current capability
- Low thermal resistance
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

General purpose use in AC/DC bridge full wave rectification for power supply, home appliances, office equipment, industrial automation applications.

Mechanical Data

- **Package:** SKBPC
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B10

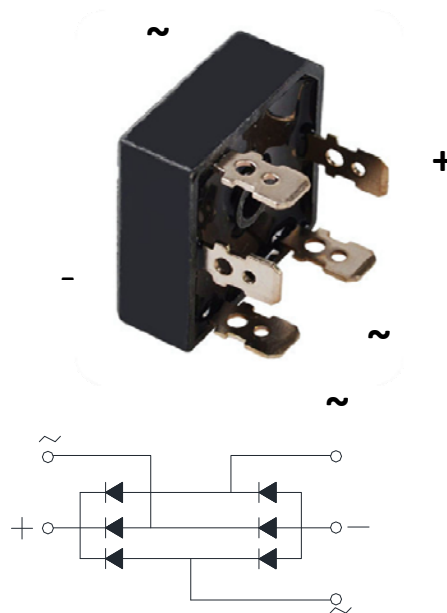

■Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SKBPC5004	SKBPC5006	SKBPC5008	SKBPC5010	SKBPC5012	SKBPC5014	SKBPC5016
Device marking code			SKBPC5004	SKBPC5006	SKBPC5008	SKBPC5010	SKBPC5012	SKBPC5014	SKBPC5016
Repetitive Peak Reverse Voltage	VRRM	V	400	600	800	1000	1200	1400	1600
Average Rectified Output Current @60Hz sine wave, R-load, With heatsink $T_c=55^{\circ}\text{C}$	I_O	A	50						
Surge(Non-repetitive)Forward Current @60HZ Half- sine Wave, 1 cycle, $T_a=25^{\circ}\text{C}$	IFSM	A	500						
Current Squared Time @1ms≤t<8.3ms $T_j=25^{\circ}\text{C}$, Rating of per diode	I^2t	A ² S	1040						
Storage Temperature	Tstg	°C	-55 ~+150						
Junction Temperature	T_j	°C	-55~+150						
Dielectric Strength, Terminals to case, AC 1 minute	V_{dis}	KV	2.5						
Mounting Torque	TOR	kg·cm	10						

■Electrical Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	SKBPC5006	SKBPC5008	SKBPC5008	SKBPC5010	SKBPC5012	SKBPC5014	SKBPC5016
Maximum instantaneous forward voltage drop per diode	VFM	V	IFM=25A	1.2						
Maximum DC reverse current at rated DC blocking voltage per diode	IRRM	μA	VRM=VRRM	10						

■Thermal Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SKBPC5006	SKBPC5008	SKBPC5008	SKBPC5010	SKBPC5012	SKBPC5014	SKBPC5016
Thermal Resistance Between junction and case, With heatsink	$R_{\theta J-C}$	°C/W	0.9						

■ Characteristics (Typical)

FIG1: I_o - T_c Curve

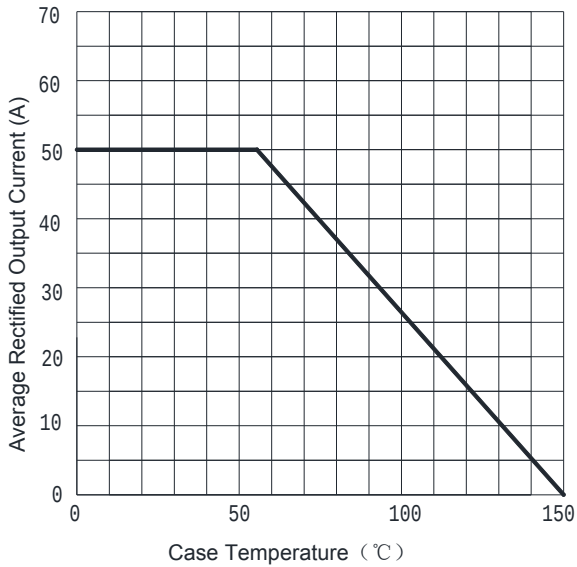


FIG2: Surge Forward Current Capability

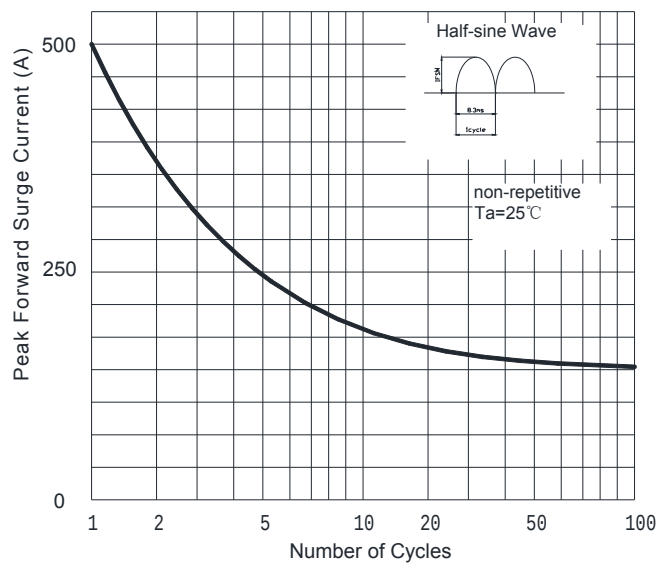


FIG3: Instantaneous Forward Voltage



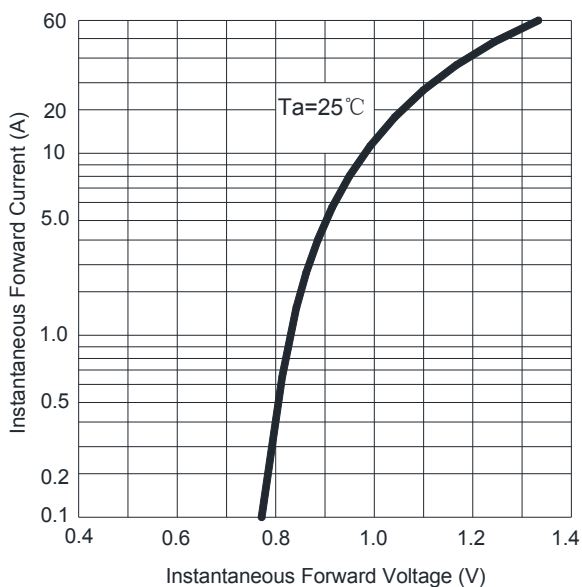


FIG4: Typical Reverse Characteristics

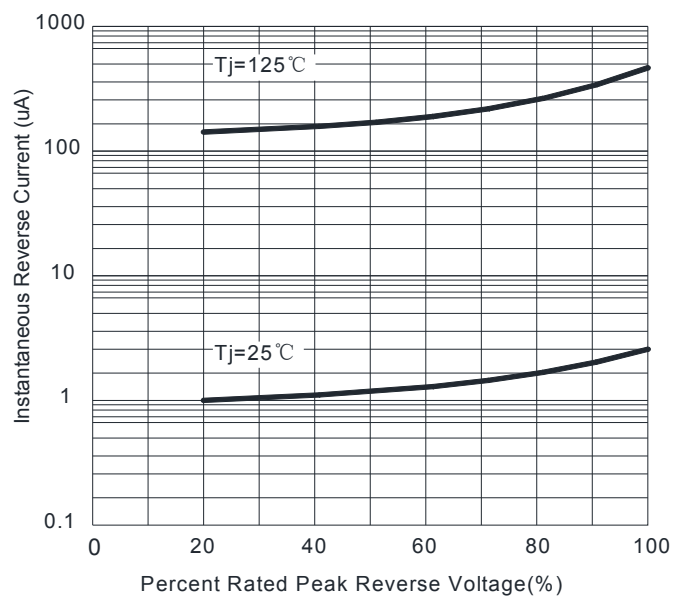

■ Outline Dimensions

SKBPC

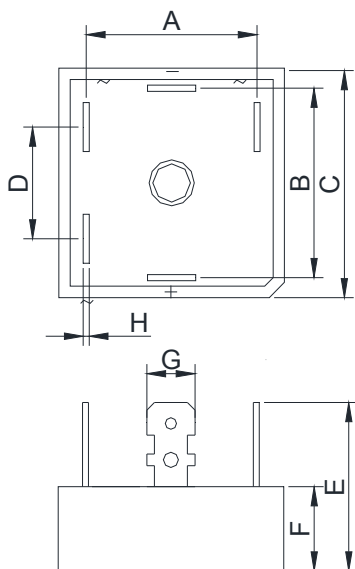

SKBPC		
Dim	Min	Max
A	23.1	24.1
B	23.1	24.1
C	28.2	28.8
D	16	17
E	/	25
F	10.8	11.2
G	6.2	6.4
H	0.75	0.85

Dimensions in millimeters

■ Ordering Information (Example)

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SKBPC5004~SKBPC5016	SKBPC	Approximate 19	50	50	500	Paper Box