



Features

- Adopt FRD chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

Typical Applications


Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** TO-220AC ITO-220AC
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

TYPE	V_{RSM} V	V_{RRM} V
MTSR3060	600	600
MTSR3060F	600	600

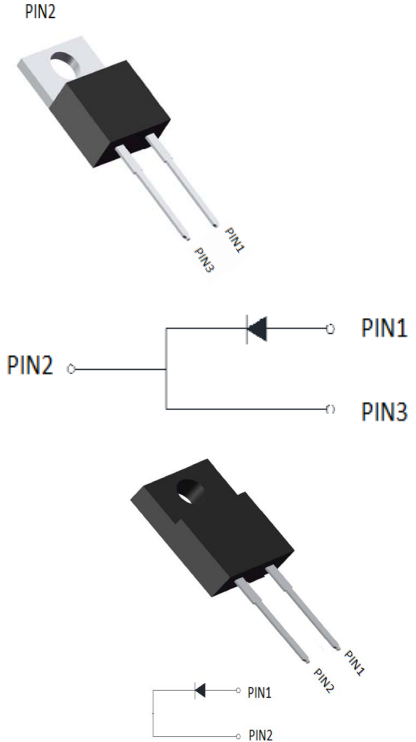

Symbol	Test Conditions	Maximum Ratings	Unit
I_{FRMS} I_{FAVM} I_{FRM}	$T_{VJ}=T_{VJM}$ $T_C=85^{\circ}\text{C}$; rectangular, $d=0.5$ $t_p<10\mu\text{s}$; rep. rating, pulse width limited by T_{VJM}	60 30 375	A
I_{FSM}	$T_{VJ}=45^{\circ}\text{C}$ $t=10\text{ms}$ (50Hz), sine $t=8.3\text{ms}$ (60Hz), sine	300 320	A
	$T_{VJ}=150^{\circ}\text{C}$ $t=10\text{ms}$ (50Hz), sine $t=8.3\text{ms}$ (60Hz), sine	260 280	
I^2t	$T_{VJ}=45^{\circ}\text{C}$ $t=10\text{ms}$ (50Hz), sine $t=8.3\text{ms}$ (60Hz), sine	450 420	A^2s
	$T_{VJ}=150^{\circ}\text{C}$ $t=10\text{ms}$ (50Hz), sine $t=8.3\text{ms}$ (60Hz), sine	340 320	
T_{VJ} T_{VJM} T_{stg}		-40...+175 175 -40...+175	$^{\circ}\text{C}$
P_{tot}	$T_C=25^{\circ}\text{C}$	125	W
M_d	Mounting torque	0.8...1.2	Nm
Weight	typical	6	g

■ Characteristics (Typical)

Symbol	Test Conditions	Characteristic Values typ.	max.	Unit
I_R	$T_{VJ}=25^{\circ}\text{C}; V_R=V_{RRM}$ $T_{VJ}=25^{\circ}\text{C}; V_R=0.8 \cdot V_{RRM}$ $T_{VJ}=125^{\circ}\text{C}; V_R=0.8 \cdot V_{RRM}$		100 50 7	μA μA mA
V_F	$I_F=30\text{A}; T_{VJ}=150^{\circ}\text{C}$ $T_{VJ}=25^{\circ}\text{C}$		1.9 2.3	V
V_{TO}	For power-loss calculations only		1.01	V
r_T	$T_{VJ}=T_{VJM}$		7.1	$\text{m}\Omega$
R_{thJC} R_{thCK} R_{thJA}		0.25	1 35	K/W
t_{rr}	$I_F=1\text{A}; -di_F/dt=100\text{A}/\mu\text{s}; V_R=30\text{V}; T_{VJ}=25^{\circ}\text{C}$	20	25	ns
I_{RM}	$V_R=350\text{V}; I_F=30\text{A}; -di_F/dt=240\text{A}/\mu\text{s}; L \leq 0.05\mu\text{H}; T_{VJ}=100^{\circ}\text{C}$	10	11	A

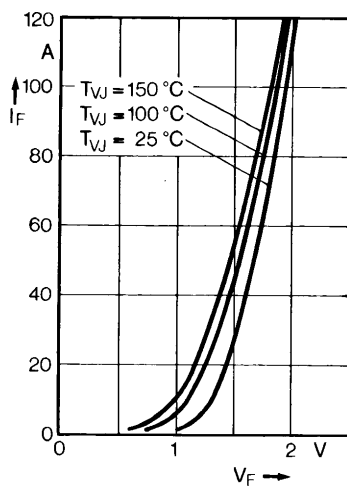


Fig. 1 Forward current versus voltage drop.

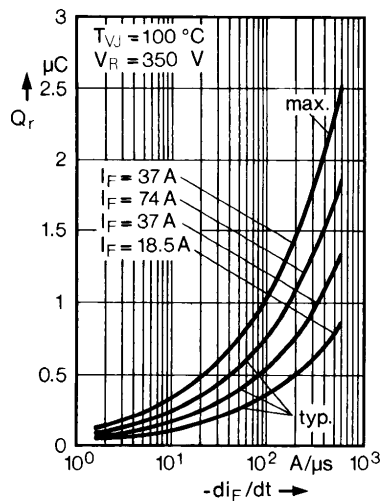


Fig. 2 Recovery charge versus $-di_F/dt$.

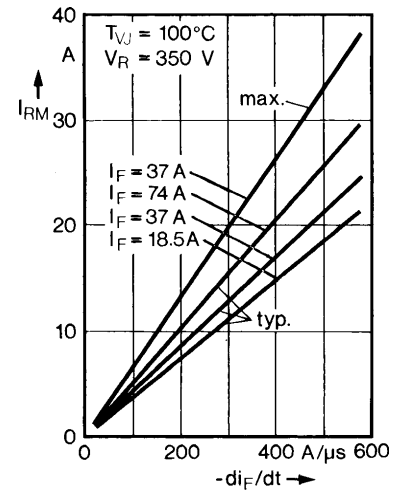


Fig. 3 Peak reverse current versus $-di_F/dt$.

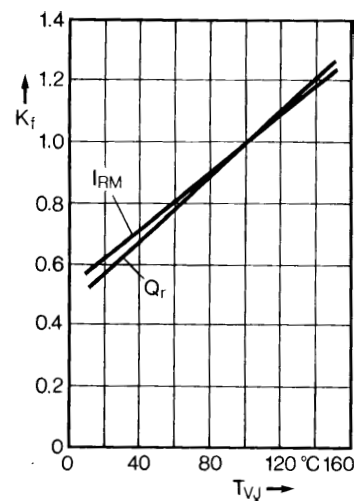


Fig. 4 Dynamic parameters versus junction temperature.

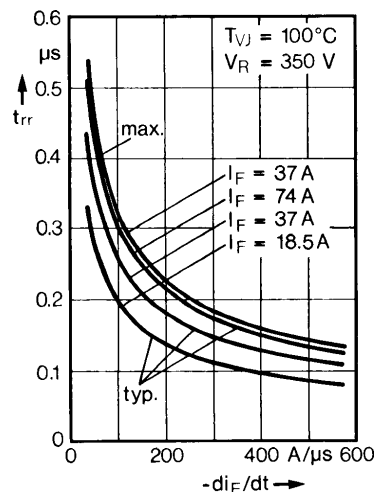


Fig. 5 Recovery time versus $-di_F/dt$.



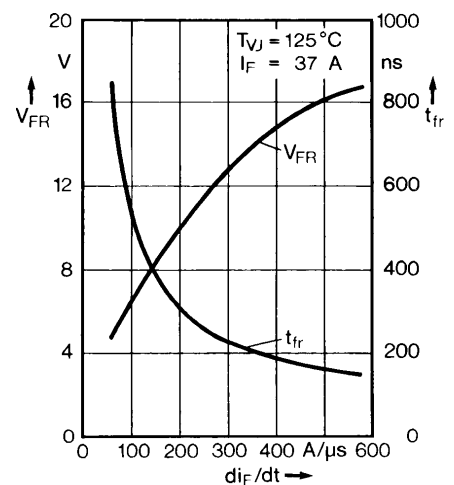


Fig. 6 Peak forward voltage versus di_F/dt .

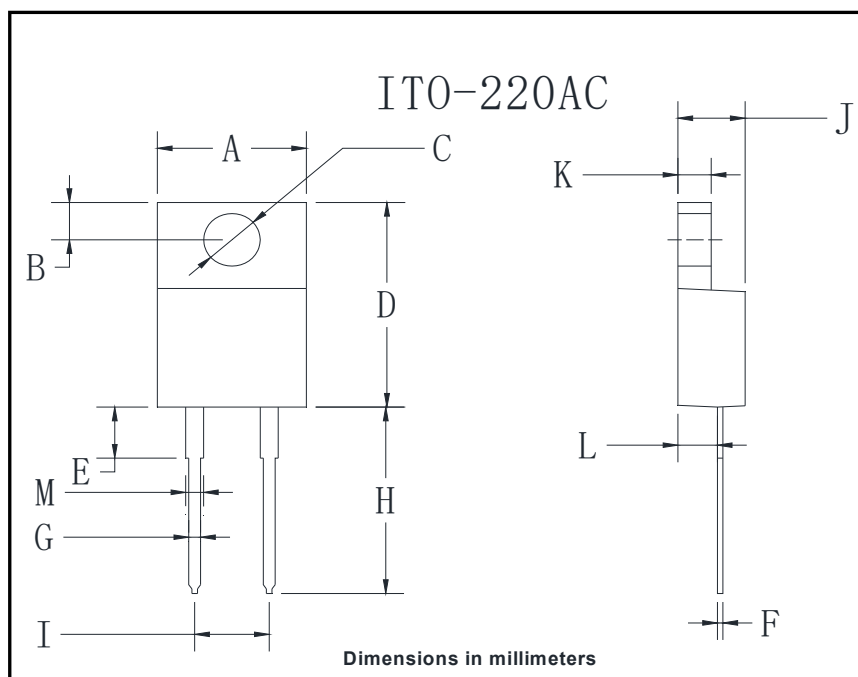

ITO-220AC		
Dim	Min	Max
A	9.8	10.2
B	2.25	2.75
C	2.95	3.45
D	14.75	15.25
E	3.5	4.1
F	0.45	0.75
G	0.45	0.75
H	13.35	14.15
I	4.97	5.23
J	4.3	4.8
K	2.5	2.74
L	2.58	2.82
M	1.03	1.43

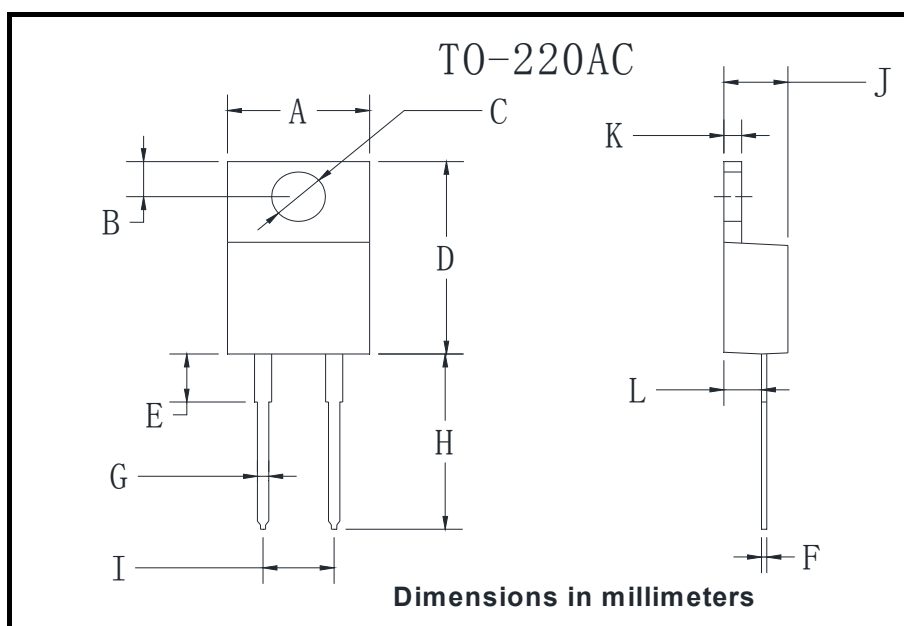

TO-220AC		
Dim	Min	Max
A	9.95	10.35
B	2.55	2.95
C	3.75	4.05
D	14.95	15.25
E	3.75	4.25
F	0.26	0.5
G	0.68	0.94
H	13.3	13.9
I	4.86	5.26
J	4.38	4.78
K	1.14	1.4
L	2.37	2.79

Packge	Packing	Box Size L×W×H(mm)	Quatity(pcs/box)	Carton Size L×W×H(mm)	Quatity(pcs/carton)
TO-220AC	50pcs/Tube	558×148×38	1000	565×225×175	5000