



78LXX

Three-Terminal Low Current Positive Voltage Regulators

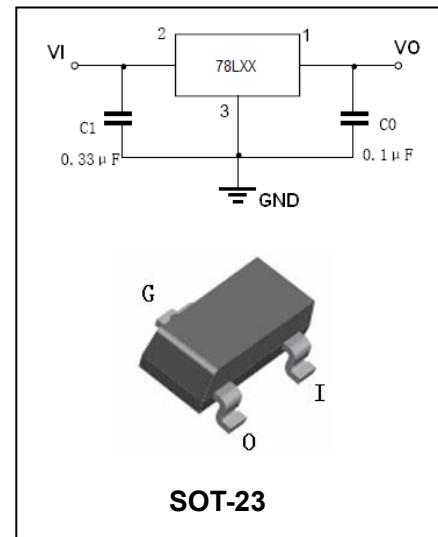


FEATURES

- Wide range of available, fixed output voltage.
- Low cost.
- Internal short-circuit current limiting.
- Internal thermal overload protection.
- No external components required.
- Complementary negative regulators offered (BL79LXX series).

APPLICATIONS

- Three-terminal positive voltage regulator.



ORDERING INFORMATION

Type No.	Marking	Package Code
78LXX	78LXX	SOT-23

MAXIMUM RATING @ $T_a=25^\circ C$ unless otherwise specified

Symbol	Parameter	Value	Units
V_I	Input voltage(78L33-78L09) (78L10-78L15) (78L18-78L24)	30 35 40	V
I_{CM}	Maximum output current	100	mA
P_D	Power dissipation	350	mW
T_{OPR}	Operating junction temperature	-40 to +125	°C
T_{STG}	Storage temperature range	-65 to +150	°C



78LXX

Three-Terminal Low Current Positive Voltage Regulators



ELECTRICAL CHARACTERISTICS

(V_{IN}=10V,I_O=40mA,0°C<T_j<125°C,C_I=0.33μF,C_O=0.1μF,unless otherwise specified)

Parameter	Symbol	Test conditions	78L33			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C 5.3V≤V _i ≤20V,I _O =1mA-40mA V _i =8.3V,I _O =1mA-70mA	3.168 3.135 3.135	3.3	3.432 3.465 3.465	V
Load regulation	Reg _{load}	T _j =25°C, I _O =1mA-100mA T _j =25°C, I _O =1mA-40mA			60 30	mV
Line regulation	Reg _{line}	5.3V≤V _i ≤20V, T _j =25°C 6.3V≤V _i ≤20V, T _j =25°C			150 100	mV
Input Bias Current	I _{IB}	T _j =25°C T _j =125°C			6.0 5.5	mA
Input Bias Current Change	△I _{IB}	6.3V≤V _i ≤20V 1mA≤I _O ≤40mA			1.5 0.1	mA
Output noise voltage	V _N	10Hz ≤f≤100KHz		40		μV
Ripple rejection	RR	I _O =40mA,6.3V≤V _i ≤16.3V f=120Hz,T _j =25°C	41	49		dB
Dropout voltage	V _I -V _O	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_{IN}=10V,I_O=40mA,0°C<T_j<125°C,C_I=0.33μF,C_O=0.1μF,unless otherwise specified)

Parameter	Symbol	Test conditions	78L05			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C 7V≤V _i ≤20V,I _O =1mA-40mA V _i =10V,I _O =1mA-70mA	4.8 4.75 4.75	5.0	5.2 5.25 5.25	V
Load regulation	Reg _{load}	T _j =25°C, I _O =1mA-100mA T _j =25°C, I _O =1mA-40mA		11 5	60 30	mV
Line regulation	Reg _{line}	7V≤V _i ≤20V, T _j =25°C 8V≤V _i ≤20V, T _j =25°C		55 45	150 100	mV
Input Bias Current	I _{IB}	T _j =25°C T _j =125°C		3.8	6.0 5.5	mA
Input Bias Current Change	△I _{IB}	8V≤V _i ≤20V 1mA≤I _O ≤40mA			1.5 0.1	mA
Output noise voltage	V _N	10Hz ≤f≤100KHz		40		μV
Ripple rejection	RR	I _O =40mA,8V≤V _i ≤18V,f=120Hz ,T _j =25°C	41	49		dB
Dropout voltage	V _I -V _O	T _j =25°C		1.7		V



ELECTRICAL CHARACTERISTICS

($V_{IN}=12V, I_o=40mA, 0^\circ C < T_j < 125^\circ C, C_l=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	78L06			UNIT
			MIN	TYP	MAX	
Output voltage	V_o	$T_j=25^\circ C$	5.75	6.0	6.25	V
		$V_i = 8.5V-20V, I_o=1mA-40mA$	5.7		6.3	
		$V_i = 8.5V, I_o=1mA-70mA$	5.7		6.3	
Load regulation	Reg_{load}	$T_j=25^\circ C, I_o=1mA-100mA$		12.8	80	mV
		$T_j=25^\circ C, I_o=1mA-70mA$		5.8	40	
Line regulation	Reg_{line}	$8.5V \leq V_i \leq 20V, T_j=25^\circ C$		64	175	mV
		$9V \leq V_i \leq 20V, T_j=25^\circ C$		54	125	
Input Bias Current	I_{IB}	$T_j=125^\circ C, V_{IN}=12V, I_o=40mA$			5.5	mA
		$T_j=25^\circ C, V_{IN}=12V, I_o=40mA$		3.9	6.0	
Input Bias Current Change	ΔI_{IB}	$9V \leq V_i \leq 20V$			1.5	mA
		$1mA \leq I_o \leq 40mA$			0.1	
Output noise voltage	V_N	$10Hz \leq f \leq 100KHz$		40		μV
Ripple rejection	RR	$I_o=40mA, 10V \leq V_i \leq 20V, f=120Hz, T_j=25^\circ C$	40	46		dB
Dropout voltage	V_D	$T_j=25^\circ C$		1.7		V

ELECTRICAL CHARACTERISTICS

($V_{IN}=14V, I_o=40mA, 0^\circ C < T_j < 125^\circ C, C_l=0.33\mu F, C_o=0.1Mf$, unless otherwise specified)

Parameter	Symbol	Test conditions	78L08			UNIT
			MIN	TYP	MAX	
Output voltage	V_o	$T_j=25^\circ C$	7.7	8.0	8.3	V
		$10.5V \leq V_i \leq 23V, I_o=1mA-40mA$	7.6		8.4	
		$V_i = 14V, I_o=1mA-70mA$	7.6		8.4	
Load regulation	Reg_{load}	$T_j=25^\circ C, I_o=1mA-100mA$		15	80	mV
		$T_j=25^\circ C, I_o=1mA-40mA$		8.0	40	
Line regulation	Reg_{line}	$10.5V \leq V_i \leq 23V, T_j=25^\circ C$		20	175	mV
		$11V \leq V_i \leq 23V, T_j=25^\circ C$		12	125	
Input Bias Current	I_{IB}	$T_j=25^\circ C$		3	6.0	mA
		$T_j=125^\circ C$			5.5	
Input Bias Current Change	ΔI_{IB}	$11V \leq V_i \leq 23V$			1.5	mA
		$1mA \leq I_o \leq 40mA$			0.1	
Output noise voltage	V_N	$T_A=25^\circ C, 10Hz \leq f \leq 100KHz$		60		μV
Ripple rejection	RR	$I_o=40mA, 12V \leq V_i \leq 23V, f=120Hz, T_j=25^\circ C$	37	57		dB
Dropout voltage	V_i-V_o	$T_j=25^\circ C$		1.7		V



78LXX

Three-Terminal Low Current Positive Voltage Regulators



ELECTRICAL CHARACTERISTICS

(V_{IN}=15V, I_O=40mA, 0°C < T_j < 125°C, C_I=0.33μF, C_O=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	78L09			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	8.6	9.0	9.4	V
		V _i =11.5V-24V, I _O =1mA-40mA	8.5		9.5	
		V _i =15V, I _O =1mA-70mA	8.5		9.5	
Load regulation	Reg _{load}	T _j =25°C, I _O =1mA-100mA		15	90	mV
		T _j =25°C, I _O =1mA-40mA		8.0	40	
Line regulation	Reg _{line}	11.5V≤V _i ≤24V, T _j =25°C		20	175	mV
		12V≤V _i ≤24V, T _j =25°C		12	125	
Input Bias Current	I _{IB}	T _j =25°C		3.0	6.0	mA
		T _j =125°C			5.5	
Input Bias Current Change	△I _{IB}	11V≤V _i ≤23V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output noise voltage	V _N	T _A =25°C, 10Hz≤f≤100KHz		60		μV
Ripple rejection	RR	I _O =40mA, 13V≤V _i ≤24V, f=120Hz, T _j =25°C	37	57		dB
Dropout voltage	V _I -V _O	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_{IN}=19V, I_O=40mA, 0°C < T_j < 125°C, C_I=0.33μF, C_O=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	78L12			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	11.5	12	12.5	V
		V _i =14.5V-27V, I _O =1mA-40mA	11.4		12.6	
		V _i =19V, I _O =1mA-70mA	11.4		12.6	
Load regulation	Reg _{load}	T _j =25°C, I _O =1mA-100mA		20	100	mV
		T _j =25°C, I _O =1mA-40mA		10	50	
Line regulation	Reg _{line}	14.5V≤V _i ≤27V, T _j =25°C		120	250	mV
		16V≤V _i ≤27V, T _j =25°C		100	200	
Input Bias Current	I _{IB}	T _j =25°C		4.2	6.5	mA
		T _j =125°C			6.0	
Input Bias Current Change	△I _{IB}	16V≤V _i ≤27V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output Noise Voltage	V _N	10Hz≤f≤100KHz, T _A =25°C		80		μV
Ripple rejection	RR	I _O =40mA, 15V≤V _i ≤25V, f=120Hz, T _j =25°C	37	42		dB
Dropout voltage	V _I -V _O	T _j =25°C		1.7		V



78LXX

Three-Terminal Low Current Positive Voltage Regulators



ELECTRICAL CHARACTERISTICS

(V_{IN}=23V, I_O=40mA, 0°C < T_j < 125°C, C_I=0.33μF, C_O=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	78L15			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	14.4	15	15.6	V
		V _i =17.5V-30V, I _O =1mA-40mA	14.25		15.75	
		V _i =23V, I _O =1mA-70mA	14.25		15.75	
Load regulation	△Reg _{load}	T _j =25°C, I _O =1mA-100mA		25	150	mV
		T _j =25°C, I _O =1mA-40mA		12	75	
Line regulation	△Reg _{line}	17.5V≤V _i ≤30V, T _j =25°C		130	300	mV
		20V≤V _i ≤30V, T _j =25°C		110	250	
Input Bias Current	I _{IB}	T _j =25°C		4.4	6.5	mA
		T _j =125°C			6.0	
Input Bias Current Change	△I _{IB}	20V≤V _i ≤30V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output noise voltage	V _N	10Hz≤f≤100KHz, T _A =25°C		90		μV
Ripple rejection	RR	I _O =40mA, 18.5V≤V _i ≤28.5V, f=120Hz, T _j =25°C	34	39		dB
Dropout voltage	V _I -V _O	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_{IN}=27V, I_O=40mA, 0°C < T_j < 125°C, C_I=0.33μF, C_O=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	78L18			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	17.3	18	18.7	V
		V _i =20.7V-33V, I _O =1mA-40mA	17.1		18.9	
		V _i =27V, I _O =1mA-70mA	17.1		18.9	
Load regulation	Reg _{load}	T _j =25°C, I _O =1mA-100mA		30	170	mV
		T _j =25°C, I _O =1mA-40mA		15	85	
Line regulation	Reg _{line}	20.7V≤V _i ≤33V, T _j =25°C		45	325	mV
		21V≤V _i ≤33V, T _j =25°C		35	275	
Input Bias Current	I _{IB}	T _j =25°C		3.1	6.5	mA
		T _j =125°C			6.0	
Input Bias Current Change	△I _{IB}	21V≤V _i ≤33V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output Noise Voltage	V _N	10Hz≤f≤100KHz, T _A =25°C		150		μV
Ripple rejection	RR	I _O =40mA, 23V≤V _i ≤33V, f=120Hz, T _j =25°C	33	48		dB
Dropout voltage	V _I -V _O	T _j =25°C		1.7		V



78LXX

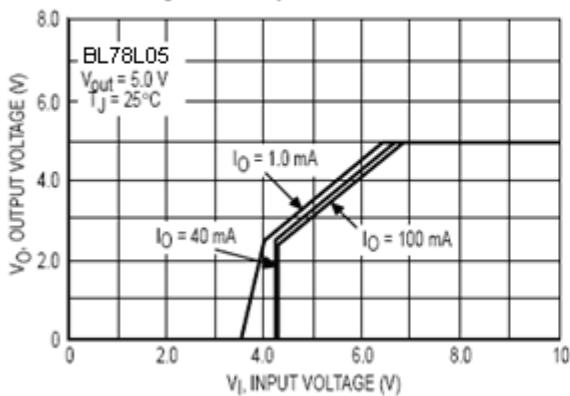
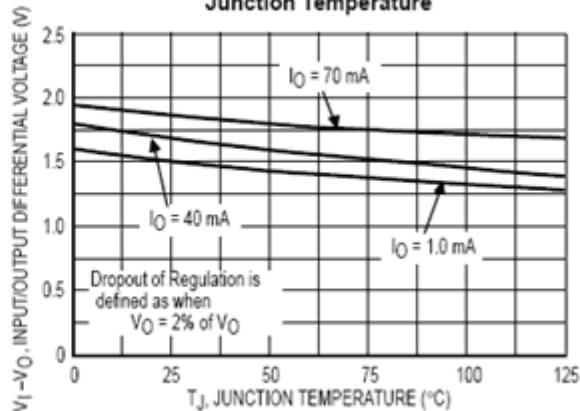
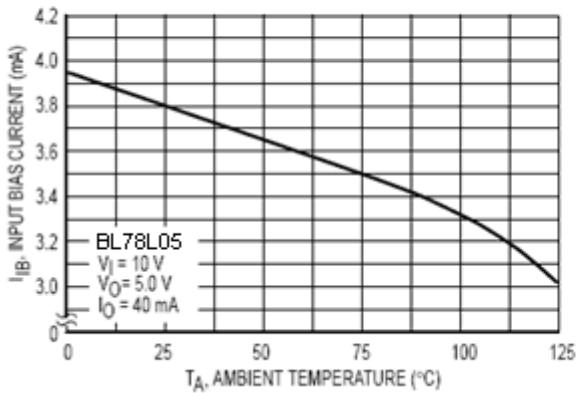
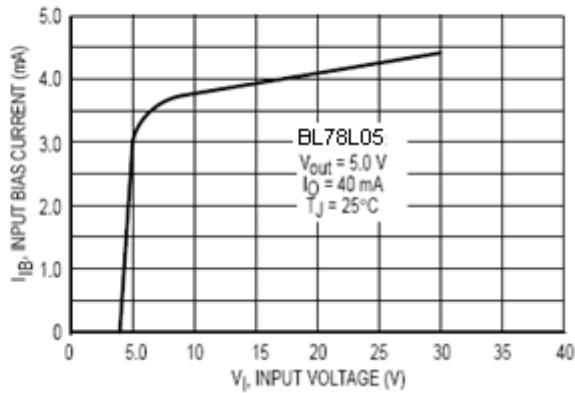
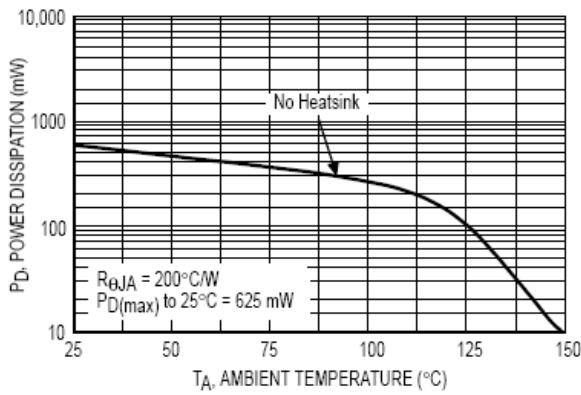
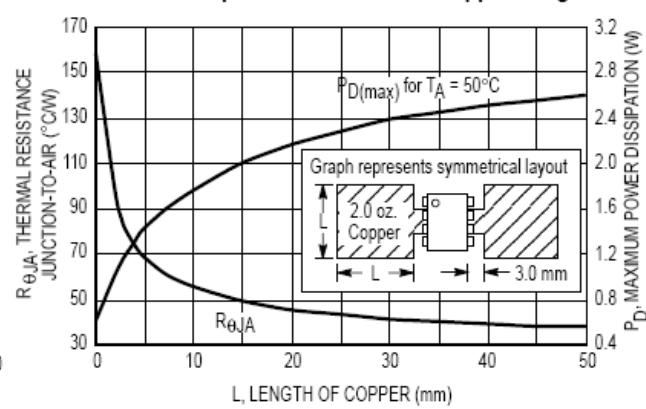
Three-Terminal Low Current Positive Voltage Regulators



ELECTRICAL CHARACTERISTICS

(V_{IN}=33V, I_O=40mA, 0°C < T_j < 125°C, C_I=0.33μF, C_O=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	78L24			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	23	24	25	V
		V _i =27V-38V, I _O =1mA-40mA	22.8		25.2	
		V _i =27V-33V, I _O =1mA-70mA	22.8		25.2	
Load regulation	△Reg _{load}	T _j =25°C, I _O =1mA-100mA		40	200	mV
		T _j =25°C, I _O =1mA-40mA		20	100	
Line regulation	△Reg _{line}	27.5V≤V _i ≤38V, T _j =25°C		35	350	mV
		28V≤V _i ≤38V, T _j =25°C		30	300	
Input Bias Current	I _{IB}	T _j =25°C		3.1	6.5	mA
		T _j =125°C			6.0	
Input Bias Current Change	△I _{IB}	28V≤V _i ≤38V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output noise voltage	V _N	10Hz≤f≤100KHz, T _A =25°C		200		μV
Ripple rejection	RR	I _O =40mA, 29V≤V _i ≤35V, f=120Hz, T _j =25°C	31	45		dB
Dropout voltage	V _I -V _O	T _j =25°C		1.7		V

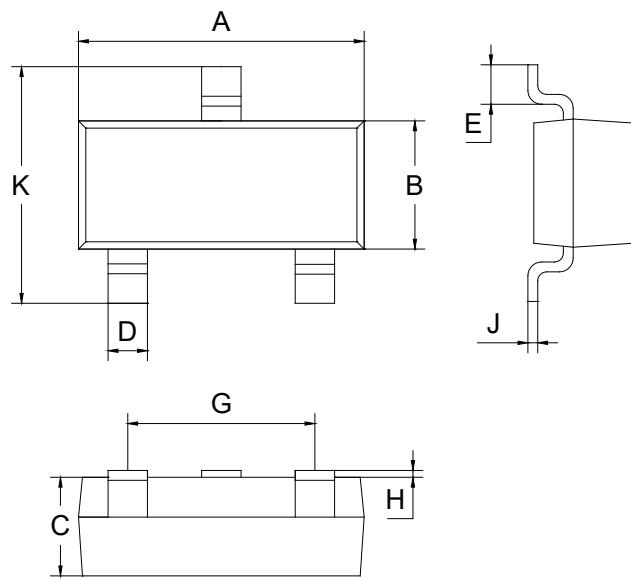

TYPICAL CHARACTERISTICS @ $T_a = 25^\circ\text{C}$ unless otherwise specified
Figure 1. Dropout Characteristics

Figure 2. Dropout Voltage versus Junction Temperature

Figure 3. Input Bias Current versus Ambient Temperature

Figure 4. Input Bias Current versus Input Voltage

Figure 5. Maximum Average Power Dissipation versus Ambient Temperature – TO-92 Type Package

Figure 6. SOP-8 Thermal Resistance and Maximum Power Dissipation versus P.C.B. Copper Length




PACKAGE OUTLINE

Plastic surface mounted package

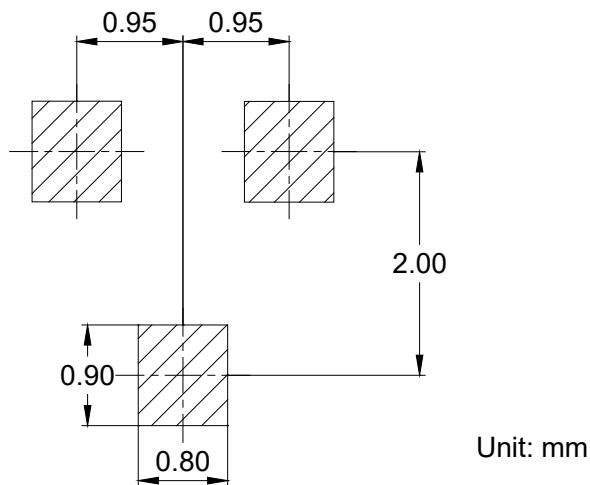
SOT-23



SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

All Dimensions in mm

SOLDERING FOOTPRINT



PACKAGE INFORMATION

Device	Package	Shipping
78LXX	SOT-23	3000pcs / Tape & Reel