





Features

- High DC current gain
- Complimentary to SS8550W

Mechanical Data

- Case: SOT-323
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208



SOT-323

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
SS8050W	SOT-323	3000 pcs / Tape & Reel	Y1

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Breakdown Voltage	V _{CBO}	40	V
Collector-Emitter Breakdown Voltage	V _{CEO}	25	V
Emitter-Base Breakdown Voltage	V _{EBO}	6	V
Collector Current (Continuous)	I _C	1.5	A
Collector Current (Peak)	I _{CM}	2	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	0.2	W
Junction Temperature Range	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C



Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 100\mu\text{A}, I_E = 0$	40	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 2\text{mA}, I_B = 0$	25	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 100\mu\text{A}, I_C = 0$	6	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB} = 40\text{V}, I_E = 0$	-	-	0.1	μA
Collector Cut-off Current	I_{CEO}	$V_{CE} = 20\text{V}, I_B = 0$	-	-	0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$	-	-	0.1	μA
DC Current Gain	h_{FE}	$V_{CE} = 1\text{V}, I_C = 0.1\text{A}$	120	-	400	-
		$V_{CE} = 1\text{V}, I_C = 0.8\text{A}$	40	-	-	-
Collector-emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 0.8\text{A}, I_B = 0.08\text{A}$	-	-	0.5	V
Base-emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 0.8\text{A}, I_B = 0.08\text{A}$	-	-	1.2	V
Base-emitter on Voltage	$V_{BE(on)}$	$V_{CE} = 1\text{V}, I_C = 10\text{mA}$	-	-	1	V
Transition Frequency	f_T	$I_C = 50\text{mA}, V_{CE} = 10\text{V}$	100	-	-	MHz

Classification of h_{FE}

Rank	L	H	J
Range	120-200	200-350	300-400



Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

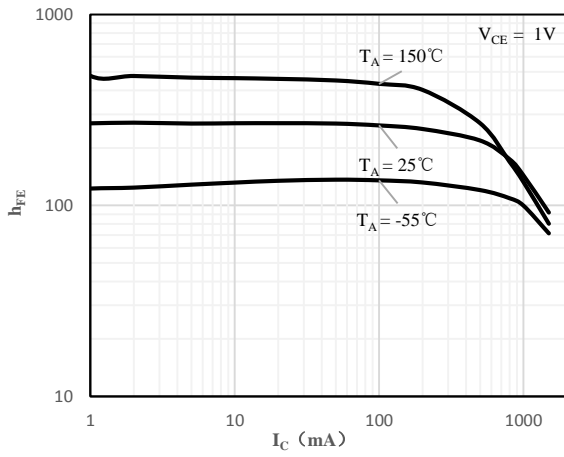


Fig 1 h_{FE} vs. I_C (H)

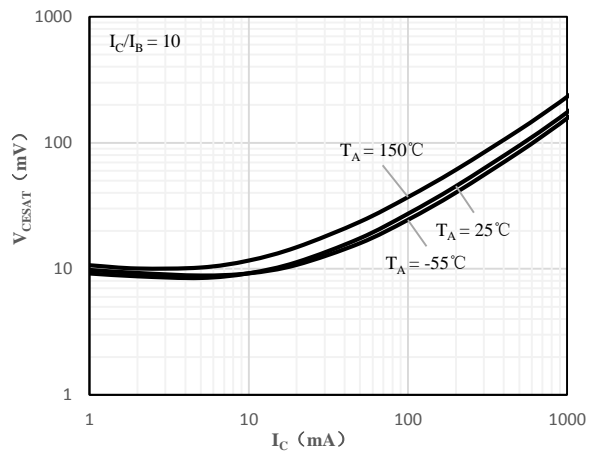


Fig 2 $V_{CE(sat)}$ vs. I_C

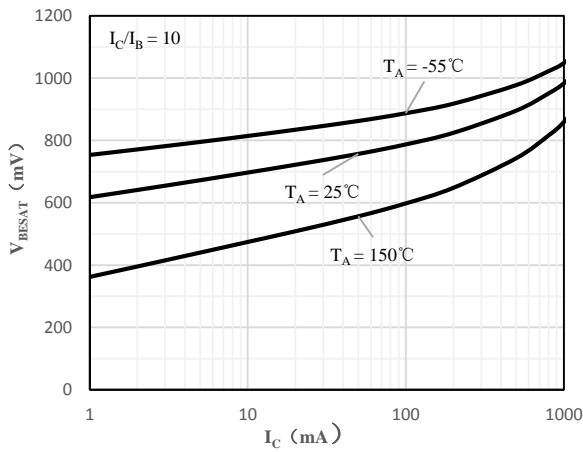


Fig 3 $V_{BE(sat)}$ vs. I_C

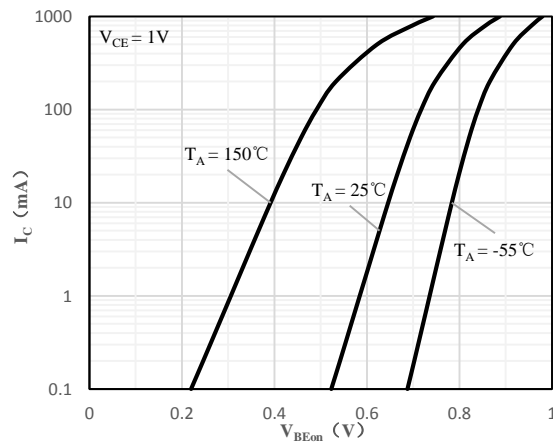


Fig 4 $V_{BE(on)}$ vs. I_C


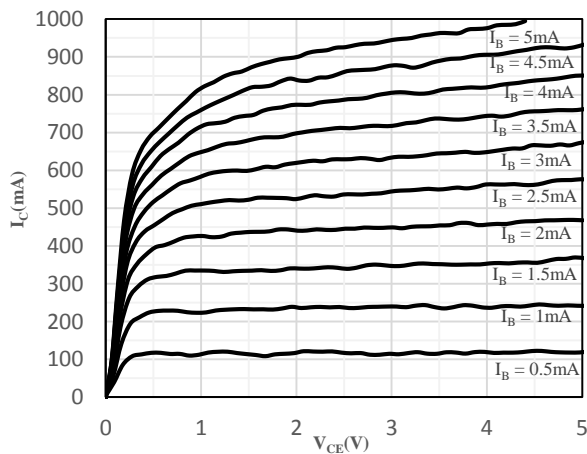


Fig 5 I_C vs. V_{CE}




Package Outline Dimensions (Unit: mm)

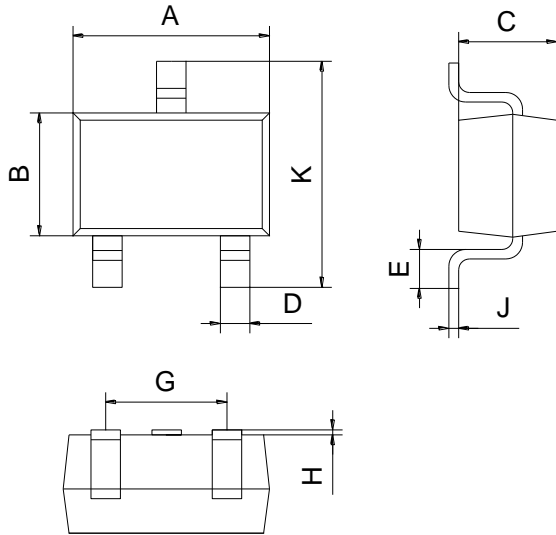

SOT-323		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.90	1.10
D	0.15	0.35
E	0.25	0.40
G	1.20	1.40
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (Unit: mm)

SOT-323

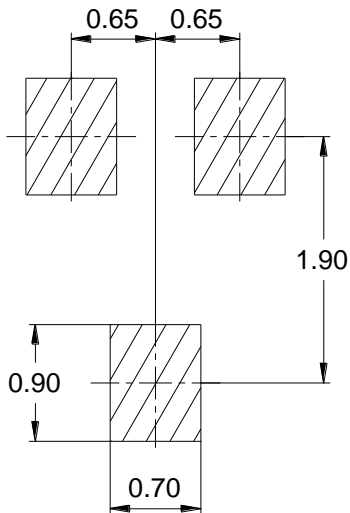

Package	Reel	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)
SOT -323	3000pcs	7inch	45,000pcs	203×203×195	180,000pcs	438×438×220