




FEATURES

- Ideal for surface mounted applications
- Low leakage current
- Glass passivated chips
- High temperature soldering guaranteed :
250°C/10 seconds/.375" , (9.5mm) lead lengths

DO-213AA / MINI MELF

MECHANICAL DATA

Case : Molded plastic use UL94V-0 recognized flame retardant epoxy
 Terminals : Plated terminals, solderable per MIL-STD-202, Method208
 Polarity : Color band on body denotes cathode
 Mounting position : Any
 Weight : 0.036gram

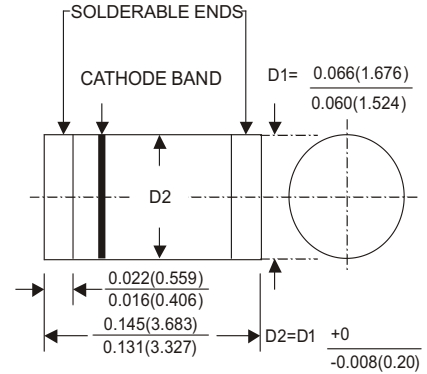

Dimension in inches (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temp. unless otherwise specified
 Single phase, half sine wave, 60Hz, resistive or inductive load
 For capacitive load, derate current by 20%

	SYMBOL	HGL 341A	HGL 341B	HGL 341D	HGL 341G	HGL 341J	HGL 341K	HGL 341M	UNITS
Maximum Current Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current $T_T=55^\circ\text{C}$	$I_{(AV)}$	1.0							Amps
Peak Forward Surge Current Single Sine-Wave on Rated Load (JEDEC Method)	I_{FSM}	10							Amps
Maximum Instantaneous Forward Voltage Drop at 1.0A DC	V_F	1.1		1.3		1.75		Volts	
Maximum DC Reverse Current $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=125^\circ\text{C}$	I_R	5.0				100			μA
Maximum Reverse Recovery Time, Test Conditions : $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$	T_{RR}	50				75			nS
Typical Junction Capacitance	C_J	17				15			pF
Operating Junction and Storage Temperature Range	T_J T_{STG}	-55 to +150							$^\circ\text{C}$



FIG. 1 – DERATING CURVE FOR OUTPUT RECTIFIER CURRENT

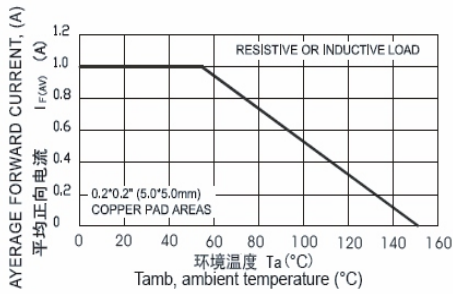


FIG. 2 – MAXIMUM NON – REPETITIVE PEAK FORWARD SURGE CURRENT

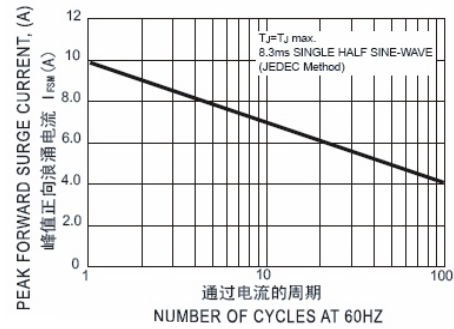


FIG. 3 – TYPICAL REVERSE CHARACTERISTICS

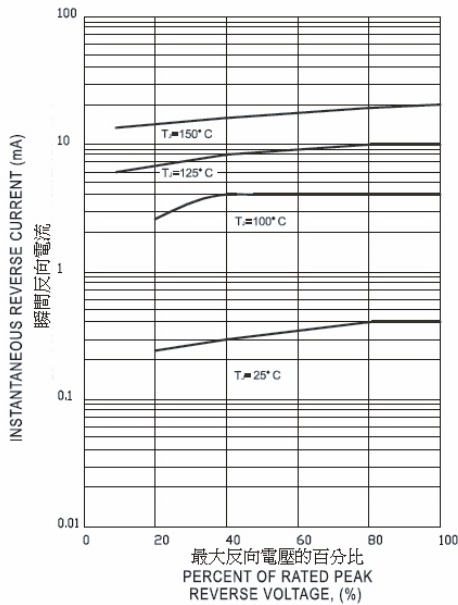


FIG. 4 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

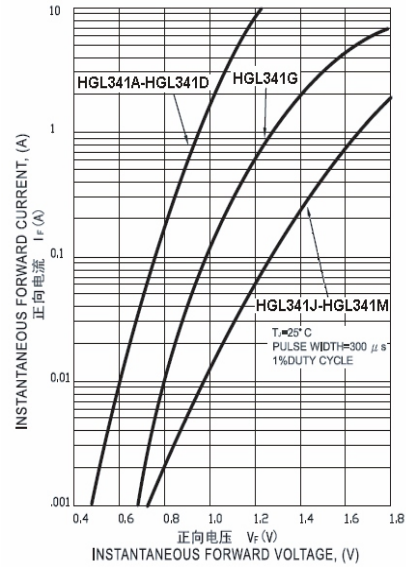


FIG. 5 – TYPICAL JUNCTION CAPACITANCE


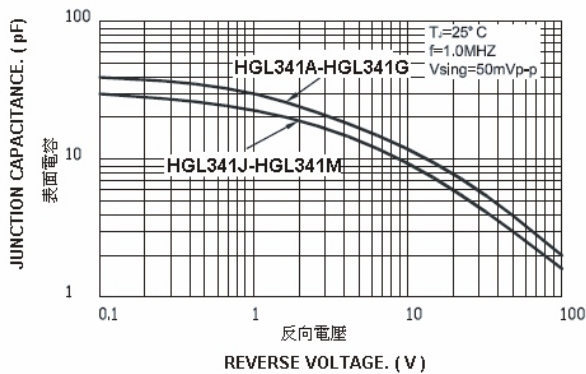


FIG. 6 – TYPICAL TRANSIENT THERMAL IMPEDANCE

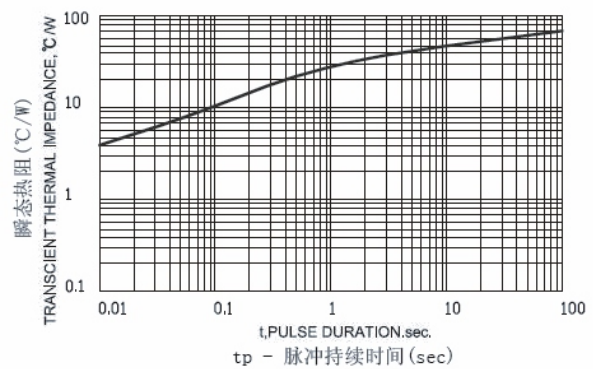

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-213AA	5000/REEL	80000	36.0X35.8X36.5	18.00	16.00